
FindFace Security

Release 4.2.1

NtechLab

Jun 16, 2023

Contents

1	Administrator's Guide	3
1.1	Architecture	3
1.2	System Requirements	7
1.3	Licensing Principles	8
1.4	Deploy FindFace Security	8
1.5	First Steps after Deployment	34
1.6	Work with FindFace Security	37
1.7	Advanced Functionality	71
1.8	Maintenance and Troubleshooting	99
1.9	Appendices	123
2	Operator's Guide	171
2.1	Web Interface	171
2.2	Search Databases	171
2.3	Real-time Face Identification Events	174
2.4	Organize Events with Episodes	180
2.5	Dossier	183
2.6	Video Wall	186
2.7	Mobile App	187
3	Integrations	193
3.1	HTTP API	193
3.2	Webhooks	194
3.3	Partner Integrations	205
3.4	Plugins	215
	Python Module Index	229
	Index	231

FindFace Security is a video-based biometric identification system that automates Security and Hospitality Operations Management. Based on [FindFace Enterprise Server](#), a cutting-edge AI facial recognition technology, FindFace Security is a turnkey solution that you can harness in such areas as retail, banking, social networking, entertainment, sports, event management, dating services, video surveillance, public safety, homeland security, and others.

FindFace Security detects and identifies human faces, and notifies responsible officials about their appearance. It can also recognize such facial attributes as gender, age, emotions, glasses, face mask, beard, and many others, and display this information in a face recognition event.

The integrated 2D anti-spoofing system ensures that it is a live person in front of a camera and eliminates the possibility of fraud using images on paper or mobile device screens.

Early recognition of the arrival of unwanted persons and VIP guests allows for solving the following problems:

- Operational losses due to fraudulent activity
- Reputational losses and conflicts
- Better catering to the needs of VIP guests
- Prevention of life-threatening situations

FindFace Security supports the integration of third-party solutions via [HTTP API](#), [webhooks](#), and [plugins](#), so you can enhance your current system or application with face recognition functionality.

Full list of features:

- AI-based architecture.
- Fast and robust real-time biometric identification against dossier databases.
- Increased performance and fault-tolerance in high load systems with numerous cameras and clients.
- Support for both live video and archives.
- Quick dossier database creation.
- Possibility of distributing dossier database among several hosts with synchronization and replication.
- Dossier customization.
- Deduplication support for events and dossiers.
- Face verification.
- AI recognition of gender, age, emotions, glasses, beard, face mask, and other face attributes.
- AI face liveness detector.
- AI recognition of a person.
- Real-time statistics on in-video faces and silhouettes.
- Video surveillance.
- Database search.
- Extended set of search filters.
- Advanced user management.
- Password- and certificate-based authentication.
- CPU- and GPU-based acceleration for your choice.
- Developer-friendly installer and user-friendly interface.

- Single- and multi-host deployment.
- Network or on-premise licensing.
- Integration via HTTP API, webhooks, and python plugins.
- Integrations with favored vendors.
- Mobile app.

You are going to find this guide most useful if you are an expert of the following kind:

- FindFace Security administrator
- Security manager
- Hospitality manager
- Maintenance engineer
- System integration engineer who is going to integrate face recognition services into their system.

1.1 Architecture

Though you mostly interact with FindFace Security through its web interface, be sure to take a minute to learn the FindFace Security architecture. This knowledge is essential for the FindFace Security deployment, integration, maintenance, and troubleshooting.

In this chapter:


- *Architectural Elements*
 - *Architecture scheme*
 - *FindFace Core*
 - *FindFace Security Application Module*
- *Single- and Multi-Host Deployment*
- *CPU- and GPU-acceleration*

1.1.1 Architectural Elements

FindFace Security consists of the following fundamental architectural elements:

- FindFace core, a cutting-edge AI-based face recognition technology that can be used as a separate product [FindFace Enterprise Server](#).
- FindFace Security, which is a turnkey application module for FindFace Enterprise Server.

Architecture scheme

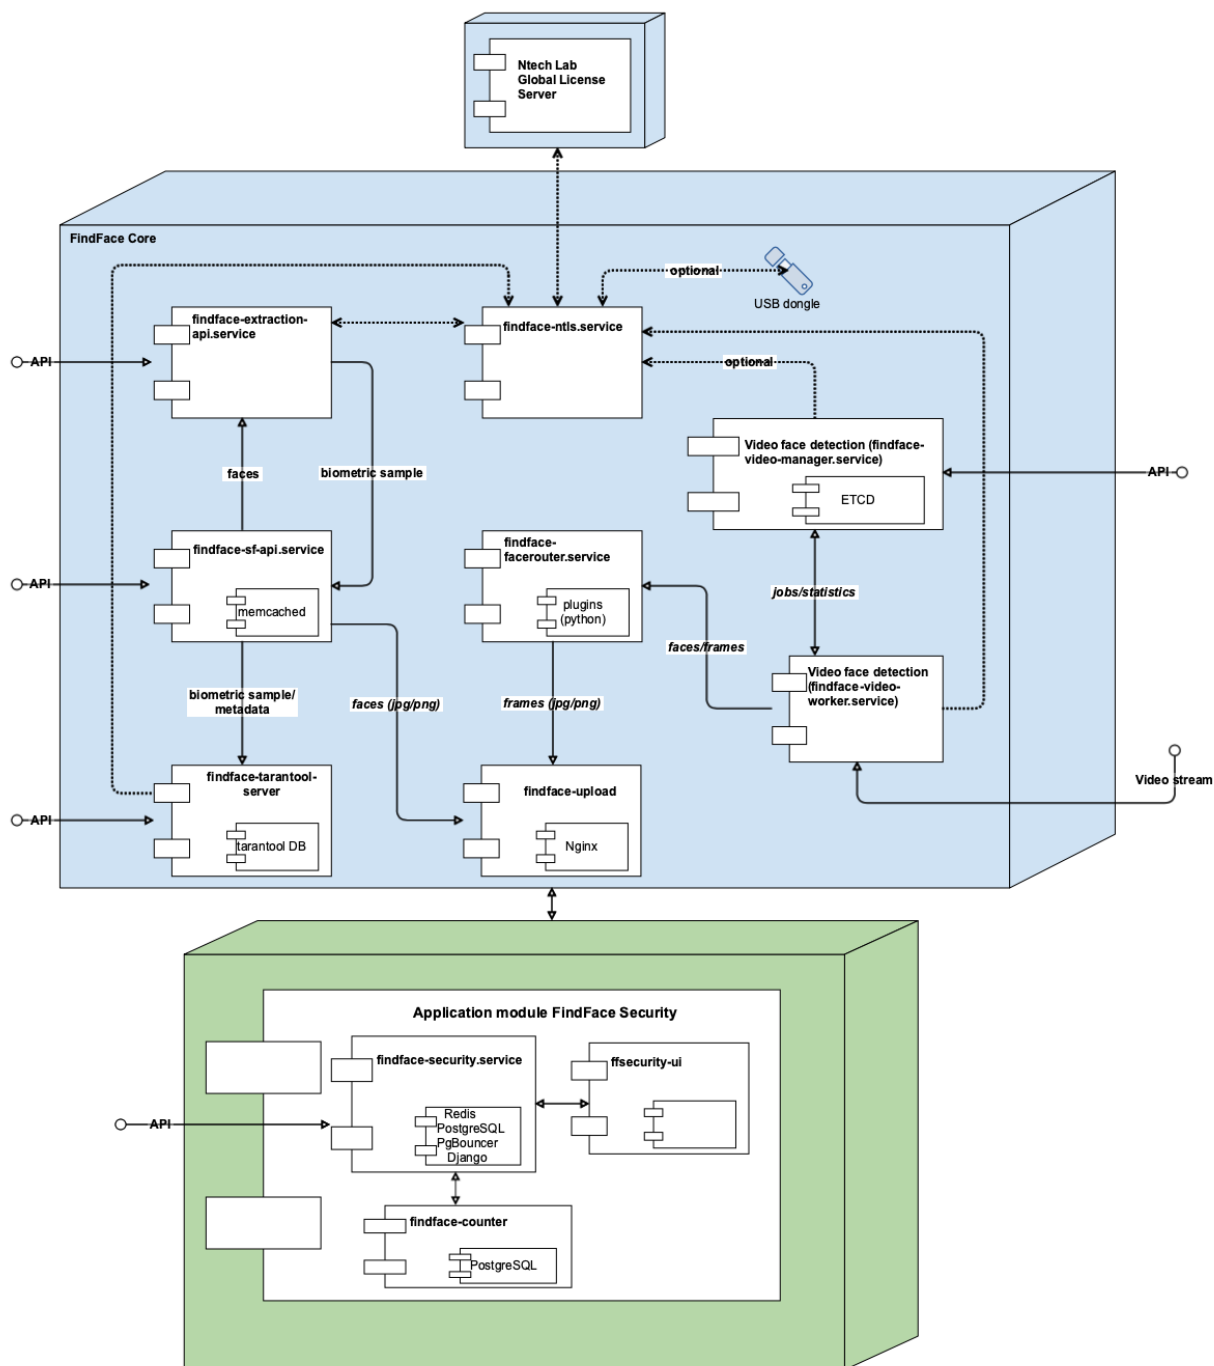

FindFace Core

The FindFace core includes the following components:

Component	Description	Vendor
findface-extraction-api	Service that uses neural networks to detect a face in an image and extract a face biometric sample (feature vector). It also performs recognition of face attributes such as gender, age, emotions, beard, glasses, face mask, and others, and silhouette recognition (if configured). CPU- or GPU-acceleration.	NtechLab own deployment
findface-sf-api	Service that implements HTTP API for face detection and face recognition.	
findface-tarantool-server	Service that provides interaction between the <code>findface-sf-api</code> service and the biometric database (database that stores face biometric samples) powered by Tarantool.	
findface-upload	NginX-based web server used as a storage for original images, thumbnails and normalized face images.	
findface-facerouter	Service used to define processing directives for detected faces. In FindFace Security, its functions are performed by <code>findface-security</code> (see <i>FindFace Security Application Module</i>). If necessary, you can still deploy and enable this component for integration purposes (see <i>Plugins</i>).	
findface-video-manager	Service, part of the video face detection module, that is used for managing the video face detection functionality, configuring the video face detector settings and specifying the list of to-be-processed video streams.	
findface-video-worker	Service, part of the video face detection module, that recognizes a face in the video and posts its normalized image, full frame and metadata (such as the camera ID and detection time) to the <code>findface-facerouter</code> service for further processing according to given directives. CPU- or GPU-acceleration.	
findface-ntls	License server which interfaces with the NtechLab Global License Server or a USB dongle to verify the <i>license</i> of your FindFace Security instance.	Tarantool
Tarantool	Third-party software which implements the biometric database that stores extracted biometric samples (feature vectors) and face identification events. The system data, dossiers, user accounts, and camera settings are stored in PostgreSQL (part of the FindFace Security application module).	
etcd	Third-party software that implements a distributed key-value store for <code>findface-video-manager</code> . Used as a coordination service in the distributed system, providing the video face detector with fault tolerance.	etcd
NginX	Third-party software which implements the system web interfaces.	nginx
mem-cached	Third-party software which implements a distributed memory caching system. Used by <code>findface-extraction-api</code> as a temporary storage for extracted face biometric samples before they are written to the biometric database powered by Tarantool.	mem-cached

FindFace Security Application Module

The FindFace Security application module includes the following components:

Component	Description	Vendor
findface-security	Component that serves as a gateway to the FindFace core. Provides interaction between the FindFace Core and the web interface, the system functioning as a whole, HTTP and web socket, biometric monitoring, event notifications, episodes, webhooks, and counters. Includes the following internal services: NTLS checker, Webhooks manager, Persons clusterizator, Event episodes manager, and Counter manager. The last four can be disabled via the <code>findface-security</code> configuration file.	NtechLab own deployment
ffsecurity-ui	Main web interface that is used to interact with FindFace Security. Allows you to work with face identification events, search for faces, manage cameras, users, dossiers, and watch lists, collect real-time statistics, and many more.	
findface-counter	Service used for face deduplication.	
PostgreSQL	Third-party software which implements the main system database that stores detailed and categorized dossiers on particular persons, as well as data for internal use such as user accounts and camera settings. The face biometric data and face identification events are stored in Tarantool (part of the FindFace core).	PostgreSQL
Pg-bouncer	Third-party software, a lightweight connection pooler for PostgreSQL. Optional, used to increase the database performance under high load.	Pg-Bouncer
Redis	Third-party software which implements a message broker inside <code>findface-security</code> .	Redis
Django	Third-party software which implements a web framework for the FindFace Security web interface.	Django

See also:

Components in Depth

1.1.2 Single- and Multi-Host Deployment

You can deploy FindFace Security on a single host or in a cluster environment. If you opt for the latter, we offer you one of the following deployment schemes:

- Deploy FindFace Security standalone and distribute additional `findface-video-worker` components across multiple hosts.
- Distribute the FindFace Security components across multiple hosts. If necessary, set up load balancing.

See *Guide to Typical Cluster Installation* for details.

1.1.3 CPU- and GPU-acceleration

The `findface-extraction-api` and `findface-video-worker` services can be either CPU- or GPU-based. During installation from the developer-friendly *installer*, you will have an opportunity to choose the acceleration type you need.

If you opt to install FindFace Security from the *repository package*, deploy the `findface-extraction-api` and `findface-video-worker-cpu` packages on a CPU-based server, and the `findface-extraction-api-gpu` and/or `findface-video-worker-gpu` packages on a GPU-based server.

Important: Refer to *System Requirements* when choosing hardware configuration.

Important: If the resolution of a camera(s) in use is more than 1280x720px, it is strongly recommended to use the GPU-accelerated package `findface-video-worker-gpu`.

Note: The *liveness detector* is much slower on CPU than on GPU.

1.2 System Requirements

To calculate the FindFace Security host(s) characteristics, use the requirements provided in this chapter.

Tip: Be sure to learn about the FindFace Security *architecture* first.

In this chapter:

- *Basic Configuration*

1.2.1 Basic Configuration

Important: If the resolution of a camera(s) in use is more than 1280x720px, it is strongly recommended to use the GPU-accelerated package `findface-video-worker-gpu`.

	Minimum	Recommended
CPU	Intel Core i5 CPU with 4 physical cores 2.8 GHz	Intel Xeon E5v3 with 6 physical cores, or higher or similar CPU
	The own needs of FindFace Security require 2 cores HT > 2.5 GHz. The characteristics also depend on the number of cameras in use. A single camera 720p@25FPS requires 2 cores >2.5 GHz. AVX2 support	
GPU (optional)	Nvidia Geforce® GTX 980 4GB	Nvidia Geforce® GTX 1080+ with 8+Gb RAM
	Supported series: GeForce (Maxwell, Pascal, Turing, and above), Tesla (Maxwell, Pascal, Volta v100, Turing, and above)	
RAM	10 Gb	16+ Gb
	The own needs of FindFace Security require 8 Gb. The RAM consumption also depends on the number of cameras in use. A single camera 720p@25FPS requires 2 GB RAM	
HDD	16 Gb	16+ Gb
	The own needs of the operating system and FindFace Security require 15 GB. The total volume is subject to the required depth of the event archive in the database and in the log, at the rate of 1.5 Mb per 1 event	
Operating system	Ubuntu 16.04, 18.04, x64 only	

Tip: For more accurate hardware selection, contact our support team by support@ntechlab.com.

1.3 Licensing Principles

FindFace Security is licensed by the following criteria:

1. The number of extracted biometric samples. In the course of the FindFace Security functioning, biometric samples are extracted from faces detected in the video and from dossier photos, as well as when building so-called centroids during *person clusterization*.

Overall, the licensing scheme is as follows:

- Events: 1 event of video face detection = 1 face in a license.
 - Dossier: 1 photo in a dossier = 1 face in a license.
 - Persons: 1 person = 1 face in a license.
2. The number of cameras in use.
 3. The number of the `findface-extraction-api` model instances in use.
 4. Face features recognition: gender/age/emotions/glasses/beard/face mask.
 5. Face liveness detection.
 6. Integration with partners.

You can choose between the online and on-premise (aka offline) licensing:

- The online licensing is done via the NtechLab Global License Manager `license.ntechlab.com` and requires a stable internet connection and DNS. Upon being disconnected from the internet, the system will continue working off-grid for 4 hours. Inform your manager if you need to prolongate this period (up to 2 days).
- The on-premise (offline) licensing requires a USB port on the physical server with the `findface-ntls` component (license server in the *FindFace core*), that will be used to plug in a provided USB dongle.

For the system to function, one `findface-ntls` instance should be enough. If, for some reason, your system requires more license servers, contact your NtechLab manager beforehand to prevent your system from being blocked.

See also:

Licensing

1.4 Deploy FindFace Security

For your convenience, we offer you several deployment options:

- Deploy from a console installer
- Deploy step-by-step from an APT repository

Important: Starting services `findface-extraction-api-gpu` and `findface-video-worker-gpu` for the first time after deployment may take up a considerable amount of time, up to 45 minutes, due to the caching process.

1.4.1 Deploy from Console Installer

To deploy FindFace Security, use a developer-friendly console installer.

Tip: Before deployment, be sure to consult the [system requirements](#).

Important: The FindFace Security host must have a static IP address in order to be running successfully. To make the IP address static, open the `etc/network/interfaces` file and modify the current primary network interface entry as shown in the case study below. Be sure to substitute the suggested addresses with the actual ones, subject to your network specification.

```
sudo vi /etc/network/interfaces

iface eth0 inet static
address 192.168.112.144
netmask 255.255.255.0
gateway 192.168.112.254
dns-nameservers 192.168.112.254
```

Restart networking.

```
sudo service networking restart
```

Be sure to edit the `etc/network/interfaces` file with extreme care. Please refer to the [Ubuntu guide on networking](#) before proceeding.

To deploy FindFace Security from the console installer, do the following:

1. Download the installer file `findface-security-and-server-4.2.1.run`.
2. Put the `.run` file into some directory on the designated host (for example, `/home/username`).
3. From this directory, make the `.run` file executable.

```
chmod +x findface-security-and-server-4.2.1.run
```

4. Execute the `.run` file.

```
sudo ./findface-security-and-server-4.2.1.run
```

The installer will ask you a few questions and perform several automated checks to ensure that the host meets the system requirements. Fill out the prompts appropriately once requested. The questions are the following:

1. Product to install: FindFace Security.
2. Installation type:
 - 1: install FindFace Security standalone.
 - 2: install FindFace Security and configure it to interact with additional remote `findface-video-worker` instances.

Tip: To install only `findface-video-worker` on a host, refer to [Additional findface-video-worker deployment on remote hosts](#).

- 3: install only the apt repository that can be further used for the *step-by-step deployment*.

Important: This installation type doesn't provide installation of neural network models essential for the `findface-extraction-api` functioning. Be sure to *manually install* them on the host(s) with `findface-extraction-api`.

- 4: fully customized installation.

Important: Be sure to *manually install* neural network models on the host(s) with `findface-extraction-api`.

3. Type of `findface-video-worker` package: CPU or GPU.

4. Type of `findface-extraction-api` package: CPU or GPU.

Once all the questions answered, the answers will be saved to a file `/tmp/<findface-installer-*>.json`. You can edit this file and use it to install FindFace Security on other hosts without having to answer the questions again.

Should you choose to install FindFace Security standalone, its components will be automatically installed, configured and/or started in the following configuration:

Important: In the case of a clean install, the installer will automatically configure `findface-extraction-api` to use the `ifruit_320` neural network. Otherwise, you will be able to choose between `ifruit_320` and the previous model. It is strictly not recommended to use the installer to update the system. See *Update FindFace Security to 4.2* for the instructions.

Service	Configuration
postgresql-9.5 (Ubuntu 16.04) or postgresql-10 (Ubuntu 18.04)	Installed and started.
redis-server	Installed and started.
etcd	Installed and started.
pgbouncer	Installed and started.
memcached	Installed and started.
nginx	Installed and started.
django	Installed and started as a web framework for the FindFace Security web interface.
findface-ntls	Installed and started.
findface-tarantool-server	Installed and started. The number of instances (shards) is calculated using the formula: $N = \max(\min(\text{mem_mb} // 2000, \text{cpu_cores}), 1)$, i.e. it is equal to the RAM size in MB divided by 2000, or the number of CPU physical cores (but at least 1 shard).
findface-extraction-api	Installed and started.
findface-sf-api	Installed and started.
findface-upload	Installed.
findface-video-manager	Installed and started (CPU/GPU-acceleration).
findface-video-worker-*	Installed and started.
findface-data-*	Neural network models for face and face features recognition (gender, age, emotions, glasses, beard, and face mask). Installed.
findface-gpudetector-data/	NTechLab gpudetector data. Installed.
python3-ntech.ffsecurity-client	NtechLab FindFace Security API python client library. Installed.
findface-security	Installed and started.
findface-counter	Installed and started.
jq	Installed. Used to pretty-print API responses from FindFace Security.

After the installation is complete, the following output is shown on the console:

Tip: Be sure to save this data: you will need it later.

```
#####
#                               Installation is complete                               #
#####
- upload your license to http://172.20.77.17/#/license/
- user interface: http://172.20.77.17/
  superuser:      admin
  password:       admin
  documentation:  http://172.20.77.17/doc/
```

5. Upload the FindFace Security license file via the main web interface `http://<Host_IP_address>/#/license`. To access the web interface, use the provided admin credentials.

Note: The host IP address is shown in the links to FindFace web services in the following way: as an external IP address if the host belongs to a network, or 127.0.0.1 otherwise.

Important: Do not disclose the superuser (Super Administrator) credentials to others. To administer the system, create a new user with administrator privileges. Whatever the role, the Super Administrator cannot be deprived of its rights.

6. To automatically install FindFace Security on another host without answering the installation questions, use the /tmp/<findface-installer-*>.json file. Execute:

```
sudo ./findface-security-and-server-4.2.1.run -f /tmp/<findface-installer-*>.json
```

Tip: You can find an example of the installation file in *Installation File*.

1.4.2 Deploy Step-by-Step from Repository

This section will guide you through the FindFace Security step-by-step deployment process. Follow the instructions below minding the sequence.

In this section:

- *Install APT Repository*
- *Prerequisites*
- *Provide Licensing*
- *Deploy Main Database*
- *Deploy FindFace Core*
- *Deploy FindFace Security Application Module and Biometric Database*

Install APT Repository

First of all, install the FindFace apt repository as follows:

1. Download the installer file findface-security-and-server-4.2.1.run.
2. Put the .run file into some directory on the designated host (for example, /home/username).
3. From this directory, make the .run file executable.

```
chmod +x findface-security-and-server-4.2.1.run
```

4. Execute the .run file.

```
sudo ./findface-security-and-server-4.2.1.run
```


The installer will ask you a few questions and perform several automated checks to ensure that the host meets the system requirements. Fill out the prompts appropriately once requested. The questions are the following:

1. Product to install: FindFace Security.
2. Installation type: repo: Don't install anything, just set up the APT repository.
3. Neural network models to install if necessary. To select a model(s), deselect all those on the list by entering `-*` in the command line first, then select the required model by entering its sequence number (keyword): for example, `1 3`. Enter done to save your selection and proceed to another step.

Important: At least one model for face biometry has to be installed.

After that, the FindFace apt repository will be automatically installed.

Prerequisites

FindFace Security requires such third-party software as PostgreSQL, PgBouncer, Redis, etcd, and memcached. Do the following:

1. Install the prerequisite packages as such:

On Ubuntu 16.04:

```
sudo apt update
sudo apt install -y postgresql-9.5 redis-server etcd memcached pgbouncer
```

On Ubuntu 18.04:

```
sudo apt update
sudo apt install -y postgresql-10 redis-server etcd memcached pgbouncer
```

2. Open the memcached configuration file. Set the maximum memory to use for items in megabytes: `-m 512`. Set the max item size: `-I 16m`. If one or both of these parameters are absent, simply add them in the file.

```
sudo vi /etc/memcached.conf

-m 512
-I 16m
```

3. Give a strong password to the ntech user (9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3 in the example below). Output the credentials to the pgbouncer user list.

```
echo '"ntech" "9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3"' | sudo tee -a /etc/pgbouncer/
↪userlist.txt
```

4. Configure pgbouncer. In `/etc/pgbouncer/pgbouncer.ini`, add the ffsecurity database to the databases section. Configure other parameters, as shown in the example below.

```
sudo vi /etc/pgbouncer/pgbouncer.ini

[databases]
ffsecurity = dbname=ffsecurity host=localhost port=5432 user=ntech

...
auth_type = plain
pool_mode = transaction
max_client_conn = 16384
syslog = 1
listen_port = 5439
```

5. Enable the prerequisite services autostart and launch the services:

On Ubuntu 16.04:

```
sudo systemctl enable postgresql@9.5-main.service redis-server etcd.service_
↪memcached.service pgbouncer.service
sudo systemctl start postgresql@9.5-main.service redis-server etcd.service_
↪memcached.service pgbouncer.service
```

On Ubuntu 18.04:

```
sudo systemctl enable postgresql@10-main.service redis-server etcd.service_
↪memcached.service pgbouncer.service
sudo systemctl start postgresql@10-main.service redis-server etcd.service_
↪memcached.service pgbouncer.service
```

Provide Licensing

See also:

Licensing Principles

You receive a license file from your NTechLab manager. If you opt for the on-premise licensing, we will also send you a USB dongle.

The FindFace Security licensing is provided as follows:

1. Deploy `findface-ntls`, license server in the FindFace core.

Important: There must be only one `findface-ntls` instance in each FindFace Security installation.

Tip: In the `findface-ntls` configuration file, you can change the license folder and specify your proxy server IP address if necessary. You can also change the `findface-ntls` web interface remote access settings. See *findface-ntls* for details.

```
sudo apt update
sudo apt install -y findface-ntls
sudo systemctl enable findface-ntls.service && sudo systemctl start findface-ntls.
↪service
```

2. Upload the license file via the `findface-ntls` web interface in one of the following ways:

- Navigate to the `findface-ntls` web interface `http://<NTLS_IP_address>:3185/#/`. Upload the license file.

Tip: Later on, use the FindFace Security main web interface to consult your license information, and upgrade or extend your license (*Settings -> License*).

- Directly put the license file into the license folder (by default, `/opt/ntech/license`, can be changed in the `/etc/findface-ntls.cfg` configuration file).

3. For the on-premise licensing, insert the USB dongle into a USB port.

4. If the licensable components are installed on remote hosts, specify the IP address of the `findface-ntls` host in their configuration files. See *findface-extraction-api*, *findface-tarantool-server*, *Video face detection: findface-video-manager and findface-video-worker* for details.

See also:

View and Update License

Deploy Main Database

In FindFace Security, the main system database is based on PostgreSQL. To deploy the main database, do the following:

1. Open the pgbouncer list of users `/etc/pgbouncer/userlist.txt`. Copy the `ntech` user's password (`9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3` in the example below).

```
sudo cat /etc/pgbouncer/userlist.txt

"ntech" "9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3"
```

2. Using the **PostgreSQL** console, create a new user `ntech` with the copied password, and databases `ffsecurity` and `ffcounter` in PostgreSQL.

```
sudo -u postgres psql

postgres=# CREATE ROLE ntech WITH LOGIN PASSWORD '9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3'
↪';

postgres=# CREATE DATABASE ffsecurity WITH OWNER ntech ENCODING 'UTF-8' LC_
↪COLLATE='en_US.UTF-8' LC_CTYPE='en_US.UTF-8' TEMPLATE template0;

postgres=# CREATE DATABASE ffcounter WITH OWNER ntech ENCODING 'UTF-8' LC_COLLATE=
↪'C.UTF-8' LC_CTYPE='C.UTF-8' TEMPLATE template0;
```

Tip: To quit from the **PostgreSQL** console, type `\q` and press Enter.

3. Allow authentication by UID of a socket client in **PostgreSQL**. Restart **PostgreSQL**.

On Ubuntu 16.04:

```
echo 'local all ntech peer' | sudo tee -a /etc/postgresql/9.5/main/pg_hba.conf
sudo systemctl restart postgresql@9.5-main.service
```

On Ubuntu 18.04:

```
echo 'local all ntech peer' | sudo tee -a /etc/postgresql/10/main/pg_hba.conf
sudo systemctl restart postgresql@10-main.service
```

Deploy FindFace Core

To deploy the FindFace core, do the following:

Tip: You can find the description of the FindFace core components and their configuration parameters in [Architecture](#) and [Components in Depth](#).

1. Install the FindFace core components:

```
sudo apt update
sudo apt install -y findface-tarantool-server findface-extraction-api findface-sf-
↪api findface-upload findface-video-manager findface-video-worker-cpu
```

Note: To install the GPU-accelerated `findface-extraction-api` component, use `findface-extraction-api-gpu` instead of `findface-extraction-api` in the command.

Note: To install the GPU-accelerated `findface-video-worker` component, use `findface-video-worker-gpu` instead of `findface-video-worker-cpu` in the command. If you have several video cards on your server, see [Multiple Video Cards Usage](#).

Important: Be sure to *manually install* neural network models on the host(s) with `findface-extraction-api`.

2. In the `findface-sf-api` configuration file, enable the `allow-return-facen` parameter.

```
sudo vi /etc/findface-sf-api.ini

...
limits:
  ...
  allow-return-facen: true
...
```

3. In the `findface-extraction-api` configuration file, enable recognition models for face features such as gender, age, emotions, glasses, beard, and face mask, subject to your needs. Be sure to choose the right

acceleration type for each model, matching the acceleration type of findface-extraction-api: CPU or GPU. Be aware that findface-extraction-api on CPU can work only with CPU-models, while findface-extraction-api on GPU supports both CPU- and GPU-models. See [Face Features Recognition](#) for details.

```
sudo vi /etc/findface-extraction-api.ini

models:
  age: faceattr/age.v1.cpu.fnk
  emotions: faceattr/emotions.v1.cpu.fnk
  face: face/ifruit_320.cpu.fnk
  gender: faceattr/gender.v2.cpu.fnk
  beard: faceattr/beard.v0.cpu.fnk
  glasses3: faceattr/glasses3.v0.cpu.fnk
  medmask3: faceattr/medmask3.v1.cpu.fnk
```

The following models are available:

Face feature	Acceleration	Configuration file parameter
face (biometry)	CPU	face: face/ifruit_320.cpu.fnk face: face/ifruit_160.cpu.fnk
	GPU	face: face/ifruit_320.gpu.fnk face: face/ifruit_160.gpu.fnk
age	CPU	age: faceattr/age.v1.cpu.fnk
	GPU	age: faceattr/age.v1.gpu.fnk
gender	CPU	gender: faceattr/gender.v2.cpu.fnk
	GPU	gender: faceattr/gender.v2.gpu.fnk
emotions	CPU	emotions: faceattr/emotions.v1.cpu.fnk
	GPU	emotions: faceattr/emotions.v1.gpu.fnk
glasses	CPU	glasses3: faceattr/glasses3.v0.cpu.fnk
	GPU	glasses3: faceattr/glasses3.v0.gpu.fnk
beard	CPU	beard: faceattr/beard.v0.cpu.fnk
	GPU	beard: faceattr/beard.v0.gpu.fnk
face mask	CPU	medmask3: faceattr/medmask3.v1.cpu.fnk
	GPU	medmask3: faceattr/medmask3.v1.gpu.fnk

Tip: To disable a recognition model, simply pass an empty value to a relevant parameter. Do not remove the parameter itself as in this case the system will be searching for the default model.

```
models:
  gender: ""
  age: ""
  emotions: ""
```

4. Open the `/etc/findface-video-worker-cpu.ini` (`/etc/findface-video-worker-gpu.ini`) configuration file. In the `mgr-static` parameter, specify the `findface-video-manager` host IP address, which provides `findface-video-worker` with settings and the video stream list. In the `capacity` parameter, specify the maximum number of video streams to be processed by `findface-video-worker`. In the `streamer` section, specify the IP address and port to access the [video wall](#). The streamer port must be set to 18999.

```
sudo vi /etc/findface-video-worker-cpu.ini
sudo vi /etc/findface-video-worker-gpu.ini

mgr-static=127.0.0.1:18811

capacity=10

[streamer]
#-----
## streamer/shots webserver port, 0=disabled
## type:number env:CFG_STREAMER_PORT longopt:--streamer-port
port = 18999
## streamer url - how to access this worker on streamer_port
## type:string env:CFG_STREAMER_URL longopt:--streamer-url
url = 127.0.0.1:18999
```

5. Enable the FindFace core services autostart and launch the services.

```
sudo systemctl enable findface-extraction-api findface-sf-api findface-video-
↪manager findface-video-worker-cpu
sudo systemctl start findface-extraction-api findface-sf-api findface-video-
↪manager findface-video-worker-cpu
```

Deploy FindFace Security Application Module and Biometric Database

To deploy the FindFace Security application module, do the following:

1. Install the `findface-security`, `ffsecurity-ui`, and `findface-counter` components. Enable the `findface-counter` autostart and launch the service.

```
sudo apt update
sudo apt install -y ffsecurity ffsecurity-ui findface-counter
sudo systemctl enable findface-counter && sudo systemctl start findface-counter
```

2. Migrate the database architecture from FindFace Security to **PostgreSQL**, create user groups with *predefined* rights and the first user with administrator rights (a.k.a. Super Administrator).

Important: Super Administrator cannot be deprived of its rights, whatever the role.

```
sudo findface-security migrate
sudo findface-security create_groups
sudo findface-security create_default_user
```

3. Create a structure of the Tarantool-based biometric database.

```
sudo findface-security make_tnt_schema | sudo tee /etc/ffsecurity/tnt_schema.lua
```

4. Open the `/etc/tarantool/instances.enabled/FindFace.lua` configuration file. Check whether it contains the `dofile` command, `meta_indexes` and `meta_scheme` definitions, as in the example below.

```
sudo vi /etc/tarantool/instances.enabled/FindFace.lua

dofile("/etc/ffsecurity/tnt_schema.lua")
-- host:port to bind, HTTP API
```

(continues on next page)

(continued from previous page)

```
FindFace = require("FindFace")
FindFace.start("127.0.0.1", 8001, {
  license_ntls_server="127.0.0.1:3133",
  meta_indexes=meta_indexes,
  meta_scheme = meta_scheme
})
```

5. Enable the `findface-tarantool-server` service autostart and launch the service.

```
sudo systemctl enable tarantool@FindFace.service && sudo systemctl start_
↪tarantool@FindFace.service
```

6. Open the `/etc/ffsecurity/config.py` configuration file. Specify the following parameters:

- `SERVICE_EXTERNAL_ADDRESS`: FindFace Security IP address or URL prioritized for the Genetec integration and webhooks. Once this parameter not specified, the system uses `EXTERNAL_ADDRESS` for these purposes. To use Genetec and webhooks, be sure to specify at least one of those parameters: `SERVICE_EXTERNAL_ADDRESS`, `EXTERNAL_ADDRESS`.
- `EXTERNAL_ADDRESS`: (Optional) IP address or URL that can be used to access the FindFace Security web interface. Once this parameter not specified, the system auto-detects it as the external IP address. To access FindFace Security, you can use both the auto-detected and specified IP addresses.
- `VIDEO_DETECTOR_TOKEN`: to authorize the video face detection module, come up with a token and specify it here.
- `VIDEO_MANAGER_ADDRESS`: IP address of the `findface-video-manager` host.
- `NTLS_HTTP_URL`: IP address of the `findface-ntls` host.
- `ROUTER_URL`: IP address of the `findface-security` host that will receive detected faces from the `findface-video-worker` instance(s). Specify either external or internal IP address, subject to the network through which `findface-video-worker` interacts with `findface-security`. Change the default port, subject to the [redirect settings](#) from HTTP to HTTPS, or omit it leaving only the IP address.
- `SF_API_ADDRESS`: IP address of the `findface-sf-api` host.
- `DATABASES` (section): fill it in as such: `'PORT': 5439, 'USER': 'ntech', 'PASSWORD': '<password from /etc/pgbouncer/userlist.txt>'` (see [Prerequisites](#)).

Tip: If necessary, ensure data security by enabling [SSL](#).

Tip: If necessary, set `'IGNORE_UNMATCHED': True` to disable logging events for faces which have no match in the dossiers (negative verification result). Enable this option if the system has to process a large number of faces. The face similarity threshold for verification is defined by the `CONFIDENCE_THRESHOLD` parameter.

Tip: It is recommended to change the `MINIMUM_DOSSIER_QUALITY` default value. This parameter determines the minimum quality of a face in a dossier photo. Photos containing faces of worse quality will be rejected when uploading to a dossier. Upright faces in frontal position are considered the best quality. They result in values around 0, mostly negative (such as -0.00067401276, for example). Inverted faces and large face angles are estimated with negative values some -5 and less. By default, `'MINIMUM_DOSSIER_QUALITY': -2` which is the average quality.

Important: If you enabled recognition models in the findface-extraction-api configuration file, add the following line in the FFSECURITY section: 'EVENTS_FEATURES': ['gender', 'age', 'emotions', 'beard', 'glasses', 'medmask'], subject to the list of enabled models. This line must be placed between SF_API_ADDRESS and LIVENESS_THRESHOLD as shown in the example below. See *Face Features Recognition* for details.

```
sudo vi /etc/ffsecurity/config.py

# =====
# FindFace Security configuration file
# =====
#
# This config file is written in Python's syntax and interpreted at FindFace_
↳ Security
# service startup. You have to restart the service in order to apply changes.
#
# If you have any questions or suggestions, please contact us at support@ntechlab.
↳ com
# =====
# GENERAL SETTINGS
# =====
# enables additional logs
DEBUG = False
# media files directory
MEDIA_ROOT = "/var/lib/ffsecurity/uploads"
# static files directory
STATIC_ROOT = "/var/lib/ffsecurity/static"
# language code
LANGUAGE_CODE = 'en-us'
# time zone
TIME_ZONE = 'UTC'
# Database is used by FindFace Security to store cameras,
# camera groups, watchlists and so on. Only PostgreSQL is supported.
DATABASES = {
    'default': {
        'ENGINE': 'django.db.backends.postgresql',
        'DISABLE_SERVER_SIDE_CURSORS': True,
        'NAME': 'ffsecurity',
        'PORT': 5439, 'USER': 'ntech', 'PASSWORD':
↳ '9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3'
    }
}
# Signature key for session encryption
# Use pwgen -snc 50 1/tr "" "." to generate your own unique key
SECRET_KEY = 'dlc22e3b368f2f8be4caa95b3540ce0c'
# =====
# FINDFACE SECURITY SETTINGS
# =====
# SERVICE_EXTERNAL_ADDRESS is prioritized for FFSecurity webhooks and Genetec_
↳ plugin.
# EXTERNAL_ADDRESS is used instead if SERVICE_EXTERNAL_ADDRESS is not provided.
# You must provide either SERVICE_EXTERNAL_ADDRESS or EXTERNAL_ADDRESS in order
# to be able to work with FFSecurity webhooks and Genetec plugin.
SERVICE_EXTERNAL_ADDRESS = 'http://127.0.0.1'
# EXTERNAL_ADDRESS is used to access objects created inside FFSecurity via_
↳ external links.
```

(continues on next page)

(continued from previous page)

```

EXTERNAL_ADDRESS = ''
# - Base FFSecurity settings -
FFSECURITY = {
    # findface-video-worker authorization token
    'VIDEO_DETECTOR_TOKEN': 'fdc0fea20cf0a734c5e2de1886fc07b4',
    # base face matching confidence threshold
    'CONFIDENCE_THRESHOLD': 0.739,
    # episodes specific matching threshold that is used to join faces in an
    ↳episode
    'EPISODES_THRESHOLD': 0.689,
    # minimum face quality sufficient to add it to a dossier
    'MINIMUM_DOSSIER_QUALITY': -2,
    # skip all unmatched faces
    'IGNORE_UNMATCHED': False,
    # matched events older than EVENTS_MAX_MATCHED_AGE will be automatically
    # deleted (every night at 1:17 am by default)
    'EVENTS_MAX_MATCHED_AGE': 30,
    # same as above but for unmatched events
    'EVENTS_MAX_UNMATCHED_AGE': 30,
    # same as EVENTS_MAX_MATCHED_AGE but for matched full frame images only
    ↳(thumbnails won't be deleted)
    'EVENTS_MAX_FULLFRAME_UNMATCHED_AGE': 30,
    # same as above but for unmatched full frame images only (thumbnails won't be
    ↳deleted)
    'EVENTS_MAX_FULLFRAME_MATCHED_AGE': 30,
    # NTLs licence server url
    'NTLS_HTTP_URL': 'http://127.0.0.1:3185',
    # findface-video-worker face posting address,
    # it must be set to either FFSecurity EXTERNAL_ADDRESS (by default)
    # or findface-facerouter url (in some specific cases)
    'ROUTER_URL': 'http://127.0.0.1',
    # send serialized dossiers, dossier-lists, camera and camera groups in
    ↳webhooks
    'VERBOSE_WEBHOOKS': False,
    'THUMBNAIL_JPEG_QUALITY': 75,
    # FFServer services urls
    'VIDEO_MANAGER_ADDRESS': 'http://127.0.0.1:18810',
    'SF_API_ADDRESS': 'http://127.0.0.1:18411',
    'FFCOUNTER_ADDRESS': 'http://127.0.0.1:17300',
    # additional events features.
    # make sure that corresponding extractors
    # are licensed and enabled at findface-extraction-api config file.
    # available features are: gender, age, emotions, beard, glasses, medmask.
    'EVENTS_FEATURES': [],
    # feature specific confidence thresholds
    'LIVENESS_THRESHOLD': 0.75,
    'EMOTIONS_THRESHOLD': 0.25,
    'BEARD_THRESHOLD': 0.7,
    # -- Persons configuration --
    # rrule (recurrence rule) for scheduling persons clusterization
    'PERSONS_CLUSTERIZATION_SCHEDULE': 'RRULE:FREQ=DAILY;INTERVAL=1;WKST=MO;
    ↳BYHOUR=0;BYMINUTE=0',
    # face to person matching confidence threshold
    'PERSONS_CONFIDENCE_THRESHOLD': 0.739,
    # minimum face quality for handle face in person service
    'PERSON_EVENT_MIN_QUALITY': -2,
    # counters full frame saving options:

```

(continues on next page)

(continued from previous page)

```

# `always` - save always
# `detect` - save only if faces or silhouettes have been detected
# `never` - never save full frames
'COUNTERS_SAVE_FULLFRAME': 'always',
'COUNTERS_FULLFRAME_JPEG_QUALITY': 75,
'COUNTERS_THUMBNAIL_JPEG_QUALITY': 75,
# -- Optional parameters --
# Edit CUSTOM_FIELDS section to customize dossier content.
# Below is an example for integration FindFace Security with Sigur.
# 'CUSTOM_FIELDS': {
#     'dossier_meta': {
#         'items': [
#             {
#                 'name': 'personid',
#                 'default': '',
#                 'label': 'PersonID',
#                 'display': ['list', 'form'],
#                 'description': 'Sigur person ID'
#             },
#             {
#                 'name': 'firstname',
#                 'default': '',
#                 'label': 'First Name',
#                 'display': ['list', 'form'],
#                 'description': 'Sigur first name'
#             },
#             {
#                 'name': 'lastname',
#                 'default': '',
#                 'label': 'Last Name',
#                 'display': ['list', 'form'],
#                 'description': 'Sigur last name'
#             },
#             {
#                 'name': 'version',
#                 'default': '',
#                 'label': 'Version',
#                 'display': ['list', 'form'],
#                 'description': 'Sigur photo version'
#             }
#         ],
#         'filters': [
#             {
#                 'name': 'personid',
#                 'label': 'Sigur person ID filter',
#                 'field': 'personid'
#             }
#         ]
#     },
#     'maximum event age in seconds than could be added to an episode.'
#     'EPISODE_SEARCH_INTERVAL': 60,
#     'If none of these events matched, new episode is created.'
#     'maximum episode duration (episode is closed after)'
#     'EPISODE_MAX_DURATION': 300,
#     'if no new event added to an episode during this timeout, episode will be
    ↪closed.

```

(continues on next page)

(continued from previous page)

```

# 'EPISODE_EVENT_TIMEOUT': 30,
# maximum created thumbnail width
# 'THUMBNAIL_MAX_WIDTH': 320,
# social backend url. Contact support for additional information.
# 'SOCIAL_BACKEND': None,
# 'SOCIAL_HEADERS': {},
# unacknowledged events notification interval
# 'UNACKNOWLEDGED_NOTIFY_INTERVAL': 1,
}
# - FindFace Security user interface configuration dictionary -
FFSECURITY_UI_CONFIG = {
    "event": {
        "features": {
            "f_gender_class": ["male", "female"],
            "age": {
                "f_age_gte": "",
                "f_age_lte": ""
            },
            "f_emotions_class": ["angry", "disgust", "fear", "happy", "sad",
→ "surprise", "neutral"],
            "f_glasses_class": ["none", "eye", "sun"],
            "f_beard_class": ["none", "beard"],
            "f_liveness_class": ["real", "fake"],
            "f_medmask_class": ["none", "correct"],
        }
    }
}
# -- ASGI-server configuration --
# consult support before changing these settings.
# per worker thread pool size.
ASGI_THREADS = 32
UVICORN_SETTINGS = {
    # worker processes count, 'auto' sets it to logical cpu count
    'workers': 'auto',
    'host': 'localhost',
    'port': 8002,
    # websocket worker processes count,
    # 'auto' sets it to logical cpu count, but not more than 8.
    'ws-workers': 'auto',
    'ws-host': 'localhost',
    'ws-port': 8003,
}
# disable unused services to increase
# overall system performance in some cases.
SERVICES = {
    "ffsecurity": {
        "episodes": True,
        "webhooks": True,
        "persons": False,
    }
}
# =====
# FINDFACE SECURITY PLUGINS
# =====
# Uncomment lines below to enable plugins. Please consult documentation for
# a plugin specific settings.
# ===== Axxon =====

```

(continues on next page)

(continued from previous page)

```
# INSTALLED_APPS.append('ffsecurity_axxon')
# FFSECURITY['AXXON'] = [
#     {
#         'name': 'server_name',
#         'api': 'http://example.com/',
#         'rtsp': 'rtsp://example.com:554/',
#         'user': 'user',
#         'password': 'password',
#     }
# ]
# FFSECURITY_UI_CONFIG['dossier'] = {
#     'video': True,
# }
# ===== Genetec =====
# INSTALLED_APPS.append('ffsecurity_genetec')
# ===== Sova =====
# INSTALLED_APPS.append('ffsecurity_sova')
# ===== CryptoPRO authentication =====
# INSTALLED_APPS.append('ffsecurity_cproauth')
# REST_FRAMEWORK['DEFAULT_AUTHENTICATION_CLASSES'] = [
#     'ffsecurity.auth.TokenAuthentication',
#     'ffsecurity_cproauth.auth.CryptoProOrTokenAuthentication'
# ]
# ===== DossierLists sync =====
# INSTALLED_APPS.append('ffsecurity_sync')
# token must be identical on master and slave
# use pwgen -s 64 1
# SYNC_TOKEN = 'change_me'
# SYNC_TIME = {
#     # 24 hour format
#     'hour': 3,
#     'minute': 0,
# }
```

7. Generate a signature key for the session encryption (used by Django) by executing: `pwgen -snc 50 1|tr '\n' '\0'. Specify this key as SECRET_KEY.`
8. Start the services.

```
sudo systemctl enable findface-security
sudo systemctl start findface-security
```

9. Disable the default nginx server and add the findface-security server to the list of enabled servers. Restart nginx.

```
sudo rm /etc/nginx/sites-enabled/default

sudo ln -s /etc/nginx/sites-available/ffsecurity-nginx.conf /etc/nginx/sites-
→enabled/

sudo nginx -s reload
```

1.4.3 Additional findface-video-worker deployment on remote hosts

To install only the findface-video-worker service, do the following:

Tip: Before deployment, be sure to consult the [system requirements](#).

Tip: If you have several video cards on your server, see [Multiple Video Cards Usage](#) before deploying findface-video-worker-gpu.

1. Download the installer file findface-security-and-server-4.2.1.run.
2. Put the .run file into some directory on the designated host (for example, /home/username).
3. From this directory, make the .run file executable.

```
chmod +x findface-security-and-server-4.2.1.run
```

4. Execute the .run file.

```
sudo ./findface-security-and-server-4.2.1.run
```

The installer will ask you a few questions and perform several automated checks to ensure that the host meets the system requirements. Fill out the prompts appropriately once requested. The questions are the following:

1. Product to install: FindFace Video Worker.
2. Type of findface-video-worker package: CPU or GPU.
3. IP address of the ffsecurity host.

After that, the installation process will automatically begin.

Note: The answers will be saved to a file /tmp/<findface-installer-*>.json. You can edit this file and use it to install FindFace Security on other hosts without having to answer the questions again.

Note: If you chose to install findface-ntls and/or findface-video-manager on different hosts than that with ffsecurity, specify their IP addresses in the findface-video-worker configuration file after the installation.

```
sudo vi /etc/findface-video-worker-cpu.ini
sudo vi /etc/findface-video-worker-gpu.ini
```

In the ntls-addr parameter, specify the findface-ntls host IP address.

```
ntls-addr=127.0.0.1:3133
```

In the mgr-static parameter, specify the findface-video-manager host IP address, which provides findface-video-worker with settings and the video stream list.

```
mgr-static=127.0.0.1:18811
```

Tip: To automatically install findface-video-worker on another host without answering the installation questions, use the /tmp/<findface-installer-*>.json file. Execute:

```
sudo ./findface-security-and-server-4.2.1.run -f /tmp/<findface-installer-*>.json
```

You can find an example of the installation file in *Installation File*.

1.4.4 Neural Network Models Installation

To detect and identify faces and face features (gender, age, emotions, beard, glasses, face mask, and others), `findface-extraction-api` uses neural networks.

If you have to manually initiate the models installation, use the console installer as follows:

1. Execute the prepared `findface-security-and-server-4.2.1.run` file.

```
sudo ./findface-security-and-server-4.2.1.run
```

2. Select the installation type: Fully customized installation.
3. Select a FindFace Security component to install: `findface-data`. To do so, first deselect all the listed components by entering `-*` in the command line, then select the required component by entering its sequence number (keyword): 1. Enter done to save your selection and proceed to another step.
4. In the same manner, select models to install. After that, the installation process will automatically begin.

Note: You can find installed face recognition models at `/usr/share/findface-data/models/face/`, face features recognition models at `/usr/share/findface-data/models/faceattr/`.

```
ls /usr/share/findface-data/models/face/
ifruit_160.cpu.fnk  ifruit_320.cpu.fnk  ifruit_160.gpu.fnk  ifruit_320.gpu.fnk

ls /usr/share/findface-data/models/faceattr/
age.v1.cpu.fnk  age.v1.gpu.fnk  beard.v0.cpu.fnk  beard.v0.gpu.fnk  emotions.v1.cpu.
↪fnk  emotions.v1.gpu.fnk  gender.v2.cpu.fnk  gender.v2.gpu.fnk  glasses3.v0.cpu.fnk
↪glasses3.v0.gpu.fnk, medmask3.v1.cpu.fnk, medmask3.v1.gpu.fnk, liveness.v3.gpu.fnk
```

1.4.5 Fully Customized Installation

The FindFace Security developer-friendly installer provides you with quite a few installation options, including the fully customized installation. This option is mostly used when deploying FindFace Security in a highly distributed environment.

To initiate the fully customized installation, answer the installer questions as follows:

- Product to install: FindFace Security.
- Installation type: Fully customized installation.
- FindFace Security components to install: whenever you have to make a selection, first deselect all the listed components by entering `-*` in the command line, then select required components by entering their sequence number (keyword), for example: 1 7 (`findface-data`, `findface-extraction-api`), 13 (`findface-tarantool-server`), or 9 (`findface-upload`). Enter done to save your selection and proceed to another step.
- Related questions such as about the acceleration type: CPU or GPU.

1.4.6 Guide to Typical Cluster Installation

This section is all about deploying FindFace Security in a cluster environment.

Tip: If after having read this section, you still have questions, do not hesitate to contact our experts by support@ntechlab.com.

The reasons for deploying FindFace Security in a cluster are the following:

- Necessity to distribute the video processing high load.
- Necessity to process video streams from a group of cameras in the place of their physical location.

Note: The most common use cases where such need comes to the fore are hotel chains, chain stores, several security checkpoints in the same building, etc.

See also:

Allocate findface-video-worker to Camera Group

- Necessity to distribute the biometric sample extraction high load.
- Large number of faces to search through, that requires implementation of a distributed face database.

Before you start the deployment, outline your system architecture, depending on its load and allotted resources (see *System Requirements*). The most common distributed scheme is as follows:

- One principal server with the following components: `findface-ntls`, `findface-security`, `findface-sf-api`, `findface-video-manager`, `findface-upload`, `findface-video-worker`, `findface-extraction-api`, `findface-tarantool-server`, and third-parties.
- Several additional video processing servers with installed `findface-video-worker`.
- (If needed) Several additional biometric servers with installed `findface-extraction-api`.
- (If needed) Additional database servers with multiple Tarantool shards.

This section describes the most common distributed deployment. In high load systems, it may also be necessary to distribute the API processing (`findface-sf-api` and `findface-video-manager`) across several additional servers. In this case, refer to *Fully Customized Installation*.

To deploy FindFace Security in a cluster environment, follow the steps below:

- *Deploy Principal Server*
- *Deploy Video Processing Servers*
- *Deploy Biometric Servers*
- *Distribute Load across Biometric Servers*
- *Distribute Database*
- *Configure Network*

Deploy Principal Server

To deploy the principal server as part of a distributed architecture, do the following:

1. On the designated physical server, *install* FindFace Security from installer as follows:
 - Product to install: FindFace Security.
 - Installation type: Single server, multiple video workers. In this case, FindFace Security will be installed and configured to interact with additional remote findface-video-worker instances.
 - Type of the findface-video-worker acceleration (on the principal server): CPU or GPU, subject to your hardware configuration.
 - Type of the findface-extraction-api acceleration (on the principal server): CPU or GPU, subject to your hardware configuration.

After the installation is complete, the following output will be shown on the console:

```
#####  
#                               Installation is complete                               #  
#####  
- upload your license to http://172.20.77.17/#/license/  
- user interface: http://172.20.77.17/  
  superuser:      admin  
  password:       admin  
  documentation:  http://172.20.77.17/doc/
```

2. Upload the FindFace Security license file via the main web interface `http://<Host_IP_address>/#/license`. To access the web interface, use the provided admin credentials.

Note: The host IP address is shown in the links to FindFace web services in the following way: as an external IP address if the host belongs to a network, or 127.0.0.1 otherwise.

Important: Do not disclose the superuser (Super Administrator) credentials to others. To administer the system, create a new user with the administrator privileges. Whatever the role, Super Administrator cannot be deprived of its rights.

3. Allow the licensable services to access the findface-ntls license server from any IP address. To do so, open the `/etc/findface-ntls.cfg` configuration file and set `listen = 0.0.0.0:3133`.

```
sudo vi /etc/findface-ntls.cfg  
  
# Listen address of NTLS server where services will connect to.  
# The format is IP:PORT  
# Use 0.0.0.0:PORT to listen on all interfaces  
# This parameter is mandatory and may occur multiple times  
# if you need to listen on several specific interfaces or ports.  
listen = 0.0.0.1:3133
```

Deploy Video Processing Servers

On an additional video processing server, install only a findface-video-worker instance following the *step-by-step instructions*. Answer the installer questions as follows:

- Product to install: FindFace Video Worker.
- Type of the `findface-video-worker` acceleration: CPU or GPU, subject to your hardware configuration.
- FindFace Security IP address: IP address of the principal server.

After that, the installation process will automatically begin. The answers will be saved to a file `/tmp/<findface-installer-*>.json`. Use this file to install FindFace Video Worker on other hosts without having to answer the questions again, by executing:

```
sudo ./findface-security-and-server-4.2.1.run -f /tmp/<findface-installer-*>.
↪ json
```

Note: If `findface-ntls` and/or `findface-video-manager` are installed on a different host than that with `findface-security`, specify their IP addresses in the `findface-video-worker` configuration file after the installation.

```
sudo vi /etc/findface-video-worker-cpu.ini
sudo vi /etc/findface-video-worker-gpu.ini
```

In the `ntls-addr` parameter, specify the `findface-ntls` host IP address.

```
ntls-addr=127.0.0.1:3133
```

In the `mgr-static` parameter, specify the `findface-video-manager` host IP address, which provides `findface-video-worker` with settings and the video stream list.

```
mgr-static=127.0.0.1:18811
```

Deploy Biometric Servers

On an additional biometric server, install only a `findface-extraction-api` instance from the console installer. Answer the installer questions as follows:

- Product to install: FindFace Security.
- Installation type: Fully customized installation.
- FindFace Security components to install: `findface-extraction-api` and `findface-data`. To make a selection, first deselect all the listed components by entering `-*` in the command line, then select `findface-extraction-api` and `findface-data` by entering their sequence number (keyword): 1 7. Enter `done` to save your selection and proceed to another step.
- Type of `findface-extraction-api` acceleration: CPU or GPU.
- Modification of the `findface-extraction-api` configuration file: specify the IP address of the `findface-ntls` server.
- Neural network models to install: CPU or GPU model for face biometrics (mandatory), and (optional) CPU/GPU models for gender, age, emotions, glasses, beard, and face mask recognition. To make a selection, first deselect all the listed models by entering `-*` in the command line, then select required models by entering their sequence number (keyword), for example, 8 2 to select the GPU-models for biometric sample extraction and age recognition. Enter `done` to save your selection and proceed to another step. Be sure to choose the right acceleration type for each model, matching the acceleration type of `findface-extraction-api`: CPU or GPU. Be aware that `findface-extraction-api` on CPU can work only with CPU-models, while `findface-extraction-api` on GPU supports both CPU- and GPU-models. See [Face Features Recognition](#) for details.

The following models are available:

Face feature	Acceleration	Package
face (biometry)	CPU	findface-data-ifruit-320-cpu_3.0.0_all.deb findface-data-ifruit-160-cpu_3.0.0_all.deb
	GPU	findface-data-ifruit-320-gpu_3.0.0_all.deb findface-data-ifruit-160-gpu_3.0.0_all.deb
age	CPU	findface-data-age.v1-cpu_3.0.0_all.deb
	GPU	findface-data-age.v1-gpu_3.0.0_all.deb
gender	CPU	findface-data-gender.v2-cpu_3.0.0_all.deb
	GPU	findface-data-gender.v2-gpu_3.0.0_all.deb
emotions	CPU	findface-data-emotions.v1-cpu_3.0.0_all.deb
	GPU	findface-data-emotions.v1-gpu_3.0.0_all.deb
glasses3	CPU	findface-data-glasses3.v0-cpu_3.0.0_all.deb
	GPU	findface-data-glasses3.v0-gpu_3.0.0_all.deb
beard	CPU	findface-data-beard.v0-cpu_3.0.0_all.deb
	GPU	findface-data-beard.v0-gpu_3.0.0_all.deb
face mask	CPU	findface-data-medmask3.v1-cpu_3.0.0_all.deb
	GPU	findface-data-medmask3.v1-gpu_3.0.0_all.deb

After that, the installation process will automatically begin. The answers will be saved to a file `/tmp/<findface-installer-*>.json`. Use this file to install `findface-extraction-api` on other hosts without having to answer the questions again.

```
sudo ./findface-security-and-server-4.2.1.run -f /tmp/<findface-installer-*>.
↪ json
```

After all the biometric servers are deployed, distribute load across them by using a *load balancer*.

Distribute Load across Biometric Servers

To distribute load across several biometric servers, you need to set up load balancing. The following step-by-step instructions demonstrate how to set up `nginx` load balancing in a round-robin fashion for 3 `findface-extraction-api` instances located on different physical hosts: one on the FindFace Security principal server (172.168.1.9), and 2 on additional remote servers (172.168.1.10, 172.168.1.11). Should you have more biometric servers in your system, load-balance them by analogy.

Tip: You can use any load balancer according to your preference. Please refer to the relevant official documentation for guidance.

To set up load balancing, do the following:

1. Designate the FindFace Security principal server (recommended) or any other server with `nginx` as a gateway to all the biometric servers.

Important: You will have to specify the gateway server IP address when configuring the FindFace Security *network*.

Tip: You can install `nginx` as such:

```
sudo apt update
sudo apt install nginx
```

2. On the gateway server, create a new nginx configuration file.

```
sudo vi /etc/nginx/sites-available/extapi
```

3. Insert the following entry into the newly created configuration file. In the upstream directive (upstream extapibackends), substitute the exemplary IP addresses with the actual IP addresses of the biometric servers. In the server directive, specify the gateway server listening port as listen. You will have to enter this port when configuring the FindFace Security *network*.

```
upstream extapibackends {
    server 172.168.1.9:18666; ## ``findface-extraction-api`` on principal_
    ↪server
    server 172.168.1.10:18666; ## 1st additional extraction server
    server 127.168.1.11:18666; ## 2nd additional extraction server
}
server {
    listen 18667;
    server_name extapi;
    client_max_body_size 64m;
    location / {
        proxy_pass http://extapibackends;
        proxy_next_upstream error;
    }
    access_log /var/log/nginx/extapi.access_log;
    error_log /var/log/nginx/extapi.error_log;
}
```

4. Enable the load balancer in nginx.

```
sudo ln -s /etc/nginx/sites-available/extapi /etc/nginx/sites-enabled/
```

5. Restart nginx.

```
sudo service nginx restart
```

6. On the principal server and each additional biometric server, open the `/etc/findface-extraction-api.ini` configuration file. Substitute `localhost` in the `listen` parameter with the relevant server address that you have specified in upstream extapibackends (`/etc/nginx/sites-available/extapi`) before. In our example, the address of the 1st additional extraction server has to be substituted as such:

```
sudo vi /etc/findface-extraction-api.ini

listen: 172.168.1.10:18666
```

7. Restart the `findface-extraction-api` on the principal server and each additional biometric server.

```
sudo systemctl restart findface-extraction-api.service
```

The load balancing is now successfully set up. Be sure to specify the actual gateway server IP address and listening port, when configuring the FindFace Security *network*.

Distribute Database

The `findface-tarantool-server` component connects the Tarantool database and the `findface-sf-api` component, transferring search results from the database to `findface-sf-api` for further processing. To increase search speed, multiple `findface-tarantool-server` shards can be created on each Tarantool host. Their running concurrently leads to a remarkable increase in performance. Each shard can handle up to approximately 10,000,000 faces. When deploying `findface-tarantool-server` from installer, shards are created automatically given the server hardware.

To distribute the face database, install only a `findface-tarantool-server` instance on each additional database server. Answer the installer questions as follows:

- Product to install: FindFace Security.
- Installation type: Fully customized installation.
- FindFace Security components to install: `findface-tarantool-server`. To make a selection, first deselect all the listed components by entering `-*` in the command line, then select `findface-tarantool-server` by entering its sequence number (keyword): 13. Enter `done` to save your selection and proceed to another step.

After that, the installation process will automatically begin. The answers will be saved to a file `/tmp/<findface-installer-*>.json`. Use this file to install `findface-tarantool-server` on other hosts without having to answer the questions again.

```
sudo ./findface-security-and-server-4.2.1.run -f /tmp/<findface-installer-*>.json
```

As a result of the installation, `findface-tarantool-server` shards will be automatically installed in the amount of $N = \max(\min(\text{mem_mb} // 2000, \text{cpu_cores}), 1)$, i.e. equal to the RAM size in MB divided by 2000, or the number of CPU physical cores (but at least 1 shard).

Be sure to specify the shards IP addresses and ports, when configuring the FindFace Security *network*. To learn the port numbers, execute on each database server:

```
sudo cat /etc/tarantool/instances.enabled/*shard* | grep -E ".start|(listen =)"`
```

You will get the following result:

```
listen = '127.0.0.1:33001',
FindFace.start("127.0.0.1", 8101, {
  listen = '127.0.0.1:33002',
FindFace.start("127.0.0.1", 8102, {
```

You can find the port number of a shard in the `FindFace.start` section, for example, 8101, 8102, etc.

Configure Network

After all the FindFace Security components are deployed, configure their interaction over the network. Do the following:

1. Open the `/etc/findface-sf-api.ini` configuration file:

```
sudo vi /etc/findface-sf-api.ini
```

Specify the following parameters:

Parameter	Description
extraction-api -> extraction-api	IP address and listening port of the <i>gateway biometric server</i> with set up load balancing.
storage-api -> shards -> master	IP address and port of the findface-tarantool-server master shard. Specify each shard by analogy.
upload_url	WebDAV NginX path to send original images, thumbnails and normalized face images to the findface-upload service.

```
...
extraction-api:
  extraction-api: http://172.168.1.9:18667

...
webdav:
  upload-url: http://127.0.0.1:3333/uploads/

...
storage-api:
  ...
  shards:
    - master: http://172.168.1.9:8101/v2/
      slave: ''
    - master: http://172.168.1.9:8102/v2/
      slave: ''
    - master: http://172.168.1.12:8101/v2/
      slave: ''
    - master: http://172.168.1.12:8102/v2/
      slave: ''
    - master: http://172.168.1.13:8102/v2/
      slave: ''
    - master: http://172.168.1.13:8102/v2/
      slave: ''
```

2. Open the /etc/ffsecurity/config.py configuration file.

```
sudo vi /etc/ffsecurity/config.py
```

Specify the following parameters:

Parameter	Description
SERVICE_EXTERNAL_ADDRESS	FindFace Security IP address or URL prioritized for the Genetec integration and webhooks. Once this parameter not specified, the system uses EXTERNAL_ADDRESS for these purposes. To use Genetec and webhooks, be sure to specify at least one of those parameters: SERVICE_EXTERNAL_ADDRESS, EXTERNAL_ADDRESS.
EXTERNAL_ADDRESS	(Optional) IP address or URL that can be used to access the FindFace Security web interface. Once this parameter not specified, the system auto-detects it as the external IP address. To access FindFace Security, you can use both the auto-detected and specified IP addresses.
VIDEO_DETECT_TOKEN	To authorize the video face detection module, come up with a token and specify it here.
VIDEO_MANAGER_IP	IP address of the findface-video-manager host.
NTLS_HTTP_IP	IP address of the findface-ntls host.
ROUTER_URL	External IP address of the findface-security host that will receive detected faces from the findface-video-worker instance(s).
SF_API_ADDRESS	IP address of the findface-sf-api host.
EXTRACTION_API	IP address and listening port of the <i>gateway biometric server</i> with set up load balancing.

```
sudo vi /etc/ffsecurity/config.py

...
# SERVICE_EXTERNAL_ADDRESS prioritized for webhooks and genetec
SERVICE_EXTERNAL_ADDRESS = 'http://localhost'
EXTERNAL_ADDRESS = 'http://127.0.0.1'

...
FFSECURITY = {
    'VIDEO_DETECTOR_TOKEN': '7ce2679adfc4d74edcf508bea4d67208',
    ...
    'EXTRACTION_API': 'http://172.168.1.9:18667/',
    'VIDEO_MANAGER_ADDRESS': 'http://127.0.0.1:18810',
    ...
    'NTLS_HTTP_URL': 'http://127.0.0.1:3185',
    'ROUTER_URL': 'http://172.168.1.9',
    ...
    'SF_API_ADDRESS': 'http://127.0.0.1:18411',
    ...
}
```

The FindFace Security components interaction is now set up.

1.5 First Steps after Deployment

Once FindFace Security is successfully deployed, it is time to open the *web interface* and get started. In this chapter, you can find a recommended sequence of steps that will help you harness the entire functionality of your system.

In this chapter:

- *Organize Cameras*
- *Organize Watch Lists and Dossiers*
- *Create Users and Grant them Privileges*
- *Start Monitoring Faces*
- *Organize Video Surveillance*
- *Start Collecting Statistics*
- *FindFace Security in Action*
- *Basic Maintenance*
- *Go Further*

1.5.1 Organize Cameras

1. *Create a new camera group* or use the default one. A camera group is an entity that allows you to group cameras subject to their physical location. For example, cameras at the same entrance to a building can be combined into one camera group.

2. *Add cameras* to the camera group and *check their statuses*.

You may also need:

1. Configure your system to process video from the group of cameras at their physical location. It may come in handy in a distributed architecture. [Learn more](#).
2. Consider enabling event deduplication if observation scenes of cameras within the group overlap. This feature allows you to exclude coinciding facial recognition events among cameras belonging to the same group. [Learn more](#).

1.5.2 Organize Watch Lists and Dossiers

1. *Create a new watch list* or use the default one. A watch list is an entity that allows you to classify people by arbitrary criteria: blacklist, wanted, VIP, staff, etc.
2. Upload dossiers and add them in the watch list either *manually, in bulk via the web interface*, or use the *console bulk upload* function.

You may also need:

1. *Distribute dossier database* among several hosts. The dossier database will be available for editing on the master server and reading and monitoring on the slaves.
2. *Customize dossier content*. Create additional fields, tabs, and search filters.

1.5.3 Create Users and Grant them Privileges

1. Check out the list of *predefined user roles* and *create new roles* if necessary.
2. *Add users* to the system and grant them privileges.

1.5.4 Start Monitoring Faces

By default, FindFace Security is monitoring only *unmatched faces*. To enable a custom watch list monitoring, simply make this list *active*. You can also turn on sound notifications and request manual acknowledgment for the events associated with the list.

You may also need:

1. Make events more informative by enabling recognition of gender, age, emotions, beard, face mask, and glasses. [Learn more](#).
2. Protect your system from spoofing by enabling the Face Liveness Detection functionality. [Learn more](#).

1.5.5 Organize Video Surveillance

Create a camera layout for basic video surveillance.

1.5.6 Start Collecting Statistics

Set up *counters* to collect realtime statistics on in-video faces and silhouettes.

1.5.7 FindFace Security in Action

1. *Automatically identify faces in live video* and check them against watch lists. Work with the event history by using various filters.
2. Harness the *episodes*. An episode is a set of identification events that feature faces of the same person, detected within a certain period of time. As events on the *Events* tab show up in an arbitrary order, a large number of miscellaneous events can make the work challenging and unproductive. With the Episodes, the system uses AI to organize incoming events based on the faces similarity and detection time. This allows for the effortless processing of diverse events, even in large numbers.
3. Search for faces in the following databases:
 - Database of detected faces. *Learn more*.
 - Dossier database. *Learn more*.
4. *Search archived videos* for faces under monitoring.
5. Manually *compare two faces* and verify that they belong to the same person.
6. Use the *mobile app*.

You may also need:

Harness the *person recognition*. The system databases will hold a new entity `person` event linked to all *episodes* that feature a person's face. You can work with the person gallery similarly as with events and episodes.

1.5.8 Basic Maintenance

1. *Configure* automatic cleanup of events, episodes, and full frames.
2. Manually *purge* events, episodes, and full frames.
3. Regularly *backup* the database.

1.5.9 Go Further

1. Set up *webhooks* to automatically send notifications about specific events, episodes, and counter records to a given URL. In this case, when such an event occurs, FindFace Security will send an HTTP request to the URL configured for the webhook. You can use webhooks for various purposes, for example, to notify a user about a particular event, invoke required behavior on a target website, solve security tasks such as automated access control, etc. *Learn more*.
2. Harness the FindFace Security functions through *HTTP API*.
3. Check out the list of our *partner integrations*.
4. Harness *plugins* to set your directives that determine how FindFace Security processes detected faces.

See also:

- *Camera Management*

- *Face Monitoring and Dossier Database*
- *User Management*
- *Face Identification in Offline Videos*
- *Face and Silhouette Counters*
- *Advanced Functionality*
- *Maintenance and Troubleshooting*

1.6 Work with FindFace Security

Use the web interface to interact with FindFace Security. To open the web interface, enter its basic address in the address bar of your browser, and log in.

Note: The basic address is set during *deployment*.

Important: To log in for the first time, use the admin account created during *deployment*. To create more users, refer to *User Management*.

The web interface has a highly intuitive and handy design and provides the following functionality:

- *Camera Management*. Group cameras subject to their location. Add and configure a camera.
- *Dossier Database*. Manage dossier classification lists (watch lists). Create dossiers manually and in bulk.
- *User Management*. Manage FindFace Security users and their roles.
- *Offline Video Processing*. Offline video face identification.
- *Face and Silhouette Statistics*. Collect realtime statistics on in-video faces and silhouettes.
- *General Preferences*. Configure the confidence threshold for face verification. Set up automatic cleanup of the event database.
- *Compare faces*. Verify that 2 given faces belong to the same person.
- Operator's Guide. *Real time face identification* in live streams. *Organize Events with Episodes*. *Search for faces* in the event list and dossier database. *Video surveillance*.

1.6.1 Camera Management

To configure video-based biometric identification, add cameras to FindFace Security, grouping them subject to their location.

Note: Privileges to create camera groups and cameras are managed in user's permissions (see *User Management*).

In this chapter:


- *Create Camera Group*
- *Add Camera*
- *Monitor Camera Operation*

Create Camera Group

Tip: A default preconfigured camera group is available in the system.

To create a group of cameras, do the following:

1. Navigate to the *Preferences* tab. Click *Camera Groups*.
2. Click +.

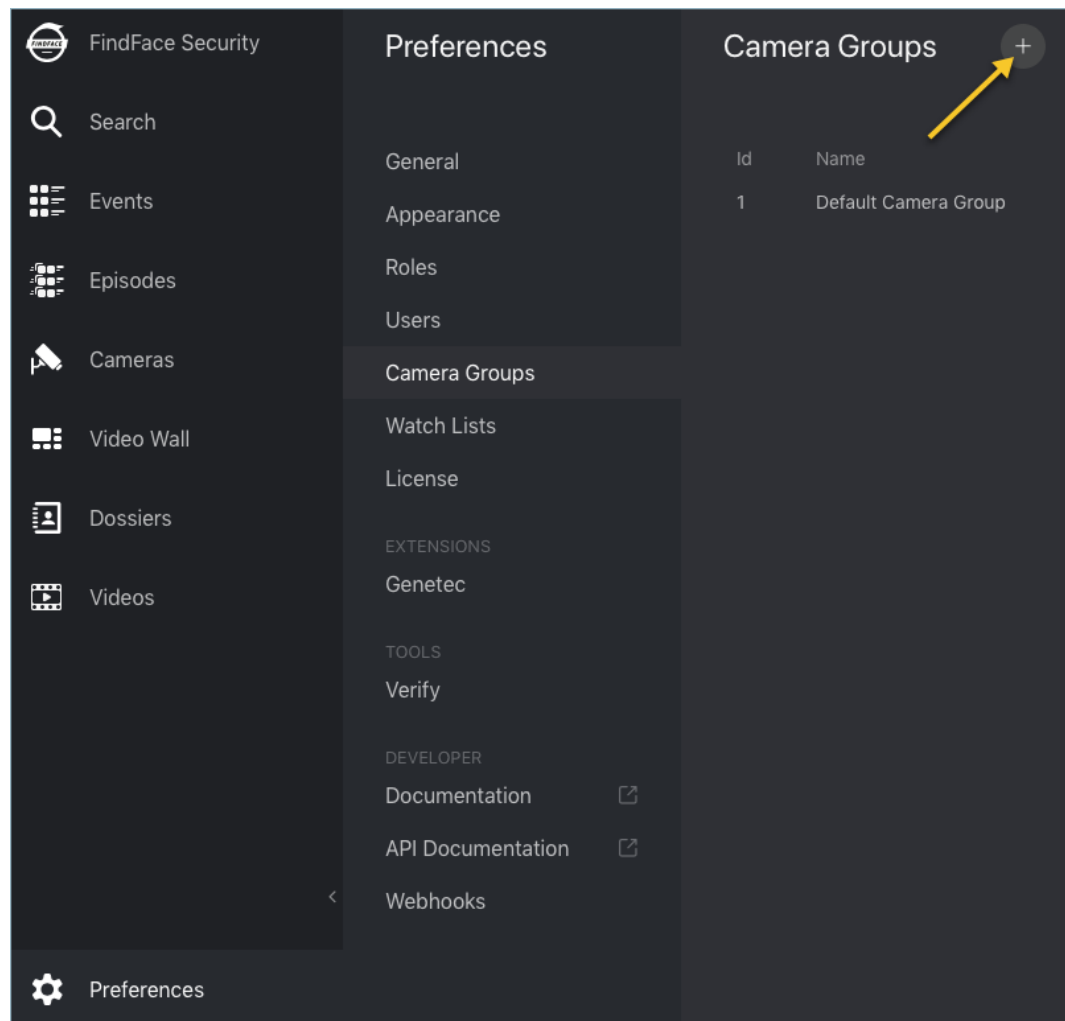

3. On the *Information* tab, specify the group name. Add a comment if needed.

Create Camera Group Information Permissions

* Name
Office

Comment

Labels
Input or select labels

Deduplicate Events
☒

Record only unique events among cameras of the group, excluding overlaps.

* Deduplication Interval
15
Time period in seconds between 2 consecutive checks for event uniqueness.

Confidence Threshold
☒ 0.75

☒ Active

Save Back

- If you want to allocate a certain `findface-video-worker` instance to process video streams from the group, create or select one or several allocation labels.

Note: To complete the allocation, list the labels in the `findface-video-worker` configuration file. See [Allocate `findface-video-worker` to Camera Group](#) for details.


- If you want to deduplicate events from cameras that belong to the same group, i. e. exclude coinciding events, check *Deduplicate Events* and specify the deduplication interval (interval between 2 consecutive checks for event uniqueness).

Warning: Use deduplication with extreme caution. If cameras within a group observe different scenes, some faces may be skipped. See [Deduplicate Events](#) for details.

- By default, all camera groups in the system are applied the *generic confidence threshold*. To set an individual threshold for the camera group, check *Confidence Threshold* and specify the threshold value.

Important: The default generic confidence threshold is optimal for the majority of recognition cases. We do not recommend changing it on your own. Be sure to consult with our technical experts by support@ntechlab.com.

- Check *Active*.
- Click *Save*.
- On the *Permissions* tab, assign privileges on the camera group, specifying which user roles are allowed to change/view the camera group settings.

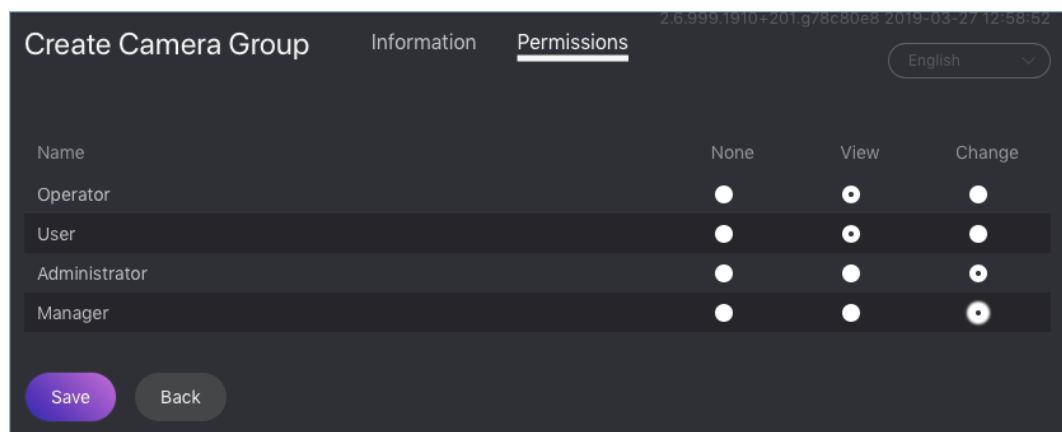


- Click *Save*.

Add Camera

To add a camera, do the following:

- Navigate to the *Cameras* tab.
- Click +.

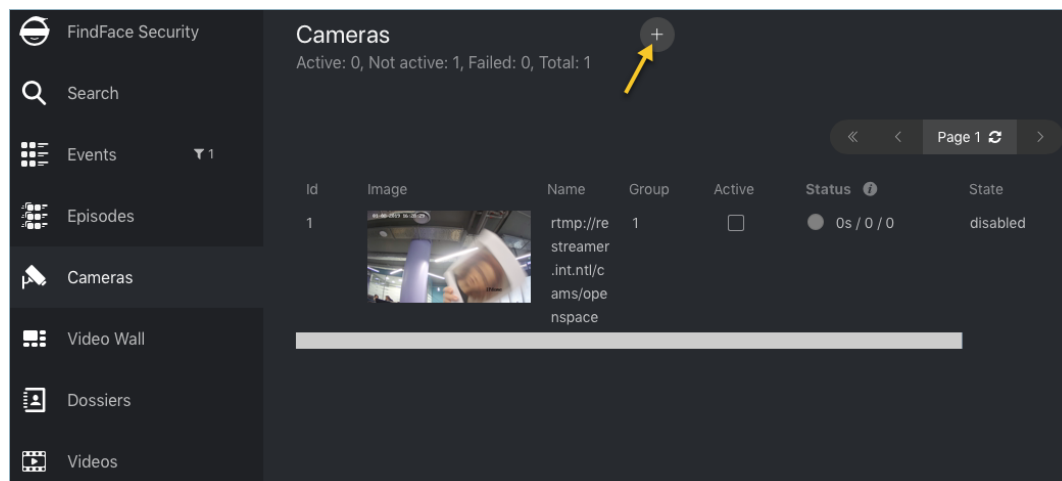

- Specify the name of a camera and add it to a group. If necessary, add a comment.

Add Camera

* Name
Openspace

* Group
Select

* Streaming protocol url
rtmp://restreamer.int.ntl/cams/openspace

Confidence Threshold
☒ 0.78

Comment

☒ Active

Parameters

Reset Parameters

Save Back

4. Specify the camera URL or path to the video file, for example, `file:///data/some.mp4`.
5. By default, all cameras in the system are applied the *generic confidence threshold*. To set an individual threshold for the camera, check *Confidence Threshold* and specify the threshold value.

Important: The default generic confidence threshold is optimal for the majority of recognition cases. We do not recommend changing it on your own. Be sure to consult with our technical experts by support@ntechlab.com.

6. Check *Active*.
7. To configure video processing, click *Parameters* and make adjustments:
 - *Minimum face snapshot quality* (`filter_min_quality`): Minimum quality of a face snapshot to post. To be fitted empirically: negatives values around 0 = high quality faces, -1 = good quality, -2 = satisfactory quality, -5 = inverted faces and large face angles, face recognition may be inefficient.
 - *Minimum face size* (`filter_min_face_size`): Minimum face size in pixels to post. If 0, the filter is off.

- *Maximum face size* (`filter_max_face_size`): Maximum face size in pixels in post.
- *Compression quality* (`jpeg_quality`): Full frame compression quality.
- *FFMPEG options* (`ffmpeg_params`): FFMPEG options for a video stream in the key-value format ["rtsp_transpotr=tcp", "ss=00:20:00"].
- *Offline mode* (`overall_only`): Offline mode. Enable posting one snapshot of the best quality for each face.
- *Time interval* (`realtime_post_interval`): Time interval in seconds (integer or decimal) within which the face tracker picks up the best snapshot in realtime mode.
- *Post best snapshot* (`realtime_post_every_interval`): If true, post the best snapshot obtained within each Time interval (`realtime_post_interval`) in realtime mode. If false, post the best snapshot only if its quality has improved comparing to the previously posted snapshot.
- *Posting timeout* (`router_timeout_ms`): Timeout in milliseconds for posting faces.
- *Retrieve timestamps from stream* (`use_stream_timestamp`): If true, retrieve and post timestamps from a video stream. If false, post the actual date and time.
- *Add to timestamps* (`start_stream_timestamp`): Add the specified number of seconds to timestamps from a stream.
- *Play speed limit* (`play_speed`): If less than zero, the speed is not limited. In other cases, the stream is read with the given `play_speed`. Not applicable for live streams.
- *Region of Tracking* (ROT): Enable detecting and tracking faces only inside a clipping rectangle. Use this option to reduce the video face detector load.
- *Region of Interest* (ROI): Enable posting faces detected only inside a region of interest.

Tip: To specify ROT/ROI, use the visual wizard. First, create a camera without ROT/ROI. Then open it for editing and click *Parameters*. You will see the visual wizard appear.

If necessary, specify optional parameters for video processing. Click *Advanced Parameters*.


- *Force input format* (`ffmpeg_format`): Pass FFMPEG format (mxg, flv, etc.) if it cannot be detected automatically.
- *Verify SSL* (`router_verify_ssl`): If true, enable verification of the server SSL certificate when the face tracker posts faces to the server over https. If false, a self-signed certificate can be accepted.
- *Minimum motion intensity* (`imotion_threshold`): Minimum motion intensity to be detected by the motion detector.

8. Click *Save*.

Note: Each created camera is associated with a so-called job, a video processing task that contains configuration settings and stream data and is assigned to `findface-video-worker`. This task can be restarted (see [Monitor Camera Operation](#)).

Monitor Camera Operation

To monitor the operation of cameras, navigate to the *Cameras* tab.

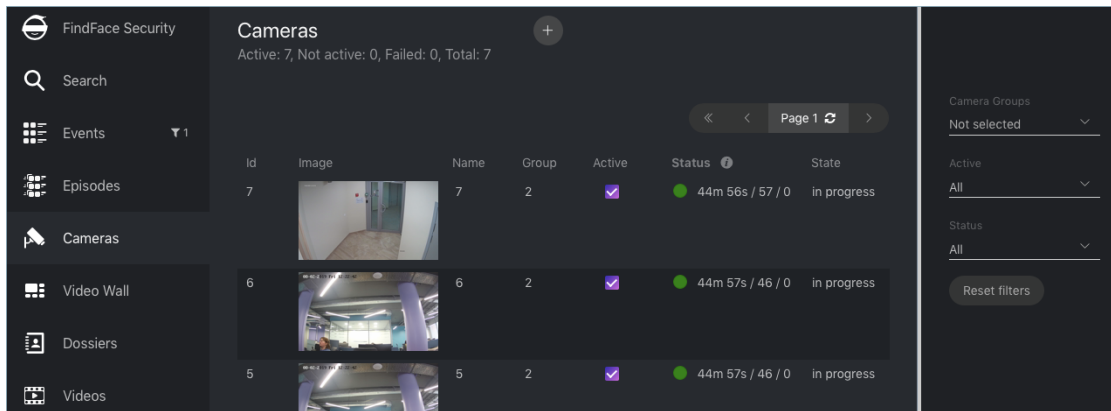


Camera statuses:

- Green: the video stream is being processed without errors.
- Yellow: the video stream is being processed for less than 30 seconds, or one or more errors occurred when posting a face.
- Red: the video stream cannot be processed.
- Grey: camera disabled.

For each camera, you will be provided with the following statistics: current session duration/ the number of successfully posted faces/ the number of faces processed with errors after the last job restart.

Note: Each created camera is associated with a so called job, a video processing task that contains configuration settings and stream data and is assigned to `findface-video-worker`. This task can be restarted.



To restart a job, click  in the *Action* column. In this case, the number of errors will be reset to 0.

With a large number of cameras in the system, use the following filters:

- *Camera groups*,
- *Active*,
- *Status*.

See also:

- *Allocate findface-video-worker to Camera Group*
- *Deduplicate Events*

1.6.2 Face Monitoring and Dossier Database

This chapter is all about monitoring detected faces and creating the dossier database. Each dossier has to contain one or several photos of a person and belong to a certain classification list (watch list), black or white in the simplest case. You can create several watch lists, subject to a person status or hazard level.

Tip: To create dossiers in bulk, use the *batch photo upload* functionality.

In this section:

- *Monitoring Unmatched Faces*
- *Create Watch List*
- *Create Dossier Manually*
- *Batch Photo Upload*
- *Filter Dossiers by Watch List*
- *Purge Dossier Database*

Monitoring Unmatched Faces

FindFace Security features one pre-configured watch list that is used for monitoring only unmatched faces. This watch list cannot be removed from the system. To edit its settings or deactivate it, navigate to the *Preferences* tab. Click *Watch Lists* and then click *Unmatched* in the table.

Note: To view only unmatched faces in the event list, select *Unmatched* in the *Watch lists* filter on the *Events* tab (refer to *Real-time Face Identification Events* for details).


Create Watch List

To create a custom watch list, do the following:

Tip: Besides the *Unmatched* watch list, there is also a default preconfigured watch list to monitor matched faces. This watch list cannot be removed from the system.

1. Navigate to the *Preferences* tab. Click *Watch Lists*.

2. Click +.

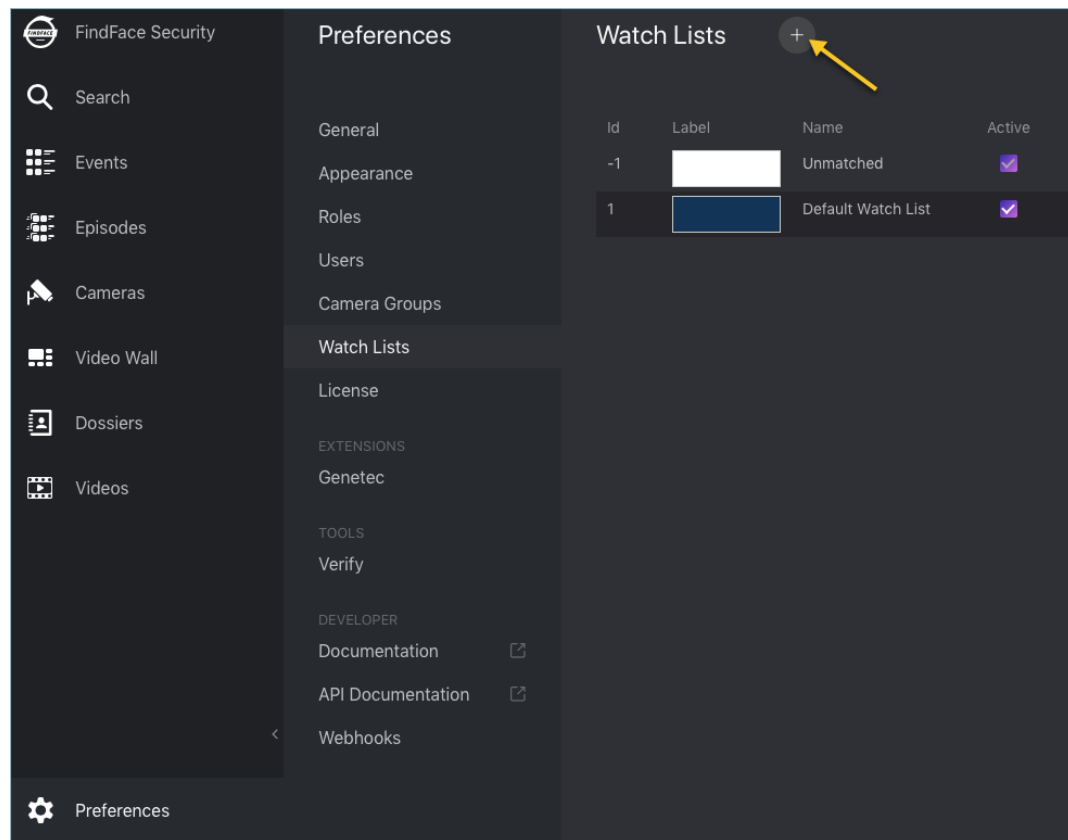

3. From the *Label* palette, select a color which will be shown in notifications for this list. Keep in mind that the right color makes for quicker response of security and hospitality managers.

4. Specify the watch list name. Add a comment if needed.
5. Select a camera group(s) which will be used to monitor the watch list. If no groups specified, the watch list will be monitored by all active cameras in the system.
6. Check *Require acknowledgment* if it is mandatory that events associated with the list be manually acknowledged.
7. Check *Enable sound alert* to turn on sound notifications for the list if needed.
8. By default, all watch lists in the system are applied the *generic confidence threshold*. To set an individual threshold for the watch list, check *Confidence Threshold* and specify the threshold value.

Important: The default generic confidence threshold is optimal for the majority of recognition cases. We do not

recommend changing it on your own. Be sure to consult with our technical experts by support@ntechlab.com.

9. Check *Active*.
10. Click *Save*.
11. On the *Permissions* tab, assign privileges on the watch list, specifying which user roles are allowed to change/view the watch list settings.

Name	None	View	Change
Operator	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
User	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Administrator	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Manager	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>

Save Back

12. Click *Save*.

Create Dossier Manually




To create a dossier manually, do the following:

1. Navigate to the *Dossiers* tab.
2. Click +.



Create dossier

Do you have many dossiers? Try Batch Dossier Upload

Photos



Files


 S.docx, 731.48KB



* Name

Lara Croft

Comment

* Watch Lists

Default Watch List 

☒ Active

Save

Back



3. Attach a photo, related documents, and specify the name of a person. If necessary, add a comment.

Important: A face in the photo must be of high quality, i.e. close to a frontal position. Distance between pupils: 60 px. Supported formats: WEBP, JPG, BMP, PNG. Photos that do not meet the requirements will be rejected with a detailed error description.

Create dossier

Do you have many dossiers? Try [Batch Dossier Upload](#)

Photos




* Name

Lara Croft

Comment

* Watch Lists

Select 

PersonID

First Name

Last Name

Version

☒ Active

SaveBack

4. From the *Watch lists* drop-down menu, select a classification list (or several lists, one by one) for the dossier.
5. Check *Active*. If a dossier is inactive, it is excluded from the real time face identification.
6. Click *Save*. If a similar dossier already exists in the database, you will be able to merge it with the new one, create the new dossier anyway, or cancel creation.


Batch Photo Upload

To create dossiers in bulk, use the batch photo upload. Do the following:

Tip: If you need to upload a large number of photos (more than 10,000), use [Console Bulk Photo Upload](#).


Important: Faces in photos must be of high quality, i.e. close to a frontal position. Distance between pupils: 60 px. Supported formats: WEBP, JPG, BMP, PNG. Photos that do not meet the requirements will be rejected with a detailed error description.

1. Navigate to the *Dossiers* tab.
2. Click +.

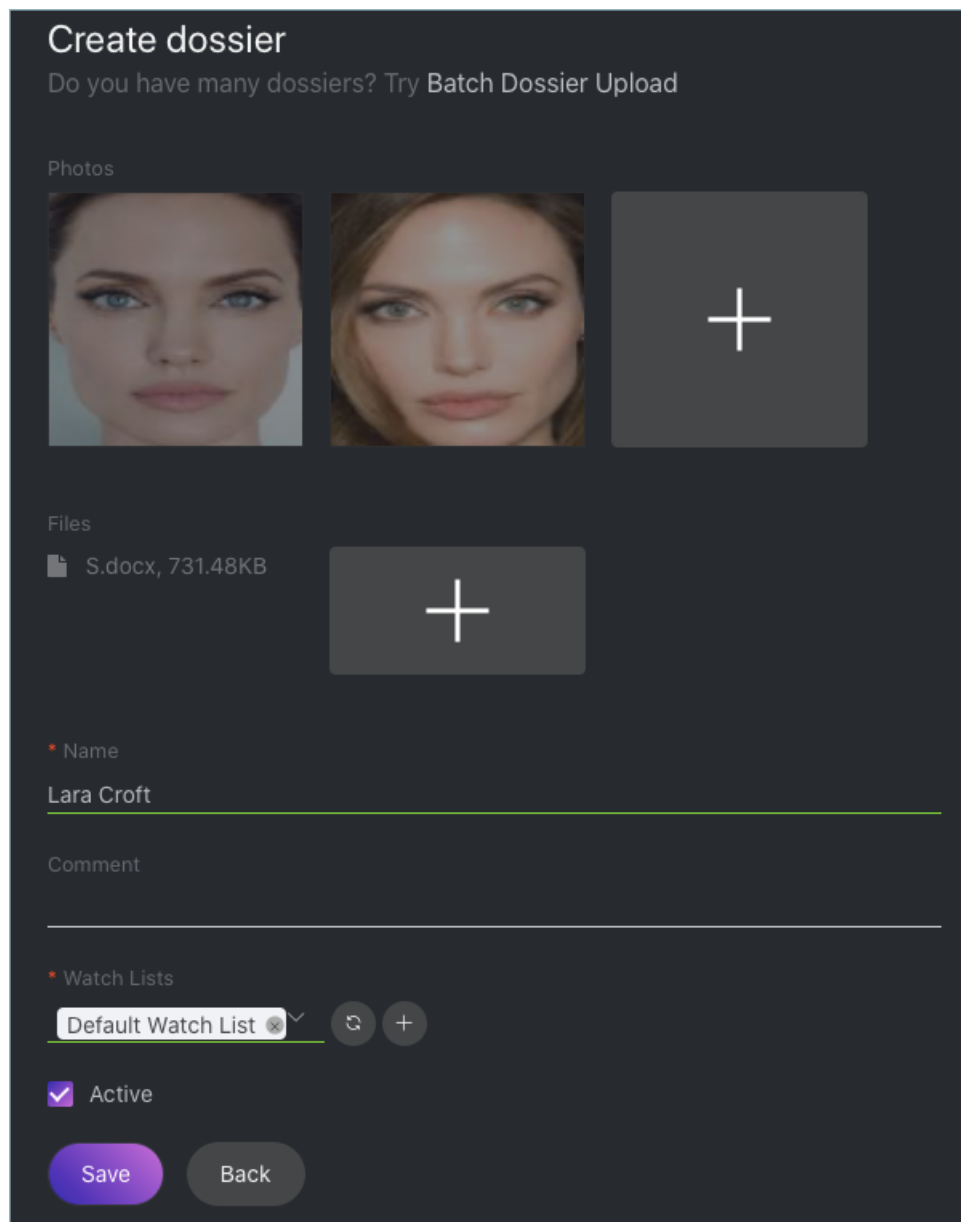

The screenshot shows the 'Create dossier' interface. At the top, it says 'Create dossier' and 'Do you have many dossiers? Try Batch Dossier Upload'. Below this, there are two sections: 'Photos' and 'Files'. The 'Photos' section shows two photo thumbnails and a large grey square with a white plus sign for uploading more photos. The 'Files' section shows a file named 'S.docx, 731.48KB' and a large grey square with a white plus sign for uploading more files. Below these sections are form fields for 'Name' (containing 'Lara Croft'), 'Comment', and 'Watch Lists' (a dropdown menu set to 'Default Watch List' with a plus icon to its right). There is also a checkbox labeled 'Active' which is checked. At the bottom, there are two buttons: 'Save' (purple) and 'Back' (grey).

3. Click *Batch Dossier Upload*.

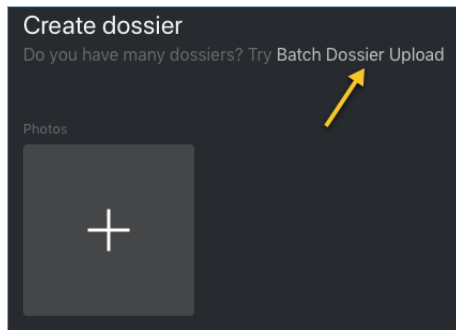

4. Select multiple image files, or a folder.

5. You can use image file names as a basis for names and/or comments in dossiers to be created. Select the necessary option(s). Then configure the automatic name/comment generation rule by appending a custom prefix and/or postfix to the file name.

Tip: To avoid merging the 3 words into one, use underscore or another symbol in the prefix and postfix.

6. From the *Watch lists* drop-down menu, select a classification list for the dossiers.
7. Use the *Parallel Upload* option to specify the number of photo upload streams. The more streams you use, the faster it takes to complete the upload, however it requires more resources as well.
8. From the *Group Photo* drop-down menu, select the system behavior upon detecting several faces in a photo: reject the photo, or upload the biggest face.
9. Click *Start* to launch the photo upload.

Important: To view the batch photo upload log, click *Logs*. You can then download the log in the `.csv` format if needed.

Batch Upload Logs

Back Delete


« < Page 1 ↻ > »

<input type="checkbox"/>	Id	Name	Created	Success count	Failed count	Download csv
<input type="checkbox"/>	1	admin-1552989643143000101	2019-03-19 18:00:43	104	12	Download

« < Page 1 ↻ > »


Filter Dossiers by Watch List

You can find all dossiers created in FindFace Security on the *Dossiers* tab. Use the *Watch lists* filter to filter dossiers by list.

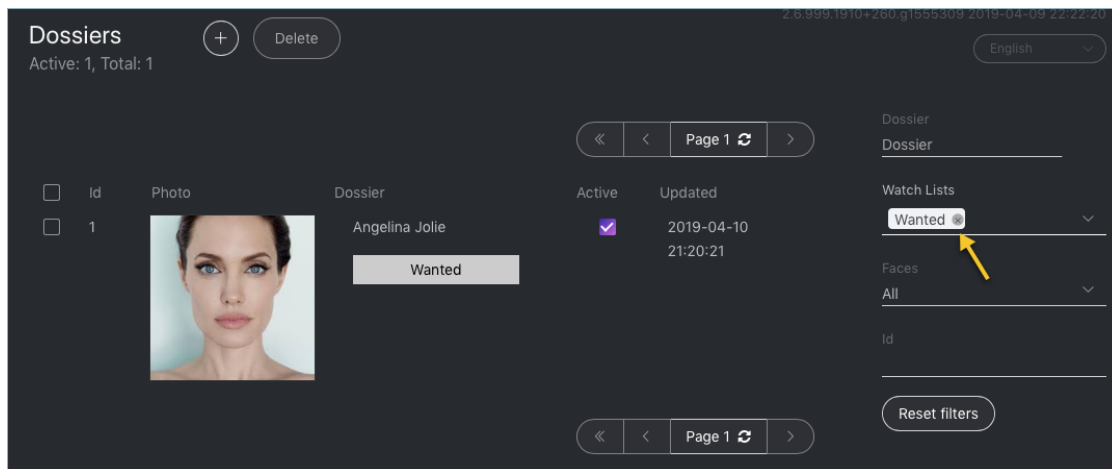

Purge Dossier Database

You can purge the entire dossier database in one click. To do so, navigate to the *Preferences* tab. Click *Watch Lists*. Click *Delete All*.

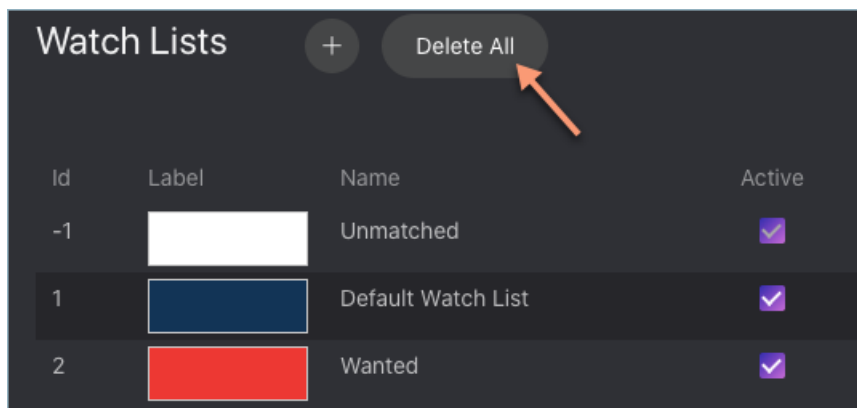

1.6.3 User Management

In this chapter:

- *Predefined Roles*
- *Create Custom Role*
- *Primary and Additional User Privileges*
- *Create User*
- *Deactivate or Delete User*

Predefined Roles

FindFace Security provides the following predefined roles:

- Administrator has rights to *manage cameras*, events, FindFace Security users, the *dossier database*, and full access to all other functions.

Important: Whatever the role, the first administrator (Super Administrator) cannot be deprived of its rights.


- Operator can *create dossiers manually*, receive and acknowledge events, and search for faces on the event list. The other data is available read-only. The *batch dossier creation* is unavailable.
- User has a right to receive and acknowledge events, and to search for faces on the event list. The other data is available read-only.

You can change the predefined roles privileges, as well as create various custom roles.

Create Custom Role

To create a custom role, do the following:

1. Navigate to the *Preferences* tab. Click *Roles*.
2. Click +.

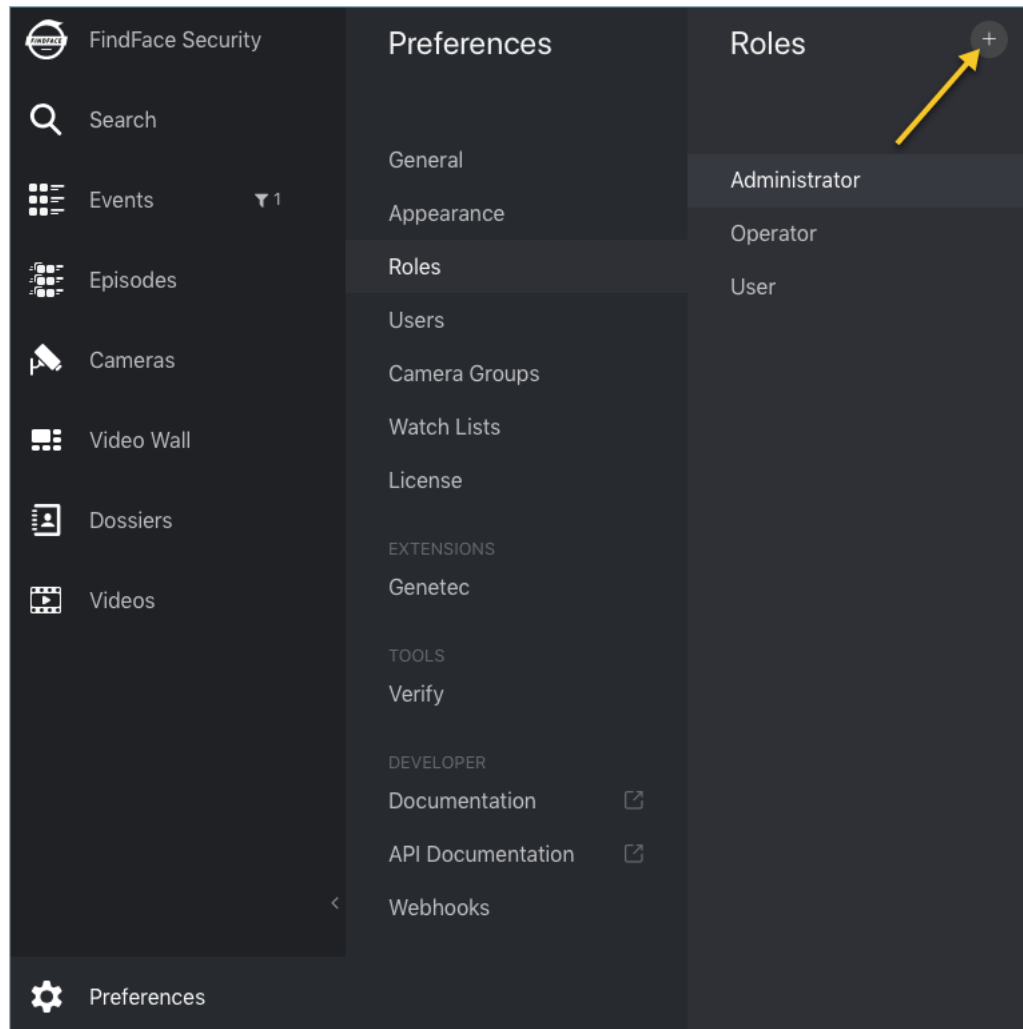

3. On the *Information* tab, specify the role name.

The screenshot shows the 'Information' tab of the role configuration interface. At the top right, there is a language dropdown menu set to 'English'. Below this, the label 'Name' is followed by a text input field containing the word 'Manager'. At the bottom left of the form is a purple 'Save' button. In the top right corner of the form area, there is a small text string: '2.0:999.1910+222.g29b1743 2019-04-04 01:00:10'.

4. Click *Save*. You will see additional tabs appear next to the *Information* tab. You can use these tabs to assign the role privileges for specific watch lists (the *Watch Lists* tab) and camera groups (*Camera Groups*), as well as for entire system functions and entities (*Permissions*).

Note: For example, if you set `None` for a certain camera group on the *Camera Groups* tab, users with this role won't be able to work with **this** very group of cameras. Setting `None` for `cameragroup` on the *Permissions* tab will prevent users from viewing and working with **all** camera groups.

Note: The right for an event consists of the rights for a corresponding camera and watch list. To see unmatched events, you only need the rights for a camera.

The full list of the FindFace Security entities is as follows:

- `dossierlist`: *watch list*
- `dossier`: *dossier*
- `dossierface`: *photo in a dossier*
- `cameragroup`: *camera group*
- `camera`: *camera*
- `listevent`: *event list*
- `eventepisode`: *episodes*
- `uploadlist`: list of photos in *batch upload*
- `upload`: item (photo) in batch photo upload
- `user`: *user*
- `webhook`: *webhook*
- `videosource`: *face identification in offline video*
- `counter`: *counters picking statistics on faces and silhouettes*
- `person`: *person gallery*

You can also enable and disable rights for the following functionality:

- `configure_sova`: configuration of Sova integration
- `configure_genetec`: configuration of *Genetec integration*
- `configure_ntls`: configuration of the `findface-ntls` *license server*
- `batchupload_dossier`: *batch photo upload*
- `view_runtime-setting`: viewing the FindFace Security *general preferences*
- `change_runtime-setting`: changing the FindFace Security general preferences

Information	Watch Lists	Camera Groups	Permissions		
Name	View	Change	Add	Delete	
dossierlist	✓	✓	✓	✓	
dossier	✓	✓	✓	✓	
dossierface	✓	✓	✓	✓	
cameragroup	✓	✓	✓	✓	
camera	✓	✓	✓	✓	
listevent	✓	✓	✓	✓	
eventepisode	✓	✓	✓	✓	
uploadlist	✓	✓	✓	✓	
upload	✓	✓	✓	✓	
user	✓	✓	✓	✓	
webhook	✓	✓	✓	✓	
videosource	✓	✓	✓	✓	
counter	✓	✓	✓	✓	
person	✓	✓	✓	✓	
					Active
configure_sova					✓
configure_genetec					✓
configure_ntls					✓
batchupload_dossier					✓
view_runtime-setting					✓
change_runtime-setting					✓

Primary and Additional User Privileges

You assign privileges to a user by using roles:

- *Primary role*: main user role, mandatory for assignment. You can assign only one primary role to a user.
- *Role*: additional user role, optional for assignment. You can assign several roles to one user. The rights associated with the additional roles will be added to the primary privileges.

All users belonging to a particular primary role automatically get access to camera groups (and cameras within the group) and watch lists (and dossiers assigned to the watchlist) created by a user with the same primary role, subject to the privileges defined by their additional role(s).


See also:

Create User

Create User

To create a user, do the following:

1. Navigate to the *Preferences* tab. Click *Users*.
2. Click +.

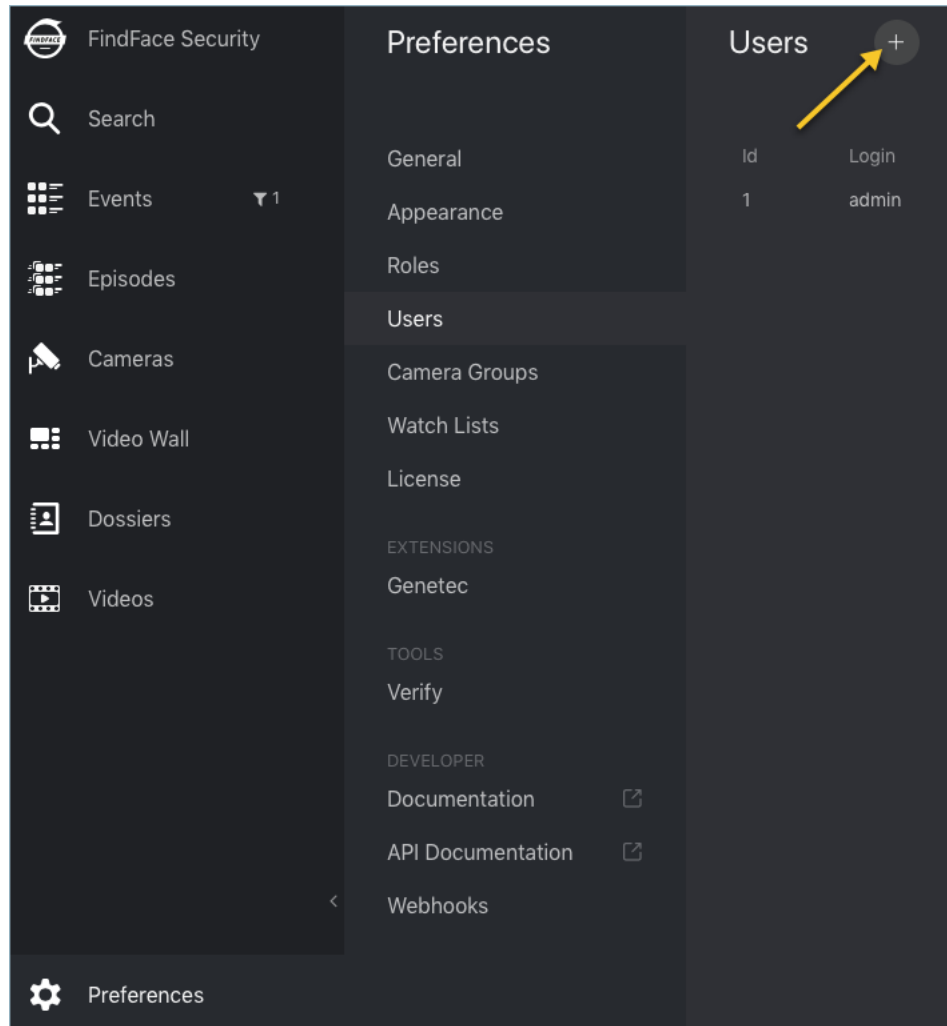

3. Specify such user data as name, login and password. If necessary, add a comment.
4. From the *Roles* drop-down menu, select one or several user roles. Set one of them as the *Primary role*.

Create user

* Name
Eddie

* Login
Engels

* Password
.....

* Confirm password
.....

Roles	Primary role	
Administrator	<input checked="" type="radio"/>	×
Operator	<input type="radio"/>	×

Add role ▼

Comment

Active
☒

Create Back

3.1

5. Check *Active*.

6. Click *Create*.

Deactivate or Delete User

In order to deactivate a user, simply uncheck *Active* on the user list (*Preferences -> Users*).


To delete a user from FindFace Security, click on the user login on the list. Click *Delete*.

1.6.4 Face Identification in Offline Videos

Besides real-time face identification, FindFace Security allows for offline video processing. This functionality has a wide range of possible applications, among which the most common case is face detection and recognition in archived videos.

To identify faces in an offline video, do the following:

1. Create a *camera group* with basic settings.
2. Assign this camera group to all *watch lists* that you want to monitor when processing the video.
3. Create a video in FindFace Security by uploading it from a file or online storage/cloud. To do so, navigate to the *Videos* tab.
4. Click +.

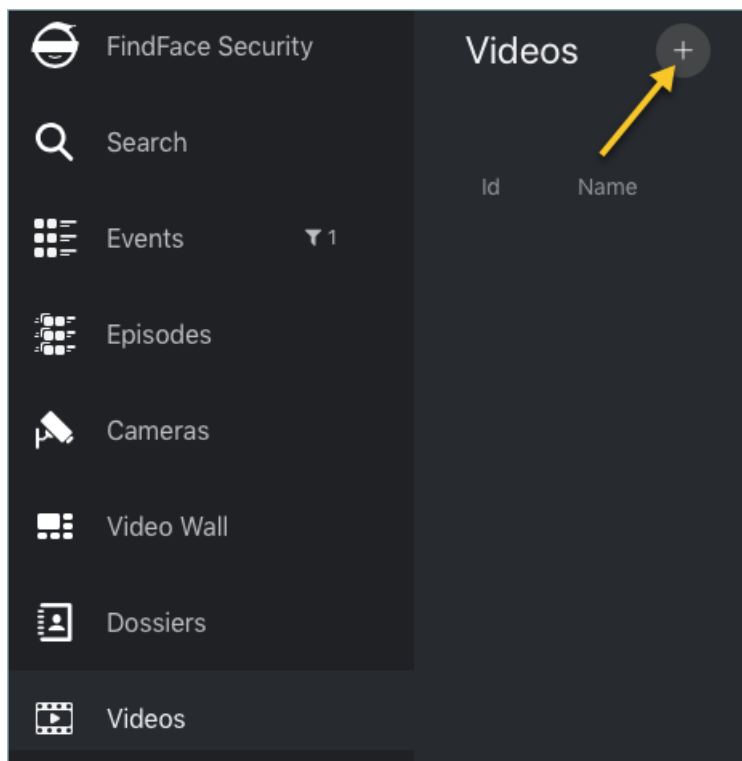

5. Specify the video name.

Create Video

Name
Entrance 05.15.2019

File or Url
Url or entrance.05.15.2019.flv **Select file**

• Camera group
Forensic

Camera
openspace

Parameters

Reset Parameters **Save**

6. Specify the video URL in an online storage, or select a video file.
7. Select the camera group that you have just created.
8. (Optional) Select a camera to which you want to attribute the face recognition events found in the video.
9. (Optional) Specify parameters of video processing in the same manner as you do when configuring a *camera*.
10. Click *Save* to upload the video.

11. Once the video uploaded, click *Process* to start face identification. To view face identification events, navigate to the *Events* tab and filter the list of events by the camera group associated with the video.

1.6.5 Face and Silhouette Counters

Important: To be able to count human silhouettes, you first have to enable *silhouette detection*.

FindFace Security allows you to count faces and silhouettes on connected cameras. This functionality can apply to a wide range of situations, such as people counting in queues and waiting areas, monitoring public gatherings, crowding prevention, and more.

The counting method is based on time slices, which means that the system counts faces and silhouettes in static screenshots taken with a given `count interval`. The counter shows how the number of faces and silhouettes changes over time.

In this section:

- *Configure Counters*
- *Create Counter*
- *Counter Chart*
- *Work with Counter Records*
- *Set Webhook for Counter*

Configure Counters

To configure counters, open the `findface-security` configuration file and modify the following parameters:

- `COUNTERS_SAVE_FULLFRAME` determines saving options of full frames in counters: `always`, `detect` - only save if faces or silhouettes have been detected, `never`.
- `COUNTERS_FULLFRAME_JPEG_QUALITY`: JPEG quality of full frames,
- `COUNTERS_THUMBNAIL_JPEG_QUALITY`: JPEG quality of thumbnails.


```
sudo vi /etc/ffsecurity/config.py

# counters full frame saving options:
# `always` - save always
# `detect` - save only if faces or silhouettes have been detected
# `never` - never save full frames
'COUNTERS_SAVE_FULLFRAME': 'always',
'COUNTERS_FULLFRAME_JPEG_QUALITY': 75,
'COUNTERS_THUMBNAIL_JPEG_QUALITY': 75,
...
```

Create Counter

To set up a counter, do the following:

1. Navigate to the *Counters* tab.
2. Click +.

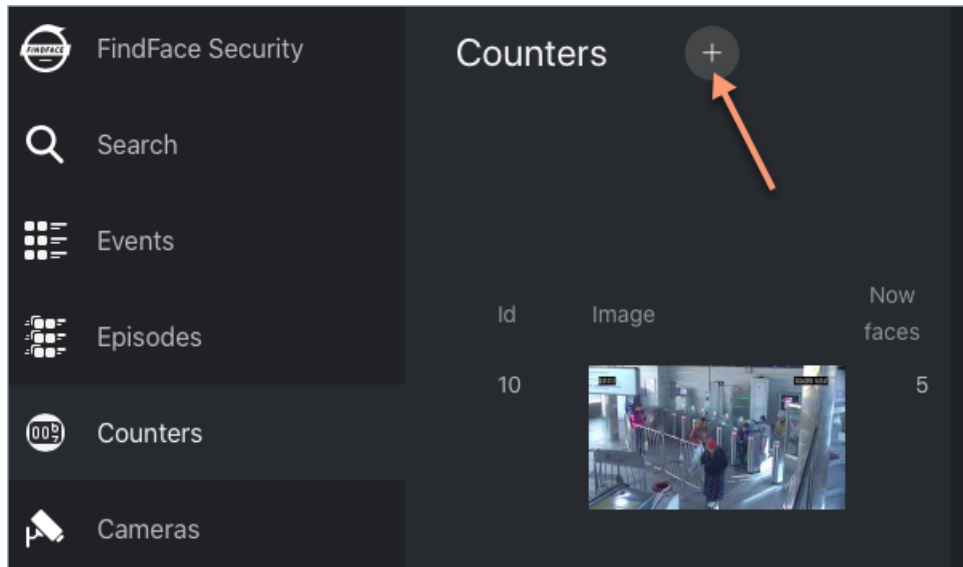


3. Specify the counter name.

The screenshot displays the 'Create Counter' form within the application. The form has a title bar with 'Create Counter' and a tab labeled 'Information'. It contains several input fields and checkboxes. The 'Name' field is labeled with a red asterisk and contains the text 'Metro Counter'. The 'Camera' field is a dropdown menu currently showing '1'. The 'Count up interval (seconds)' field is labeled with a red asterisk and contains the value '5'. There are three checkboxes, all of which are checked: 'Detect Faces', 'Detect Silhouettes', and 'Active'. At the bottom of the form are two buttons: a purple 'Save' button and a grey 'Back' button.


4. Select the camera for counting.
5. Specify the interval between two consecutive screenshots used for counting.
6. Check *Detect Faces* to count faces.
7. Check *Detect Silhouettes* to count silhouettes. Silhouettes detection has to be *enabled*.
8. Make sure that the counter is *Active*.

9. Click *Save*. You will see two new tabs appear.
10. (Optional) Navigate to the *Region of Interest* tab to specify the face/silhouette tracking region within the camera field of view.

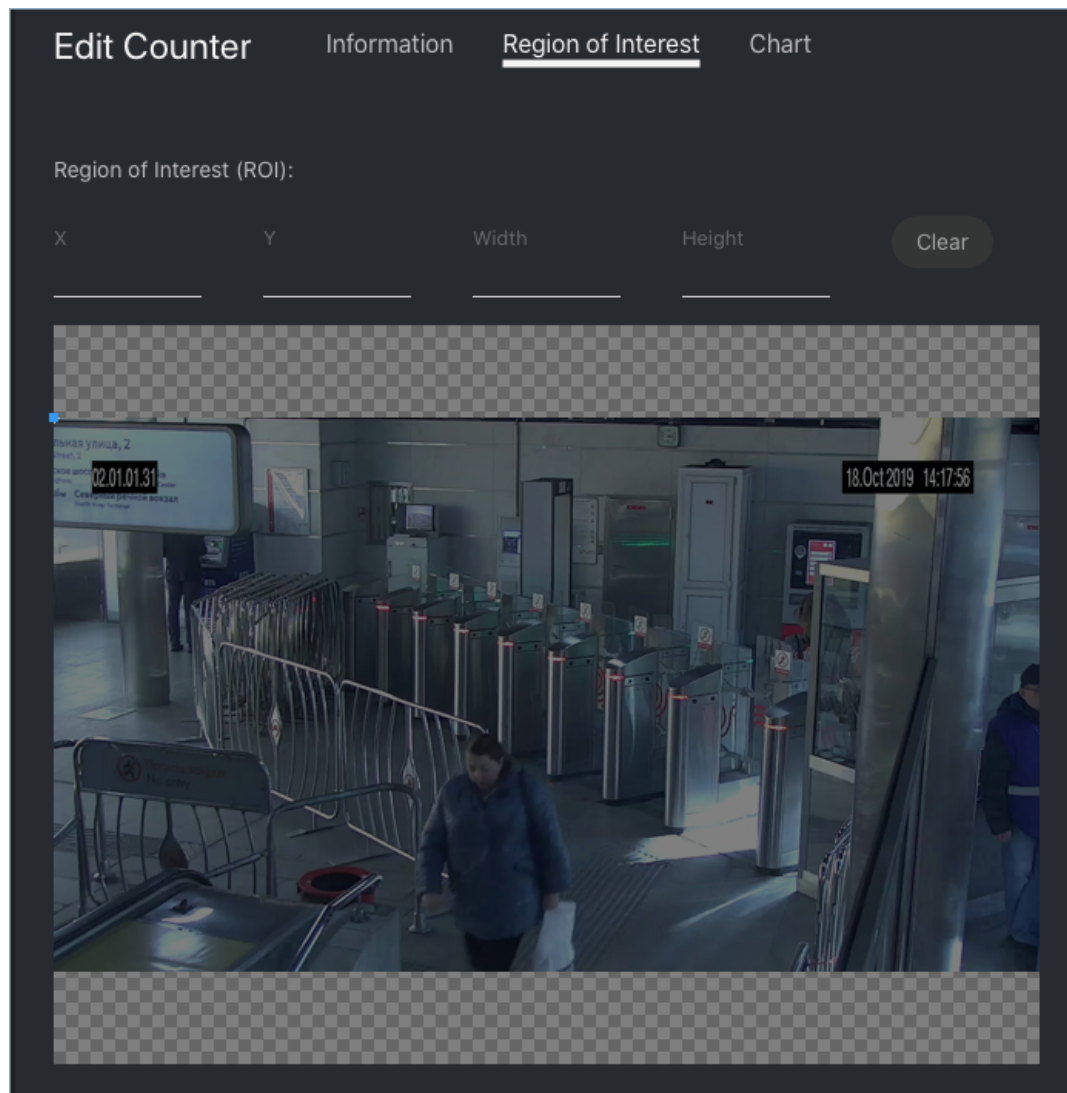

Counter Chart

To see the counter chart for the last hour, 24 hours, or week, navigate to the *Chart* tab in the counter settings.

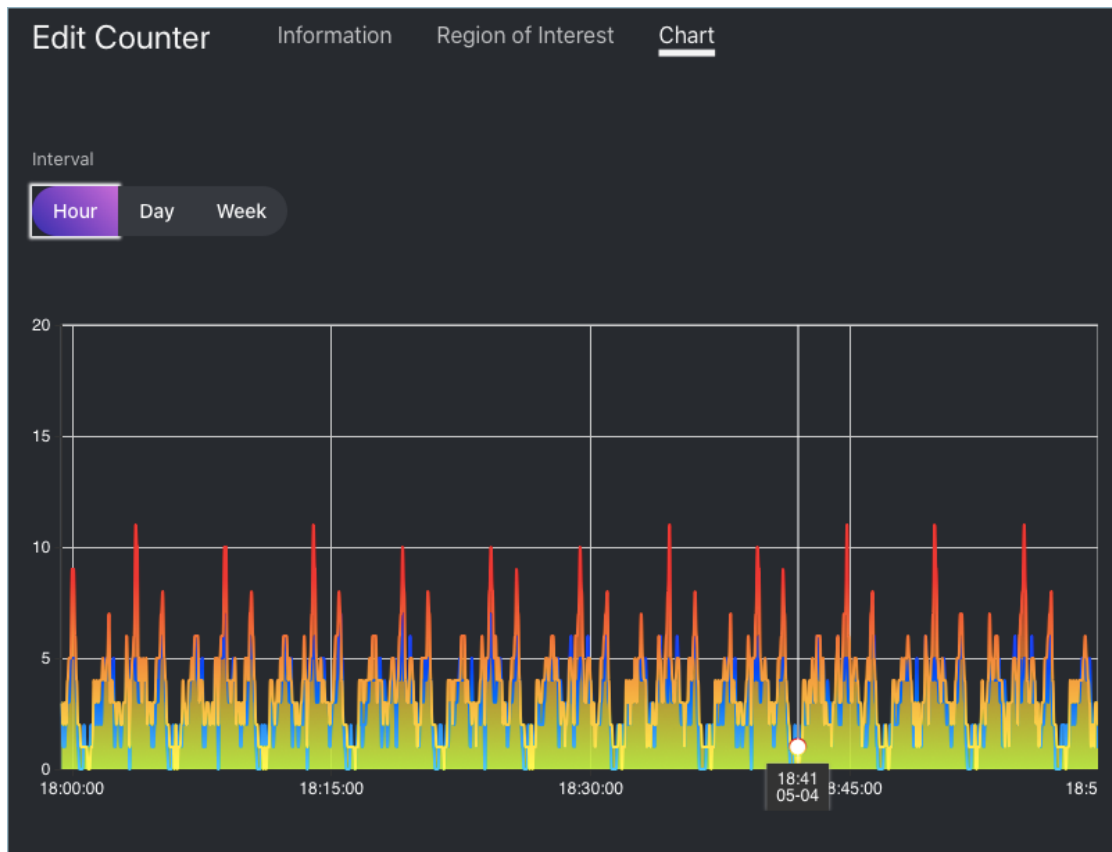

Work with Counter Records

Static screenshots taken by a counter, with the number of faces and silhouettes in them, are saved as counter records.

To see the counter records, navigate to the *Counters* tab and click on the required counter.

Counter records					
FindFace Security					
Search					
Events					
Episodes					
Counters					
Cameras					
Video Wall					
Dossiers					
Videos					
Preferences					
Charlie Root					
Counter records					
Page 1					
Id					
77374		2	0	2020-05-04 18:51:43	
77373		2	0	2020-05-04 18:51:41	
77372		2	0	2020-05-04 18:51:40	
77371		2	1	2020-05-04 18:51:38	
77370		1	1	2020-05-04 18:51:36	
77369		1	2	2020-05-04 18:51:35	
Counter					
Metro Counter					
Cameras					
Not selected					
Camera groups					
Not selected					
Start					
End					
Count faces					
From					
Count silhouettes					
From					
Id					
Reset filters					

To work with counter records, use the following filters:

- Counter
- Cameras
- Camera groups
- Time period
- Number of faces in record
- Number of silhouettes in record
- Record id

Set Webhook for Counter


To take it up a notch, *configure a webhook* for counter records with a specific number of faces and silhouettes.

See also:

- *Silhouette Detection*
- *Webhooks*

1.6.6 General Preferences

To configure the generic confidence threshold for face verification, confidence threshold for episodes, thumbnail JPEG quality, and automatic events/episodes cleanup, navigate to the *Preferences* tab. Click *General*. After you are finished, click *Update*.

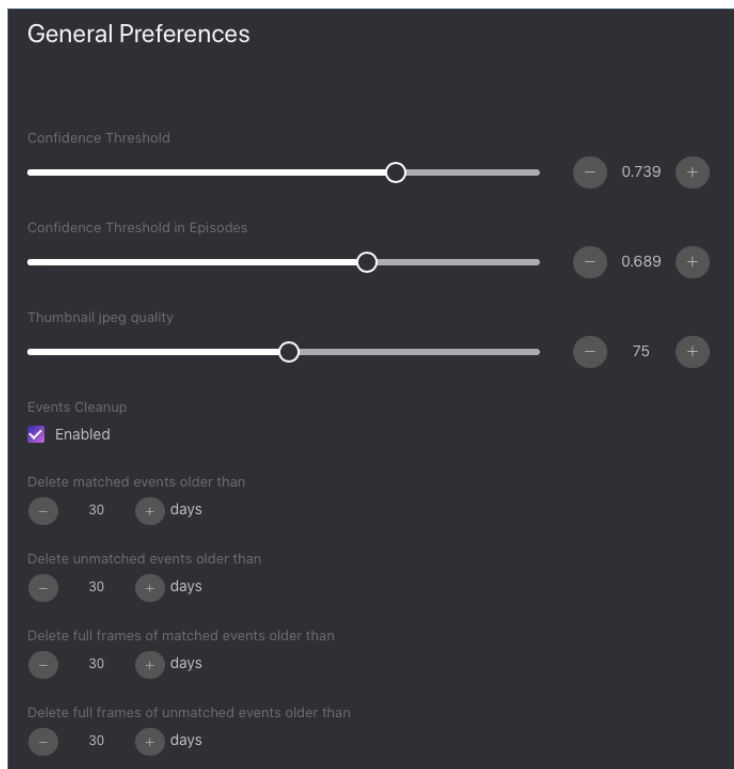

The screenshot shows the 'General Preferences' window with a dark background. It contains several settings:

- Confidence Threshold:** A slider set to 0.739, with minus and plus buttons.
- Confidence Threshold in Episodes:** A slider set to 0.689, with minus and plus buttons.
- Thumbnail jpeg quality:** A slider set to 75, with minus and plus buttons.
- Events Cleanup:** A checkbox labeled 'Enabled' which is checked.
- Delete matched events older than:** A numeric input set to 30, followed by 'days'.
- Delete unmatched events older than:** A numeric input set to 30, followed by 'days'.
- Delete full frames of matched events older than:** A numeric input set to 30, followed by 'days'.
- Delete full frames of unmatched events older than:** A numeric input set to 30, followed by 'days'.

In this section:

- *Generic Confidence Threshold*
- *Confidence Threshold for Episodes*
- *Thumbnail JPEG Quality*
- *Automatic Event And Episode Cleanup*

Generic Confidence Threshold

FindFace Security verifies that a detected face and some face from the dossiers belong to the same person (i. e. the faces match), based on the pre-defined similarity threshold. The default threshold is set to 0.739. If necessary, you can change the generic threshold.

Note: The higher is the threshold, the less are chances that a wrong person will be positively verified, however, some valid photos may also fail verification.

Tip: You can configure the confidence threshold individually for each *camera*, *camera group*, and *watch list*.

Important: The default generic confidence threshold is optimal for the majority of recognition cases. We do not recommend changing it on your own. Be sure to consult with our technical experts by support@ntechlab.com.

Confidence Threshold for Episodes

To construct an episode, the system searches the biometric database for *recent* events with similar faces with a pre-defined similarity threshold. The default threshold is set to 0.689, which is considered as optimum. If necessary, you can change this value. Be sure to consult with our technical experts prior (support@ntechlab.com).

Thumbnail JPEG Quality

Subject to JPEG quality, thumbnails may take up a significant amount of disc volume. Use the *General* tab to configure the parameter.


Automatic Event And Episode Cleanup

Use the same tab to schedule purging old events and related episodes from the database on a regular basis. You can purge matched and unmatched events/episodes on different schedules, as well as purge only full frames for matched and unmatched events/episodes.

1.6.7 Compare Faces

FindFace Security allows you to compare 2 faces. Do the following:


1. Navigate to the *Preferences* tab. Click *Verify*.

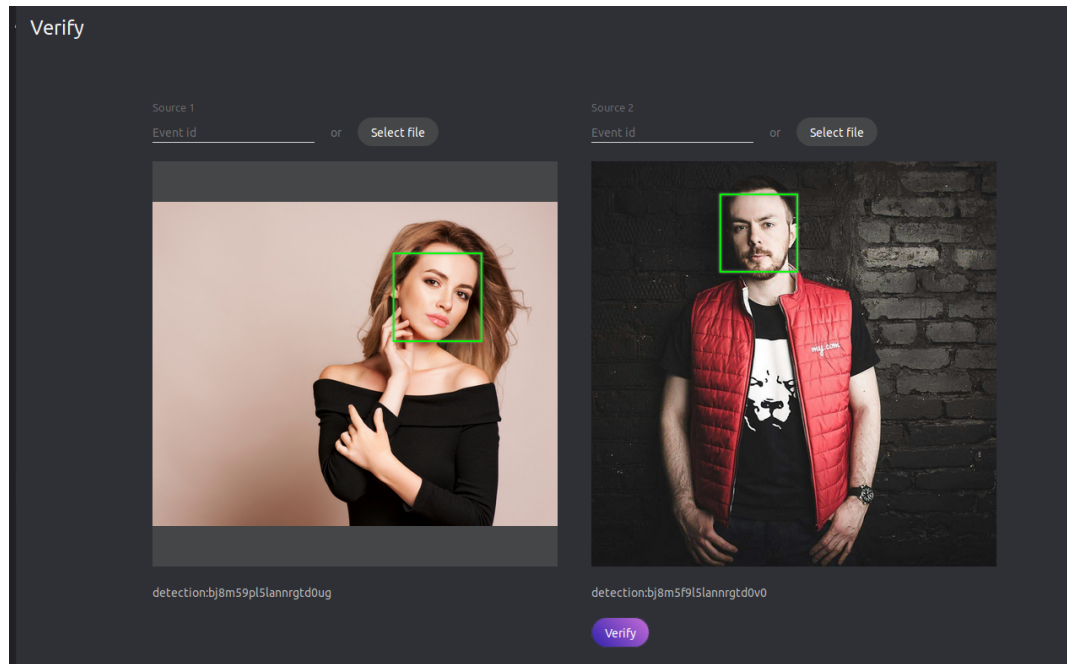

2. Specify the IDs of events that feature the faces you want to compare, and/or upload photos with the faces.


Tip: You can find event IDs on the *Events* tab.

3. Click *Verify*. You will see the probability of the faces belonging to the same person appear.

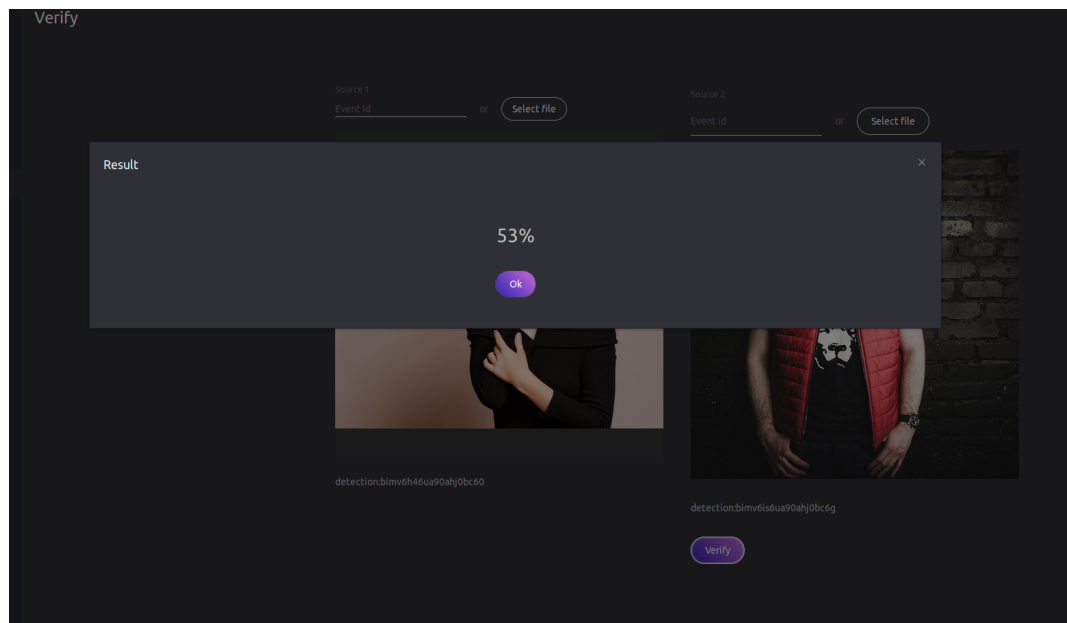

1.6.8 Switch Language

To switch the interface language, navigate to the *Preferences* -> *Appearance*.

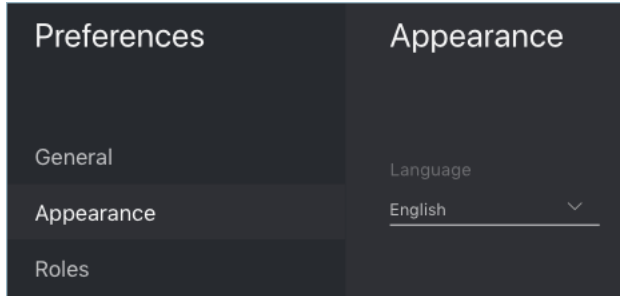

1.7 Advanced Functionality

1.7.1 Configure Episodes

In this section:

- *About Episodes*
- *Episode Settings*
- *Grant Rights for Episodes*

About Episodes

An episode is a set of identification events that feature faces of the same person, detected within a certain period of time.

There are two types of episodes:

- **LIVE:** an episode is currently active, with more events to be possibly added.
- **Closed:** an episode is closed, no events can be added.

Episode Settings

To configure the episodes, use the `findface-security` configuration file. You need to add the following parameters into the `FFSECURITY` section:

- `EPISODE_SEARCH_INTERVAL`: The period of time preceding an event, within which the system searches the biometric database for events with similar faces. If no such an event is found, the system creates a new episode. Otherwise, it picks up the most relevant event from a **LIVE** episode after sorting out the 100 most recent similar faces.

Note: The threshold similarity in episodes differs from that for face verification. See *General Preferences*.

- `EPISODE_MAX_DURATION`: The maximum episode duration in seconds. After this time, an episode automatically closes.

- `EPISODE_EVENT_TIMEOUT`: The maximum time in seconds since the last event has been added to an episode. After this time, an episode automatically closes.

```
sudo vi /etc/ffsecurity/config.py

...

FFSECURITY = {
    ...
    'EPISODE_SEARCH_INTERVAL': 60,
    'EPISODE_MAX_DURATION': 300,
    'EPISODE_EVENT_TIMEOUT': 30,
    ...
}

...
```

See also:

To see episodes work, navigate to the *Episodes* tab. See *Organize Events with Episodes* for details.

Grant Rights for Episodes

A user receives a notification of a new episode if they have rights for the first event. Viewing new events in the episode also requires proper rights.

The right for an event consists of the rights for a corresponding camera and watch list.

Note: To see unmatched events, you only need the rights for a camera.

To manage rights of a role for the entire `Episode` entity, open permissions for this role and adjust the `eventepisode` permission.

Tip: See *User Management*.

Information	Watch Lists	Camera Groups	<u>Permissions</u>		
Name	View	Change	Add	Delete	
dossierlist	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
dossier	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
dossierface	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
cameragroup	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
camera	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
listevent	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
eventepisode	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
uploadlist	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
upload	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
user	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
webhook	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
videosource	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
counter	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
person	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
					Active
configure_sova					<input checked="" type="checkbox"/>
configure_genetec					<input checked="" type="checkbox"/>
configure_ntls					<input checked="" type="checkbox"/>
batchupload_dossier					<input checked="" type="checkbox"/>
view_runtime_setting					<input checked="" type="checkbox"/>
change_runtime_setting					<input checked="" type="checkbox"/>

1.7.2 Allocate findface-video-worker to Camera Group

In a distributed architecture, it is often necessary that video streams from a group of cameras be processed *in situ*, without being redistributed across remote `findface-video-worker` instances by the principal server.

Note: Among typical use cases are hotel chains, chain stores, several security checkpoints in the same building, etc.

In this case, allocate the local `findface-video-worker` to the camera group.

Do the following:

1. Navigate to the *Preferences* tab. Click *Camera Groups*.

2. Open the camera group settings.
3. In the *Labels*, create or select one or several allocation labels. Save changes.
4. Open the `findface-video-worker` configuration file and specify the allocation labels in the following format: `label_name=true` (label `terminal_1` in the example below).

```
sudo vi /etc/findface-video-worker-cpu.ini
sudo vi /etc/findface-video-worker-gpu.ini

labels = terminal_1=true
```

5. Restart `findface-video-worker`.

```
sudo systemctl restart findface-video-worker-cpu.service
sudo systemctl restart findface-video-worker-gpu.service
```

Note: If a camera is assigned an allocation label, its video stream can be processed by a `findface-video-worker` instance with the same label, as well as by all unlabeled `findface-video-worker` instances.

Warning: If a labeled camera is processed by an unlabeled `findface-video-worker` instance and a free similar-labeled instance appears, the camera won't automatically switch to the latter. To switch the camera, restart the similar-labeled `findface-video-worker` instance.

1.7.3 Distributed Dossier Database

In a distributed architecture, it is often necessary to have the dossier database distributed among several hosts.

In the current implementation, the dossier database is available for editing only on the principal server known as `master`. It is in sync with several additional FindFace Security instances that serve as `slaves`. On the slaves, the dossier database is available only for reading and monitoring.

Important: You will be able to delete dossiers on the slaves if the master is unavailable.

Important: If a watch list on the future slave already contains dossiers, they will be replaced with those from the master during the first synchronization. All information in the previous dossiers will be lost.

In this section:

- *Configure Master/Slave Synchronization*
- *Replicate Watch List from Master to Slaves*
- *Set Synchronization Time*
- *Cancel Watch List Replication and Synchronization*

- *Duplicate Functionality to Web Interface*

Configure Master/Slave Synchronization

To configure master/slave synchronization, do the following:

1. On the master, open the `findface-security` configuration file. Come up with a synchronization token and specify it in the `SYNC_TOKEN` parameter.

```
sudo vi /etc/ffsecurity/config.py

...

SYNC_TOKEN = 'ABC_123456789'
```

2. Copy the synchronization token into the `findface-security` configuration file on the slave(s).
3. Make sure that the `EXTERNAL_ADDRESS` parameter of the `findface-security` configuration file on the slave(s) contains the same address as on the master.

The master/slave sync is now set and will be enabled once you configure a watch list replication from the master to slave(s).

Replicate Watch List from Master to Slaves

To replicate a watch list from the master to slave instances, send a POST request to the slave with the following parameters in the body:

- `remote_dossier_list`: id of the original watch list on the master
- `remote_url`: master URL
- `slave_dossier_list`: id of the watch list on the slave, which is to be a replica of the original watch list

```
POST /sync/dossier-lists/
{remote_dossier_list: 1,
remote_url: "http://172.17.46.14",
slave_dossier_list: 3}
```

Set Synchronization Time

By default, replicated watch lists on the slaves and the master are synced nightly at 3 a.m. You can modify the synchronization time as follows:

1. Open the `findface-security` configuration file on the master.

```
sudo vi /etc/ffsecurity/config.py
```

2. Paste the following lines and set your own schedule.

```
...

SYNC_TIME = {
    'hour': 3, # 24 hour format
    'minute': 0,
}
```

Cancel Watch List Replication and Synchronization

To cancel a watch list replication and synchronization, send the following API request to the slave with the `{id}` of the watch list on the slave:

```
DELETE /sync/dossier-lists/{id}/
```

Duplicate Functionality to Web Interface

By default, you can enable and disable watch list replication only via API. To make the functionality available in the web interface as well, do the following:

1. Open the `findface-security` configuration file on the master.

```
sudo vi /etc/ffsecurity/config.py
```

2. Enable the `ffsecurity_sync` plugin by adding the line `INSTALLED_APPS.append('ffsecurity_sync')` into the plugins section:

```
...  
# integration plugins  
...  
INSTALLED_APPS.append('ffsecurity_sync')
```

3. Do the same on each slave.
4. On each host, migrate the main database architecture from FindFace Security to **PostgreSQL** and restart the `findface-security` service.

```
sudo findface-security migrate  
sudo systemctl restart findface-security.service
```

1.7.4 Dossier Custom Tabs, Fields, and Filters

It is often necessary that a dossier feature additional tabs and fields.

To add custom tabs and fields to a dossier, do the following:

1. Prepare the list of custom tabs and fields you want to add to a dossier.
2. Open the `findface-security` configuration file.

```
sudo vi /etc/ffsecurity/config.py
```

3. Into the `FFSECURITY` section, uncomment the `CUSTOM_FIELDS` section and modify the exemplary content, considering the following:

- `'items'`: the list of fields in a dossier. Describe each field with the following parameters:
 - `'name'`: field's internal name, string.
 - `'label'`: field's label in the web interface, string.
 - `'display'`: display format (`form` or `list`), string or array.
 - `'tab'`: tab that features the field. If not specified, the field appears on the main dossier page (that with a photograph).

- 'editable': field's editability, boolean.
- 'type': field data type, string. Possible values:
 - * list: requires items, additional parameter for lists (see below), expects objects {id, name} in dictionaries;
 - * valuelist: expects elements of primitive types.
 - * objectlist: allows for creating arrays of objects of required types.
 - * datetime: primitive data type displayed as a datetime list.
 - * date: primitive data type displayed as a date picker.
 - * boolean: primitive data type displayed as a checkbox.
 - * string: primitive data type string.
- additional parameters for lists (type=list, type=valuelist):
 - * multiple: possibility of selecting several items in the list, boolean.
 - * items: dictionary used as a data source for the list.
 - * allow_create: possibility of adding new items to the list.
 - * custom_id: custom field for id (type=list).
- additional parameters for object lists (type=objectlist).
 - * object: objects used as a data source for the object list.
 - * simple: indicator that the field expects data of a primitive type instead of objects, for example, expects strings with phone numbers.
- 'filters': the list of search filters associated with the custom fields. Parameters:
 - 'name': filter's internal name,
 - 'label': filter's label in the web interface,
 - 'field': associated field in the format [field name].
- 'tabs': the list of tabs in a dossier. The first listed tab corresponds to the main dossier page.

```
FFSECURITY = {
...

# Edit CUSTOM_FIELDS section to customize dossier content.
# Below is an example for integration FindFace Security with Sigur.
'CUSTOM_FIELDS': {
    'dossier_meta': {
        'items': [
            {
                'name': 'personid',
                'default': '',
                'label': 'PersonID',
                'display': ['list', 'form'],
                'description': 'Sigur person ID'
            },
            {
                'name': 'firstname',
                'default': '',
```

(continues on next page)

(continued from previous page)

```

        'label': 'First Name',
        'display': ['list', 'form'],
        'description': 'Sigur first name'
    },
    {
        'name': 'lastname',
        'default': '',
        'label': 'Last Name',
        'display': ['list', 'form'],
        'description': 'Sigur last name'
    },
    {
        'name': 'version',
        'default': '',
        'label': 'Version',
        'display': ['list', 'form'],
        'description': 'Sigur photo version'
    }
],
'filters': [
    {
        'name': 'personid',
        'label': 'Sigur person ID filter',
        'field': 'personid'
    }
]
}
},

```

4. You will see the custom content appear in the web interface.

1.7.5 Console Bulk Photo Upload

To bulk-upload photos to the dossier database, you can use the **findface-security-uploader** utility from the FindFace Security package (in addition to the web interface upload functionality). Use this utility when you need to upload a large number of photos (more than 10,000).

Tip: To view the **findface-security-uploader** help, execute:

```
findface-security-uploader --help
```

Do the following:

1. Write the list of photos and metastrings to a CSV or TSV file.

Important: The file used as a metadata source must have the following format: path to photo | metastring.

To prepare a TSV file, use either a script or the `find` command.

Note: Both the script and the command in the examples below create the `images.tsv` file. Each image in the list will be associated with a metastring coinciding with the image file name in the format `path to photo`

```
| metastring.
```

To build a TSV file listing photos from a specified directory (/home/user/25_celeb/ in the example below), run the following command:

```
python3 tsv_builder.py /home/user/25_celeb/
```

The find usage example:

```
find photos/ -type f -iname '*g' | while read x; do y="${x%.*}"; printf "%s\t%s\n"
↪ "$x" "${y##*/}"; done
```

2. Create a job file out of a CSV or TSV file by using add. As a result, a file enroll-job.db will be created and saved in a current directory.

```
findface-security-uploader add images.tsv
```

The add options:

- --format: input file format, tsv by default,
- --delimiter: field delimiter, by default "\t" for TSV, and ",", " for CSV.

Note: A job file represents a sqlite database which can be opened on the **sqlite3** console.

3. Process the job file by using run.

```
findface-security-uploader run --dossier-lists 2 --api http://127.0.0.1:80 --user_
↪admin --password password
```

The run options:

- --parallel: the number of photo upload threads, 10 by default. The more threads you use, the faster the bulk upload is completed, however it requires more resources too.
- --api: findface-security API URL, http://127.0.0.1:80/ by default.
- --user: login.
- --password: password.
- --dossier-lists: comma-separated list of the watch lists id's.
- --failed: should an error occur during the job file processing, correct the mistake and try again with this option.

1.7.6 Deduplicate Events

In this section:

- *Enable Deduplication*
- *How It Works*

Consider enabling Deduplication to exclude coinciding facial recognition events within one camera group.

Enable Deduplication

To enable event deduplication, do the following:

1. Enable the offline mode of video face detection for each camera in the group. See [Add Camera](#) for details.
2. Navigate to the *Preferences* tab. Click *Camera Groups*.
3. Open the camera group settings.
4. Check *Deduplicate Events* and specify the deduplication interval in seconds.

How It Works

The deduplication algorithm works as follows:

1. In the offline mode, the server receives one best face snapshot per tracking session on a camera (a tracking session continues until a face disappears from the camera field of view).
2. If within the same camera group, there are several tracking sessions on a camera(s) within the specified deduplication interval, FindFace Security will handle the received snapshots in the following way:
 - If there is a match with a dossier within the preceding deduplication interval, FindFace Security drops a newly acquired snapshot. Otherwise, the snapshot is saved to the database.
 - For unmatched faces, when performing deduplication, FindFace Security considers both similarity between faces in the snapshots and face quality. FindFace Security drops all snapshots of similar faces within the deduplication interval unless a new face is of higher quality. This guarantees that the system deduplicates events without skipping high-quality faces, which are essential for further video analytics.

1.7.7 Real-time Face Liveness Detection

Note: The *liveness detector* is much slower on CPU than on GPU.

To spot fake faces and prevent photo attacks, use the integrated 2D anti-spoofing system that distinguishes a live face from a face image. Due to the analysis of not one, but a number of frames, the algorithm captures any changes in a facial expression and skin texture. This ensures that it is a live person in front of a camera and eliminates the possibility of fraud using images on paper or mobile device screens.

The liveness detector estimates a face liveness with a certain level of confidence and returns the confidence score along with a binary result *real/fake*, depending on the pre-defined liveness threshold.

In this section:

- *Enable Face Liveness Detector*
- *Configure Liveness Threshold*
- *Face Liveness in Web Interface*

Enable Face Liveness Detector

To enable the face liveness detector, do the following:

1. Open the `/etc/findface-video-worker-gpu.ini` (`/etc/findface-video-worker-cpu.ini`) configuration file. In the `liveness` section, specify the path to the neural network model (`fnk`) and normalizer (`norm`) which are used in the face liveness detector.

```
sudo vi /etc/findface-video-worker-gpu.ini

#-----
[liveness]
#-----
## path to liveness fnk
## type:string env:CFG_LIVENESS_FNK longopt:--liveness-fnk
fnk = /usr/share/findface-data/models/faceattr/liveness.v3.gpu.fnk

## path to normalization for liveness
## type:string env:CFG_LIVENESS_NORM longopt:--liveness-norm
norm = /usr/share/findface-data/models/facenorm/crop2x.v2_maxsize400.gpu.fnk
```

```
sudo vi /etc/findface-video-worker-cpu.ini

#-----
[liveness]
#-----
## path to liveness fnk
## type:string env:CFG_LIVENESS_FNK longopt:--liveness-fnk
fnk = /usr/share/findface-data/models/faceattr/liveness.v3.cpu.fnk

## path to normalization for liveness
## type:string env:CFG_LIVENESS_NORM longopt:--liveness-norm
norm = /usr/share/findface-data/models/facenorm/crop2x.v2_maxsize400.cpu.fnk
```

2. Restart `findface-video-worker`.

```
sudo systemctl restart findface-video-worker-gpu
sudo systemctl restart findface-video-worker-cpu
```

Configure Liveness Threshold

If necessary, you can adjust the liveness threshold in the `/etc/ffsecurity/config.py` configuration file. The liveness detector will estimate a face liveness with a certain level of confidence. Depending on the threshold value, it will return a binary result `real` or `fake`.


Note: The default value is optimal. Before changing the threshold, we recommend you to seek advice from our experts by support@ntechlab.com.

```
sudo vi /etc/ffsecurity/config.py

'LIVENESS_THRESHOLD': 0.75,
```


Face Liveness in Web Interface

Once the face liveness detector configured, you will see liveness estimation for each event.

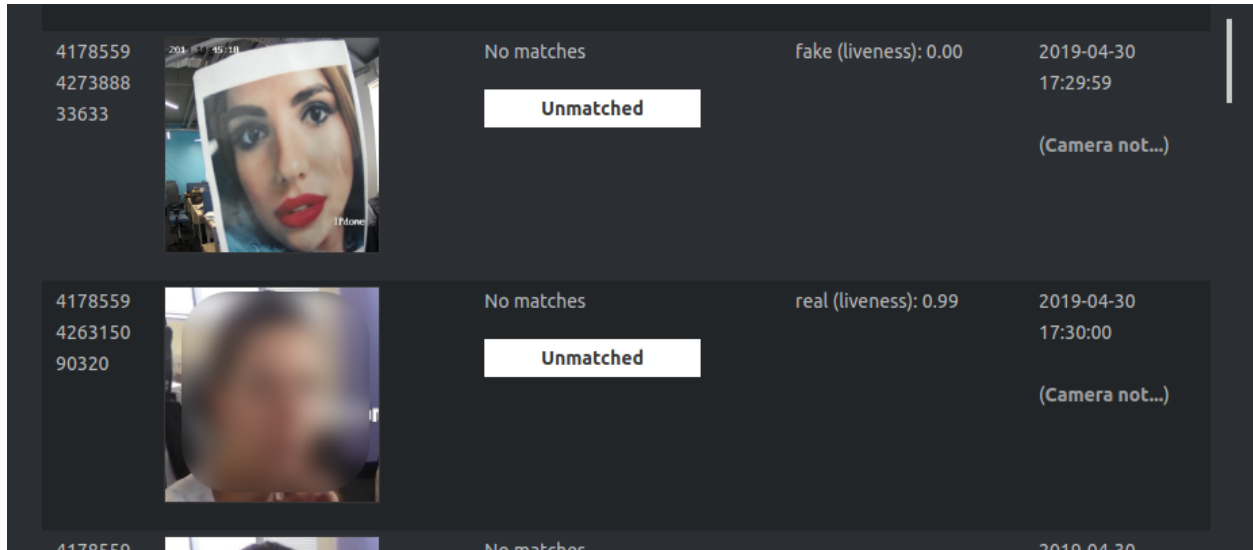

Note: The liveness score is `null` when the liveness detector is unable to estimate the face liveness in the provided image.

Use the *Liveness* filter to display only real or only fake faces in the event list.

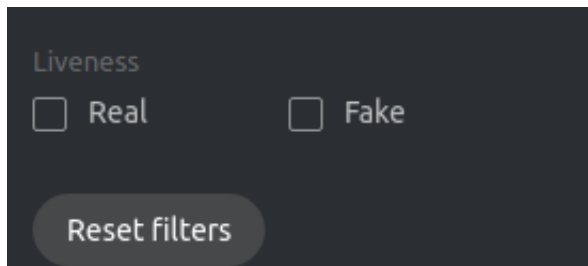

1.7.8 Face Features Recognition

Subject to your needs, you can enable automatic recognition of such face features as gender, age, emotions, glasses, beard, and face mask. This functionality can be activated on both GPU- and CPU-accelerated video face detectors.

In this section:

- *Enable Face Features Recognition*
- *Display Features Recognition Results in Events*
- *Face Features in Events*

Enable Face Features Recognition

Important: This step will enable face features recognition via HTTP API.

To enable automatic recognition of face features, open the `/etc/findface-extraction-api` configuration file and enable relevant recognition models: gender, age, emotions, glasses, beard, and face mask. Be sure to choose the right acceleration type for each model, matching the acceleration type of `findface-extraction-api`: CPU or GPU. Be aware that `findface-extraction-api` on CPU can work only with CPU-models, while `findface-extraction-api` on GPU supports both CPU- and GPU-models.

```
sudo vi /etc/findface-extraction-api.ini

models:
  age: faceattr/age.v1.cpu.fnk
  emotions: faceattr/emotions.v1.cpu.fnk
  face: face/ifruit_320.cpu.fnk
  gender: faceattr/gender.v2.cpu.fnk
  beard: faceattr/beard.v0.cpu.fnk
  glasses3: faceattr/glasses3.v0.cpu.fnk
  medmask3: faceattr/medmask3.v1.cpu.fnk
```

The following models are available:

Note: You can find face features recognition models at `/usr/share/findface-data/models/faceattr/`.

```
ls /usr/share/findface-data/models/faceattr/
age.v1.cpu.fnk  age.v1.gpu.fnk  beard.v0.cpu.fnk  beard.v0.gpu.fnk  emotions.v1.cpu.
↳fnk  emotions.v1.gpu.fnk  gender.v2.cpu.fnk  gender.v2.gpu.fnk  glasses3.v0.cpu.fnk
↳  glasses3.v0.gpu.fnk  medmask3.v1.cpu.fnk  medmask3.v1.gpu.fnk  liveness.v3.gpu.fnk
```

Face feature	Acceleration	Configuration file parameter
face (biometry)	CPU	face: face/ifruit_320.cpu.fnk face: face/ifruit_160.cpu.fnk
	GPU	face: face/ifruit_320.gpu.fnk face: face/ifruit_160.gpu.fnk
age	CPU	age: faceattr/age.v1.cpu.fnk
	GPU	age: faceattr/age.v1.gpu.fnk
gender	CPU	gender: faceattr/gender.v2.cpu.fnk
	GPU	gender: faceattr/gender.v2.gpu.fnk
emotions	CPU	emotions: faceattr/emotions.v1.cpu.fnk
	GPU	emotions: faceattr/emotions.v1.gpu.fnk
glasses	CPU	glasses3: faceattr/glasses3.v0.cpu.fnk
	GPU	glasses3: faceattr/glasses3.v0.gpu.fnk
beard	CPU	beard: faceattr/beard.v0.cpu.fnk
	GPU	beard: faceattr/beard.v0.gpu.fnk
face mask	CPU	medmask3: faceattr/medmask3.v1.cpu.fnk
	GPU	medmask3: faceattr/medmask3.v1.gpu.fnk

Tip: To disable a recognition model, simply pass an empty value to a relevant parameter. Do not remove the parameter

itself as in this case the system will be searching for the default model.

```
models:
  gender: ""
  age: ""
  emotions: ""
```

Restart `findface-extraction-api`.

```
sudo systemctl restart findface-extraction-api
```

Once the models are enabled, be sure to *configure* the web interface to display the recognition results.

Display Features Recognition Results in Events

To display the face features recognition results in the event list, add the following line into the `FFSECURITY` section: `'EVENTS_FEATURES': ['gender', 'age', 'emotions', 'beard', 'glasses', 'medmask']`, subject to the list of enabled models.

Warning: This line must be placed between `SF_API_ADDRESS` and `LIVENESS_THRESHOLD` as shown in the example.

```
sudo vi /etc/ffsecurity/config.py

...
FFSECURITY = {
...
'SF_API_ADDRESS': 'http://127.0.0.1:18411',
'EVENTS_FEATURES': ['gender', 'age', 'emotions', 'beard', 'glasses', 'medmask'],
'LIVENESS_THRESHOLD': 0.75,
'BEARD_THRESHOLD': 0.7,
}
```

Restart `findface-security`.

```
sudo systemctl restart findface-security
```

Face Features in Events





Once the face features recognition configured, you will see the recognition result for each found face in the following format:

Face feature	Result format	Example
Age	Feature: age: number of years	age: 33
Gender	Result: male/female (feature: gender): algorithm confidence in result	female (gender): 0.95
Emotions	Result: angry/disgust/fear/happy/sad/surprise (feature: emotions): algorithm confidence in result	happy (emotions): 0.99
Glasses	Result: eye/sun/none (feature: glasses): algorithm confidence in result	none (glasses): 0.87
Beard	Result: beard/none (feature: beard): algorithm confidence in result	none (beard): 0.91
Face mask	Result: none/correct (feature: face mask): algorithm confidence in result	none (face mask): 0.93

Events

Matched: 0, Total: 2484

⏸
✓ Acknowledge All
20
« < > »
Page 1

Id	Detected	Matched to
418245 209874 639092 5		No matches <div>Unmatched</div> age: 27 none (beard): 0.03 surprise (emotions): 0.15 female (gender): 1.00 none (glasses): 1.00
418245 205015 957157 1		No matches <div>Unmatched</div> age: 24 beard (beard): 0.92 happy (emotions): 0.00 male (gender): 1.00 none (glasses): 1.00
418245 189554 075073 2		No matches <div>Unmatched</div> age: 27 beard (beard): 0.97 angry (emotions): 0.00 male (gender): 1.00 sun (glasses): 0.96
418245		No matches age: 21

Dossier

Dossier

Watch Lists

Not selected

Matches

All

Acknowledged

All

Cameras

Not selected

Camera groups

Not selected

Start

End

Id

Age

From

To

Filter events by face features when needed.

1.7.9 Silhouette Detection

To collect real-time *statistics* on human silhouettes, you first have to enable silhouette detection.

In this section:

- *Enable Silhouette Detection*

Enable Silhouette Detection

To enable detection of human silhouettes, do the following:

1. Open the `/etc/findface-extraction-api` configuration file and add a new detector `edie` (`edie_rc2.cpu.fnk/edie_rc2.gpu.fnk`) with relevant settings, as shown in the example below.

```
sudo vi /etc/findface-extraction-api.ini

detectors:
  max_batch_size: 1
  instances: 1
  models:
    cheetah:
      model: facedet/cheetah.cpu.fnk
      options:
        min_object_size: 32
        resolutions:
          - 256x256
          - 384x384
          - 512x512
          - 768x768
          - 1024x1024
          - 1536x1536
          - 2048x2048
    edie:
      model: pedet/edie_rc2.cpu.fnk
      options:
        min_object_size: 16
        resolutions:
          - 1280x720
          - 1920x1080
```

Note: The values of the `edie` options in the example are considered optimal. You can adjust them, subject to your cameras' observation scenes. Contact our experts by support@ntechlab.com if you have any questions.

2. Restart `findface-extraction-api`.

```
sudo systemctl restart findface-extraction-api
```

1.7.10 Multiple Video Cards Usage

Should you have several video cards installed on a physical server, you can create additional `findface-extraction-api-gpu` or `findface-video-worker-gpu` instances and distribute them across the video cards, one instance per card.

In this section:

- *Distribute findface-extraction-api-gpu Instances Across Several Video Cards*
- *Allocate findface-video-worker-gpu to Additional Video Card*

Distribute findface-extraction-api-gpu Instances Across Several Video Cards

To distribute findface-extraction-api-gpu instances across several video cards, do the following:

1. Stop the initial findface-extraction-api-gpu service.

```
sudo service findface-extraction-api stop
```

2. Create several copies of the findface-extraction-api-gpu configuration file, subject to how many video cards you are going to use for biometric samples extraction. Append the appropriate GPU device numbers to the new configuration files names as shown in the example below (GPU devices #0 and #6).

```
/etc/findface-extraction-api@0.ini
/etc/findface-extraction-api@6.ini
```

3. Open the new configuration files. Specify the GPU device numbers and adjust the listening ports.

```
sudo vi /etc/findface-extraction-api@0.ini

listen: 127.0.0.1:18666
...

gpu_device: 0
...
```

```
sudo vi /etc/findface-extraction-api@6.ini

listen: 127.0.0.1:18667
...

gpu_device: 6
...
```

4. Start the new services.

```
sudo service findface-extraction-api@0 start
sudo service findface-extraction-api@6 start
```

Allocate findface-video-worker-gpu to Additional Video Card

To create an additional findface-video-worker-gpu instance and allocate it to a different video card, do the following:

1. Display the status of the findface-video-worker-gpu primary service by executing:

```
sudo systemctl status findface-video-worker-gpu.service
```

2. Find the full path to the service in the line Loaded: loaded (/lib/systemd/system/findface-video-worker-gpu.service; enabled; vendor preset: enabled. It is findface-video-worker-gpu.service in our example (name may vary). Create a copy of the service under a new name.

```
sudo cp /lib/systemd/system/findface-video-worker-gpu.service /lib/systemd/system/  
↪findface-video-worker-gpu2.service`
```

3. In the same manner, create a copy of the primary service configuration file under a new name.

```
sudo cp /etc/findface-video-worker-gpu.ini /etc/findface-video-worker-gpu2.ini
```

4. Open the just created configuration file and actualize the GPU device number to use.

```
sudo vim /etc/findface-video-worker-gpu2.ini  
  
## cuda device number  
device_number = 1
```

5. Open the new service and specify the just created configuration file.

```
sudo vim /lib/systemd/system/findface-video-worker-gpu2.service  
  
ExecStart=/usr/bin/findface-video-worker-gpu --config /etc/findface-video-worker-  
↪gpu2.ini
```

6. Reload the systemd daemon to apply the changes.

```
sudo systemctl daemon-reload
```

7. Enable the new service autostart.

```
sudo systemctl enable findface-video-worker-gpu2.service  
  
Created symlink from /etc/systemd/system/multi-user.target.wants/findface-video-  
↪worker-gpu2.service to /lib/systemd/system/findface-video-worker-gpu2.service
```

8. Launch the new service.

```
sudo systemctl start findface-video-worker-gpu2.service
```

9. Check the both findface-video-worker-gpu services status.

```
sudo systemctl status findface-video-worker-* | grep -i 'Active:' -B 3  
  
findface-video-worker-gpu2.service - findface-video-worker-gpu daemon  
Loaded: loaded (/lib/systemd/system/findface-video-worker-gpu2.service; enabled;  
↪ vendor preset: enabled)  
Active: active (running) since Thu 2019-07-18 10:32:02 MSK; 1min 11s ago  
  
...  
  
findface-video-worker-gpu.service - findface-video-worker-gpu daemon  
Loaded: loaded (/lib/systemd/system/findface-video-worker-gpu.service; enabled;  
↪ vendor preset: enabled)  
Active: active (running) since Mon 2019-07-15 15:18:33 MSK; 2 days ago
```

1.7.11 Direct API Requests to Tarantool

You can use HTTP API to extract data directly from the Tarantool Database.

In this section:

- *General Information*
- *Add Face*
- *Remove Face*
- *Face Search*
- *Edit Face Metadata and Feature Vector*
- *List Galleries*
- *Get Gallery Info*
- *Create Gallery*
- *Remove Gallery*

General Information

API requests to Tarantool are to be sent to `http://<tarantool_host_ip:port>`.

Tip: The port for API requests can be found in the `FindFace.start` section of the Tarantool configuration file:

```
cat /etc/tarantool/instances.enabled/FindFace.lua

##8001:
FindFace.start("127.0.0.1", 8001)
```

Note: In the case of the standalone deployment, you can access Tarantool by default only locally (127.0.0.1). If you want to access Tarantool remotely, *alter* the Tarantool configuration file.

API requests to Tarantool may contain the following parameters in path segments:

- `:ver`: API version (v2 at the moment).
- `:name`: gallery name.

Tip: To list gallery names on a shard, type in the following command in the address bar of your browser:

```
http://<tarantool_host_ip:shard_port>/stat/list/1/99
```

The same command on the console is as such:

```
curl <tarantool_host_ip:shard_port>/stat/list/1/99 \ | jq
```

You can also list gallery names by using a direct request to Tarantool:

```
echo 'box.space.galleries:select()' | tarantoolctl connect <tarantool_host_
↪ip:shard_port>
```

Note that if there is a large number of shards in the system, chances are that a randomly taken shard does not contain all the existing galleries. In this case, just list galleries on several shards.

Add Face

```
POST /:ver/faces/add/:name
```

Parameters in body:

JSON-encoded array of faces with the following fields:

- "id": face id in the gallery, uint64_t,
- "facen": raw feature vector, base64,
- "meta": face metadata, dictionary.

Returns:

- HTTP 200 and empty body on success.
- HTTP 404 if a gallery with the given name doesn't exist.
- HTTP with a status other than 200 and error description in the body on failure.

Example

Request

```
curl -D - -s 'http://localhost:8001/v2/faces/add/testgal' --data '[
  {
    "id": 9223372036854776000,
    "facen": "qgI3vZRv/z...NpO9MdHavWlWuT0=",
    "meta": {
      "cam_id": "223900",
      "person_name": "Mary Ostin",
    }
  }
]
```

Response

```
HTTP/1.1 200 Ok
Content-length: 1234
Server: Tarantool http (tarantool v1.7.3-673-g23cc4dc)
Connection: keep-alive
```

Remove Face

```
POST /v2/faces/delete/:name
```

Parameters in body:

JSON-encoded array of face ids to be removed

Returns:

- HTTP 200 and empty body on success.
- HTTP 404 if a face with the given id is not found in the gallery.
- HTTP with a status other than 200 and error description in the body on failure.

Example

Request

```
curl -D - -s 'http://localhost:8001/v2/faces/delete/testgal' --data '[1, 4, 922, 3]'
```

Response

```
HTTP/1.1 200 Ok
Content-length: 111
Server: Tarantool http (tarantool v1.7.3-673-g23cc4dc)
Connection: keep-alive
```

Face Search

```
POST /v2/faces/search/:name
```

Parameters in body:

JSON-encoded search request with the following fields:

- `limit`: maximum number of faces in the response.
- `sort`: sorting order. Pass one of the following values: `id`: increasing order by id, `-id`: decreasing order by id, `-score`: decreasing order by face similarity (only if you search for faces with similar feature vectors).
- `filter` (filters):
 - `facen`: (optional) search for faces with similar feature vectors. Pass a dictionary with the following fields: `data`: raw feature vector, base64; `score`: range of similarity between faces [threshold similarity; 1], where 1 is 100% match.
 - `id` and `meta/<meta_key>`: search by face id and metastring content. To set this filter, use the following operators:

- * **range**: range of values, only for numbers.
- * **set**: id or metastring must contain at least one value from a given set, for numbers and strings.
- * **subset**: id or metastring must include all values from a given subset, for numbers and strings.
- * **like**: by analogy with `like` in SQL requests: only `'aa%'`, `'%aa'`, and `'%aa%'` are supported. Only for strings and `set[string]`. In the case of `set[string]`, the filter will return result if at least one value meets the filter condition.
- * **ilike**: by analogy with `like` but case-insensitive, only for strings and `set[string]`.

Returns:

- JSON-encoded array with faces on success. The value in the `X-search-stat` header indicates whether the fast index was used for the search: `with_index` or `without_index`.

Note: Fast index is not used in API v2.

- HTTP with a status other than 200 and error description in the body on failure.

Example

Request

```
curl -D - -s 'http://localhost:8001/v2/testgal/search' --data '{
  "limit": 2,
  "sort": {
    "score": -1
  },
  "filter": {
    "facen": {
      "data": "qgI3vZRv/z0BQTk9rcirOyZrNpO9MdHavW1WuT0=",
      "score": [0.75, 1]
    },
    "id": {
      "range": [922337203685400000, 9223372036854999000]
    },
    "meta": {
      "person_id": {
        "range": [444, 999]
      },
      "cam_id": {
        "set": ["12767", "8632", "23989"]
      }
    }
  }
}
```

Response


```

HTTP/1.1 200 OK
Content-length: 1234
X-search-stat: without_index
Server: Tarantool http (tarantool v1.7.3-673-g23cc4dc)
Connection: keep-alive

{
  "results": [
    {
      "facen": " qgI3vZRv/z0BQTk9rcirOyZrNpO9MdHavWlWuT0=",
      "meta": {
        "timestamp": 0,
        "photo_hash": "",
        "person_id": 777,
        "cam_id": "8632"
      },
      "score": 0.9964,
      "id": 9223372036854776000
    }
  ]
}

```

Edit Face Metadata and Feature Vector

```
POST /v2/faces/update/:name
```

Parameters in body:

JSON-encoded array with faces with the following fields:

- "id": face id, uint64_t.
- "facen": (optional) new feature vector, base64. If omitted or passed as `null`, the relevant field in the database won't be updated.
- "meta": dictionary with metadata to be updated. If some metastring is omitted or passed as `null`, the relevant field in the database won't be updated.

Returns:

- HTTP 200 and dictionary with all face parameters, including not updated, on success.
- HTTP 404 and error description if a face with the given id doesn't exist.
- HTTP with a status other than 200 and error description in the body on failure.

Example

Request

```

curl -D - -s 'http://localhost:8001/v2/faces/update/sandbox' --data '[{"id":1,"facen":null,"meta":{"m:timestamp":1848}}]'

```

Response

```
HTTP/1.1 200 Ok
Content-length: 151
Server: Tarantool http (tarantool v1.7.3-673-g23cc4dc)
Connection: keep-alive

{"meta":{"m:timestamp":1848,"normalized_id":"1_b9pkrf00mjt6h1vmqlkg.png","m:cam_id":
↪"a9f7a973-f07e-469d-a3bd-41ddd510b26f","feat":{"score":0.123}},"id":1, ... }
```

List Galleries

```
POST /v2/galleries/list
```

Returns:

JSON-encoded array with galleries with the following fields: `name`: gallery name, `faces`: number of faces in a gallery.

Example

Request

```
curl -D - -s -X POST http://localhost:8001/v2/galleries/list
```

Response

```
HTTP/1.1 200 Ok
Content-length: 42
Server: Tarantool http (tarantool v1.7.3-673-g23cc4dc)
Connection: keep-alive

{
  "results": [
    {
      "name": "testgal",
      "faces": 2
    }
  ]
}
```

Get Gallery Info

```
POST /v2/galleries/get/:name
```

Returns:

- HTTP 200 and dictionary with gallery parameters on success.
- HTTP 404 and error description if a gallery with the given name doesn't exist.
- HTTP with a status other than 200 and error description in the body on failure.

Example**Request**

```
curl -D - -s -X POST http://localhost:8001/v2/galleries/get/testgal
```

```
HTTP/1.1 200 Ok
Content-length: 11
Server: Tarantool http (tarantool v1.7.3-673-g23cc4dc)
Connection: keep-alive

{"faces":2}
```

Create Gallery

```
POST /v2/galleries/add/:name
```

Returns:

- HTTP 200 and empty body on success.
- with a status other than 200 and error description in the body on failure.

Example**Request**

```
curl -D - -X POST -s 'http://localhost:8001/v2/galleries/add/123'
```

Response

```
HTTP/1.1 409 Conflict
Content-length: 57
Server: Tarantool http (tarantool v1.7.3-673-g23cc4dc)
Connection: keep-alive

{"error":{"message":"gallery already exists","code":409}}
```

Remove Gallery

```
POST /v2/galleries/delete/:name
```

Returns:

- HTTP 200 and empty on success.
- with a status other than 200 and error description in the body on failure.

Example

Request

```
curl -D - -X POST -s 'http://localhost:8001/v2/galleries/delete/123'
```

Response

```
HTTP/1.1 204 No content
Content-length: 0
Server: Tarantool http (tarantool v1.7.3-673-g23cc4dc)
Connection: keep-alive
```

1.7.12 Person Clusterization

FindFace Security allows for automatic person recognition. In this case, the system databases will hold a new entity `person event` linked to all *episodes* that feature a person's face. You can work with the person gallery on the *Persons* tab.

Important: By default, person clusterization is disabled. *Enable and configure it* via the `findface-security` configuration file.

In this section:

- *Clusterization Methods*
- *Enable and Configure Person Clusterization*
- *Work with Person Gallery*

Clusterization Methods

FindFace Security uses the following methods to cluster faces belonging to the same person:

- **Dynamic clusterization.** The clusterization takes place on-the-fly after an episode is closed. The result of dynamic clusterization is shown in real-time on the *Persons* tab.

Note: The technical details are as follows. Not every episode is qualified: the number of events in it must be equal or greater than `PERSON_EVENT_MIN_EPISODE_EVENTS` (set up via the `findface-security` configuration file). If an episode meets this requirement, the system selects the best quality event and performs the following operations:

- Creates a new entity `PersonEvent` in the main system database **PostgreSQL**. The entity contains the event metadata, a link to the parent episode, face biometric sample, and thumbnail.
 - Searches for a similar face centroid in the `person_events` gallery of the **Tarantool** biometric database. A face centroid is a virtual biometric sample averaged across all person's faces that have been detected so far. If a similar centroid is found, the system updates it using the new event. Otherwise, it creates a new centroid.
-

- **Scheduled clusterization.** We recommend scheduling it on late night hours as it takes up a lot of CPU resources and time.

Note: The schedule is defined in the `RRULE` format as `PERSONS_CLUSTERIZATION_SCHEDULE` in the `findface-security` configuration file. The rest of the technical implementation resembles the dynamic method. However, the face centroid quality is better in the scheduled method as centroids are averaged across a larger array of accumulated biometric samples.

Important: The scheduled clusterization completely overwrites the person gallery, including ids.

Enable and Configure Person Clusterization

By default, person clusterization is disabled. To enable it, open the `findface-security` configuration file and modify the `SERVICES` section as such:

```
sudo vi /etc/ffsecurity/config.py

...
SERVICES = {
    "ffsecurity": {
        ...
        "persons": True,
    }
    ...
}
```

You will see the *Persons* tab appear in the FindFace Security web interface.

In the same configuration file, you can modify the following parameters:

- `PERSON_EVENT_MIN_QUALITY`: minimum quality of faces used in person clusterization.
- `PERSON_EVENT_MIN_EPISODE_EVENTS`: minimum number of events in episodes used in person clusterization.
- `PERSONS_CONFIDENCE_THRESHOLD`: confidence threshold to match a face to a person.

Warning: Consult with our experts by support@ntechlab.com before changing this parameter.


- PERSONS_CLUSTERIZATION_SCHEDULE: recurrence rule (RRULE) for scheduling person clusterization.

Tip: See the RRULE calculator [here](#).

```
# -- Persons configuration --
# rrule (recurrence rule) for scheduling persons clusterization
'PERSONS_CLUSTERIZATION_SCHEDULE': 'RRULE:FREQ=DAILY;INTERVAL=1;WKST=MO;BYHOUR=0;
  ↪BYMINUTE=0',
# face to person matching confidence threshold
'PERSONS_CONFIDENCE_THRESHOLD': 0.739,
# minimum face quality for handle face in person service
'PERSON_EVENT_MIN_QUALITY': -2,
```

Work with Person Gallery

To see the person gallery, navigate to the *Persons* tab.

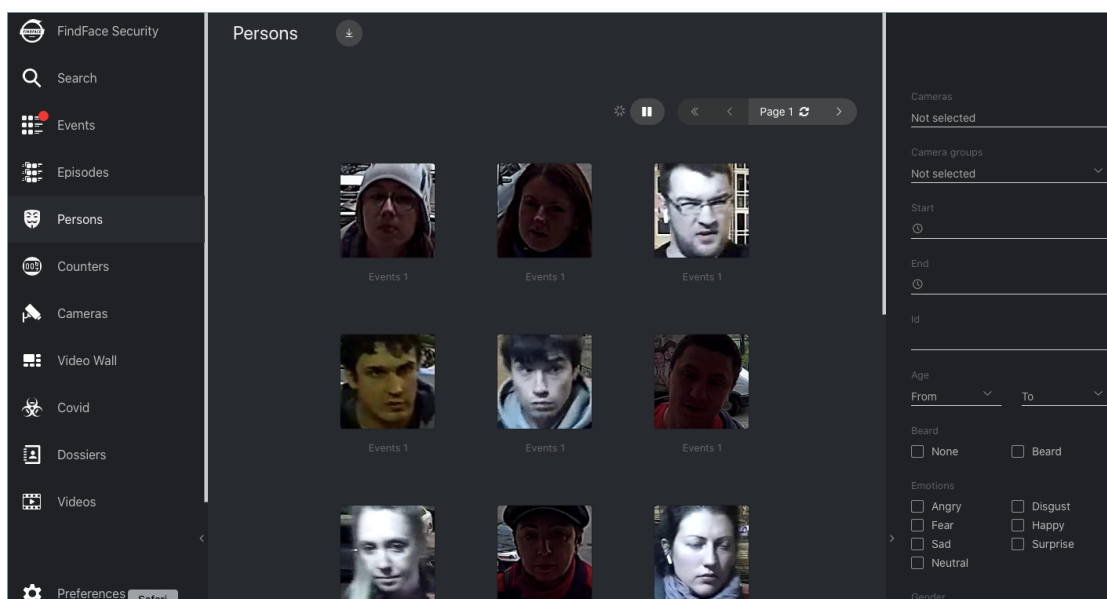


To work with the person gallery, use the following filters:

- Cameras
- Camera groups
- Time period
- Person id
- Face features (if enabled)
- Liveness (if enabled)



You can download the person gallery in the CSV format. To do so, click

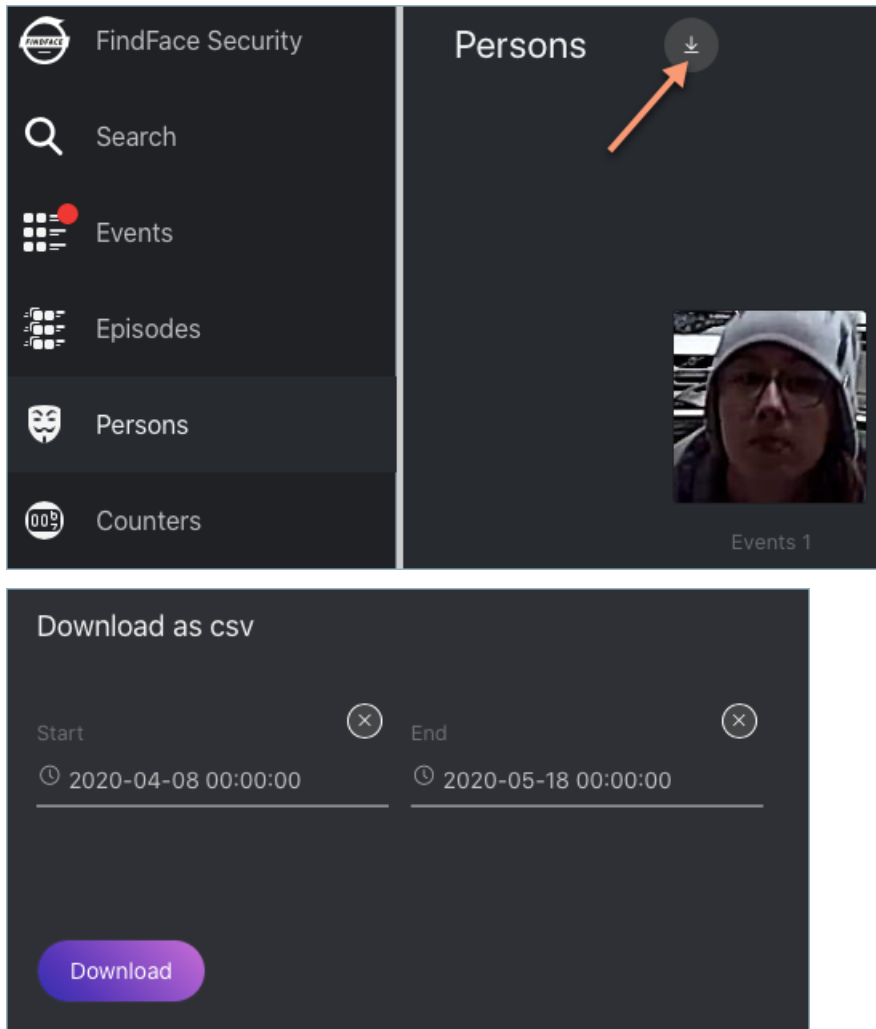

See also:

- *Configuration file of findface-security*
- *Webhooks*

1.8 Maintenance and Troubleshooting

1.8.1 Update FindFace Security to 4.2

Warning: Since version 4.1, FindFace Security utilizes a new version of Tarantool. The biometric database from previous FindFace Security versions (4.0 and earlier) is NOT COMPATIBLE with FindFace Security 4.2. Be sure to use the [Backup/Restore](#) functionality to update the product to 4.2 (see the full algorithm below).

To update FindFace Security from any previous version to 4.2, do the following:

1. Open the `findface-security` configuration file. Save the values of the following parameters for later use: `EXTERNAL_ADDRESS`, `SECRET_KEY`, `VIDEO_DETECTOR_TOKEN`, `ROUTER_URL`.

```
sudo vi /etc/ffsecurity/config.py

EXTERNAL_ADDRESS = "http://172.20.77.58"

...
# use pwgen -sncy 50 1/tr "" "." to generate your own unique key
SECRET_KEY = 'c8b533847bbf7142102de1349d33a1f6'

FFSECURITY = {
    'VIDEO_DETECTOR_TOKEN': '381b0f4a20495227d04185ab02f5085f',
    ...
    'ROUTER_URL': 'http://172.20.77.58',
    ...
}
```

2. Stop the findface-security service.

```
sudo systemctl stop findface-security*
```

3. Create a backup of the Tarantool-based biometric database in any directory of your choice, for example, /etc/findface_dump.

Tip: See *Backup and Restore Data Storages* for details.

```
mkdir -p /etc/findface_dump
cd /etc/findface_dump
sudo findface-storage-api-dump -config /etc/findface-sf-api.ini
```

4. Install the apt repository with the new FindFace Security, using the console installer as described in [this section](#).
5. Install the pgbouncer package as such:

```
sudo apt update
sudo apt install -y pgbouncer
```

6. Give a strong password to the ntech user (9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3 in the example below). Output the credentials to the pgbouncer user list.

```
echo '"ntech" "9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3"' | sudo tee -a /etc/pgbouncer/
↪userlist.txt
```

7. Configure pgbouncer. In /etc/pgbouncer/pgbouncer.ini, add ffsecurity to the databases section. Configure other parameters, as shown in the example below.

```
sudo vi /etc/pgbouncer/pgbouncer.ini
[databases]
ffsecurity = dbname=ffsecurity host=localhost port=5432 user=ntech
...
; ip address or * which means all ip-s
listen_addr = 127.0.0.1
listen_port = 5439
...
; any, trust, plain, crypt, md5
auth_type = plain
...
```

(continues on next page)

(continued from previous page)

```

; When server connection is released back to pool:
;   session      - after client disconnects
;   transaction  - after transaction finishes
;   statement    - after statement finishes
pool_mode = transaction
...
; total number of clients that can connect
max_client_conn = 16384
...
;; Syslog settings
syslog = 1
;syslog_facility = daemon
;syslog_ident = pgbouncer

```

8. Copy the password of the ntech user (9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3 in the example). In **PostgreSQL**, set the copied password for the ntech role. Open the **PostgreSQL** interactive terminal. You will see the line postgres=# appear. After the # sign, enter the following command: ALTER ROLE ntech PASSWORD '<copied password>'.

```

sudo -u postgres psql

postgres=# ALTER ROLE ntech PASSWORD '9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3';

```

9. Using the **PostgreSQL** interactive terminal, create a database ffcounter in PostgreSQL.

```

postgres=# CREATE DATABASE ffcounter WITH OWNER ntech ENCODING 'UTF-8' LC_COLLATE=
↳ 'C.UTF-8' LC_CTYPE='C.UTF-8' TEMPLATE template0;

```

10. Create and configure pgbouncer.service.

```

sudo touch /etc/systemd/system/pgbouncer.service
sudo vi /etc/systemd/system/pgbouncer.service

```

Insert the following code:

```

[Unit]
Description=Pgbouncer service
After=postgresql.service
Before=findface-security.service
[Service]
User=postgres
Group=postgres
ExecStart=/usr/sbin/pgbouncer "/etc/pgbouncer/pgbouncer.ini"
[Install]
WantedBy=multi-user.target

```

11. Enable the pgbouncer.service autostart and restart it:

```

sudo systemctl enable pgbouncer.service
sudo systemctl restart pgbouncer.service

```

12. Install the new FindFace Security services from the repository, following your architecture outline.

CPU-version:

```

sudo apt update
sudo apt install ffsecurity ffsecurity-ui findface-extraction-api findface-ntls_
↳ findface-sf-api findface-tarantool-server findface-upload findface-video-worker-cpu findface-counter
↳ manager findface-video-worker-cpu findface-counter

```

(continued from previous page)

GPU-version:

```
sudo apt update
sudo apt install ffsecurity ffsecurity-ui findface-extraction-api-gpu findface-
↪ntls findface-sf-api findface-tarantool-server findface-upload findface-video-
↪manager findface-video-worker-gpu findface-gpudetector-data findface-counter
```

Important: FindFace Security 4.2 on GPU requires the nvidia-440 and cuda 10.2 drivers. Make sure the right driver versions are installed.

Important: At some moment, you will be prompted to choose which version of the findface-security configuration file to keep. Opt for Install the packages maintainer's version.

13. Enable the findface-counter service autostart.

```
sudo systemctl enable findface-counter
```

14. Open the findface-security configuration file and paste the saved EXTERNAL_ADDRESS, SECRET_KEY, VIDEO_DETECTOR_TOKEN, and ROUTER_URL into it. Fill in the DATABASES section by analogy: 'PORT': 5439, 'USER': 'ntech', 'PASSWORD': '9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3' (password from /etc/pgbouncer/userlist.txt).

```
sudo vi /etc/ffsecurity/config.py
...
# Database is used by FindFace Security to store cameras,
# camera groups, watchlists and so on. Only PostgreSQL is supported.
DATABASES = {
    'default': {
        'ENGINE': 'django.db.backends.postgresql',
        'DISABLE_SERVER_SIDE_CURSORS': True,
        'NAME': 'ffsecurity',
        'PORT': 5439, 'USER': 'ntech', 'PASSWORD':
↪'9T3g1nXy9yx3y8MIGm9fbef3dia8UTc3',
    }
}
...
# Use pwgen -sncy 50 1/tr "" "." to generate your own unique key
SECRET_KEY = '002231ccb690586f4d33e98322c591bb'
...
SERVICE_EXTERNAL_ADDRESS = 'http://172.20.77.58'
# EXTERNAL_ADDRESS is used to access objects created inside FFSecurity via_
↪external links.
EXTERNAL_ADDRESS = 'http://172.20.77.58'
...
# findface-video-worker authorization token
'VIDEO_DETECTOR_TOKEN': '8977e1b0067d43f6c908d0bf60363255',
...
# findface-video-worker face posting address,
# it must be set to either FFSecurity EXTERNAL_ADDRESS (by default)
# or findface-facerouter url (in some specific cases)
'ROUTER_URL': 'http://127.0.0.1:80',
```

15. Modify the Tarantool database structure by applying the `tnt_schema.lua` file from the new version.

```
sudo findface-security make_tnt_schema | sudo tee /etc/ffsecurity/tnt_schema.lua
```

16. Stop the `findface-tarantool-server` shards. Purge data from all the directories relevant to active shards.

```
sudo systemctl stop 'tarantool@*'

sudo rm /opt/ntech/var/lib/tarantool/shard-*/{index,snapshots,xlogs}/*
```

17. Navigate to the directory with Tarantool configuration file(s) `/etc/tarantool/instances.enabled/`. To each configuration file `*.lua`, add the `meta_indexes` definition, as shown in the example below.

```
sudo vi /etc/tarantool/instances.enabled/*.lua

FindFace.start("127.0.0.1", 8001, {
    license_ntls_server="127.0.0.1:3133",
    meta_indexes=meta_indexes,
    meta_scheme = meta_scheme
})
```

18. Restart the `findface-tarantool-server` shards.

```
TNT=$(ls /etc/tarantool/instances.enabled/ | cut -c 7,8,9)
for i in $TNT; do sudo systemctl restart tarantool@shard-$i.service ; done
```

19. Restore the Tarantool database from the backup.

```
cd /etc/findface_dump

for x in *.json; do sudo findface-storage-api-restore -config /etc/findface-sf-
↪api.ini < "$x"; done
```

20. Restart the services.

```
sudo systemctl restart findface-security.service
sudo systemctl restart findface-ntls findface-extraction-api findface-video-
↪worker* findface-video-manager findface-sf-api findface-counter
```

21. Migrate the main database architecture from FindFace Security to **PostgreSQL**, re-create user groups with *predefined* rights and the first user with administrator rights.

```
sudo findface-security migrate
sudo findface-security create_groups
sudo findface-security create_default_user
```

22. Restart **PostgreSQL**.

On Ubuntu 16.04:

```
sudo systemctl restart postgresql@9.5-main.service
```

On Ubuntu 18.04:

```
sudo systemctl restart postgresql@10-main.service
```

1.8.2 Backup and Restore Data Storages

This section is all about backup and restore of the FindFace Security data storages, which are the following:

- Tarantool-based biometric database that stores biometric samples (feature vectors) and face identification events.
- Main system database based on PostgreSQL, that stores internal system data, dossiers, user accounts, and camera settings.
- Directory `/var/lib/ffsecurity/uploads` that stores uploaded dossier photos, video files, and such event artifacts as full frames, face thumbnails, and normalized face images.
- Directory `/var/lib/ffupload/` that stores only such event artifacts as face thumbnails.

In this section:

- *Biometric Database Backup and Restore*
 - *Utilities*
 - *Backup Database*
 - *Restore Database*
- *Main Database Backup and Restore*
- *Artifacts Backup*

Biometric Database Backup and Restore

There are 3 galleries in the Tarantool-based biometric database:

- `ffsec_dossier_face`: biometric samples extracted from dossier photos.
- `ffsec_events`: biometric samples extracted from faces detected in the video.
- `ffsec_persons`: centroids of persons (virtual biometric samples averaged across all person's faces) and metadata.

The database backup/restore functionality allows you to fully restore all the galleries when needed.

To avoid data loss, we recommend you to create a biometric database backup at least once a week. Overall, the frequency of backups depends on the number of dossiers and face recognition events, as well as available disk space.

Be sure to backup the database before *migrating* your system to another biometric model.

Utilities

To backup and restore the FindFace Security biometric database, the following utilities are needed:

1. backup: findface-storage-api-dump,
2. restore: findface-storage-api-restore.

These utilities are automatically installed along with findface-sf-api.

Backup Database

To backup the biometric database, use the findface-storage-api-dump utility as follows:

Important: The following services have to be active: findface-tarantool-server, findface-sf-api.

Note: The backup functionality can be applied to a distributed database. In this case, the findface-storage-api-dump utility will backup galleries on all the shards specified in /etc/findface-sf-api.ini.

1. On the server with findface-sf-api, create a directory to store the backup files (/etc/findface_dump in the example below).
2. Launch the findface-storage-api-dump utility by executing:

```
sudo findface-storage-api-dump -output-dir=/etc/findface_dump -config /etc/
↳ findface-sf-api.ini
```

The utility will backup at once all the galleries into the files with corresponding names ffsec_dossier_face.json, ffsec_events.json, ffsec_monitoring.json, and save them into the directory. These files contain all the data needed to restore the entire database.

Restore Database

To restore the biometric database from the backup, do the following:

1. Use HTTP API to create initial galleries in the database: ffsec_dossier_face, ffsec_events, ffsec_monitoring.

Tip: See [HTTP API](#).

```
curl -D - -X POST -s 'http://localhost:8101/v2/galleries/add/ffsec_dossier_face'
curl -D - -X POST -s 'http://localhost:8101/v2/galleries/add/ffsec_events'
curl -D - -X POST -s 'http://localhost:8101/v2/galleries/add/ffsec_monitoring'
```

2. Launch the findface-storage-api-restore utility for all the files in the backup folder:

```
sudo findface-storage-api-restore -config /etc/findface-sf-api.ini /etc/findface_
↳ dump/*.json
```

The restore process can be interrupted and resumed when necessary. To resume the process after interruption, simply launch the findface-storage-api-restore utility again.

See also:

- [Backup Options](#)

- *Restore Options*

Main Database Backup and Restore

To backup the PostgreSQL database, execute:

```
sudo -u postgres pg_dump ffsecurity > ffsecurity_postgres_backup.sql
```

To restore the PostgreSQL database, execute:

```
psql -d ffsecurity -f ffsecurity_postgres_backup.sql
```

Artifacts Backup

The FindFace Security artifacts, such as uploaded dossier photos, video files, and such event artifacts as full frames, face thumbnails, and normalized face images, are stored in the following directories:

- /var/lib/ffsecurity/uploads
- /var/lib/ffupload/

To backup the artifacts, execute:

```
tar -cvzf var_lib_ffsecurity_uploads.tar.gz /var/lib/ffsecurity/uploads  
tar -cvzf var_lib_ffupload.tar.gz /var/lib/ffupload/
```

1.8.3 Migrate to Different Facen Model

Tip: Do not hesitate to contact our experts on migration by support@ntechlab.com.

Important: Before the migration, be sure to *backup* the database.

Sometimes you have to migrate your face biometric data (facens) to another facen model. This usually happens when you decide to update to the latest version of the product.

To migrate to a different facen model, use the `findface-sf-api-migrate` utility. To pass migration settings, launch it with the `-config` option and provide a configuration file shown in the example below.

```
findface-sf-api-migrate -config <migration.ini>
```

Example of the configuration file:

```
extraction-api:  
  timeouts:  
    connect: 5s  
    response_header: 30s  
    overall: 35s  
    idle_connection: 0s  
  extraction-api: http://127.0.0.1:18666  
storage-api-from: # current location of the gallery  
  timeouts:
```

(continues on next page)

(continued from previous page)

```

    connect: 5s
    response_header: 30s
    overall: 35s
    idle_connection: 10s
    max-idle-conns-per-host: 20
    shards:
      - master: http://127.0.0.1:8001/v2/
        slave: ""
  storage-api-to:
    timeouts:
      connect: 5s
      response_header: 30s
      overall: 35s
      idle_connection: 10s
    max-idle-conns-per-host: 20
    shards:
      - master: http://127.0.0.1:8002/v2/
        slave: ""
  workers_num: 3
  faces_limit: 100
  extraction_batch_size: 8
  normalized_storage:
    type: webdav
    enabled: True
    webdav:
      upload-url: http://127.0.0.1:3333/uploads/
  s3:
    endpoint: 172.20.77.75:9000
    bucket-name: sf-api-normalized
    access-key: W0G6EQT6MC3BZC8136DW
    secret-access-key: XnottrdxRFp70wfEGdkvKgkzKZ3mEa2Y9bYmob4I
    secure: False
    region: ""
    operation-timeout: 10
    public-url: 123

```

Parameter		Description
extraction-api	->	findface-extraction-api with a new facen model in its configuration file.
extraction-api		
storage-api-from		Previous facen storage
storage-api-to		Storage for re-generated facens
normalized_storage	->	Storage of normalized face images.
upload-url		

1.8.4 Modify Biometric Database Structure

Sometimes it may be necessary to apply a new structural schema to your Tarantool-based biometric database, for example, when updating to the latest version of the product, or when you want to enhance the default database structure with additional parameters, advanced face metadata, and so on.

In this section:

- *About Database Structure*
- *Structure Modification*

About Database Structure

In FindFace Security, the database structure is set via the `/etc/ffsecurity/tnt_schema.lua` file.

The structure is created as a set of fields. Each field is described with the following parameters:

- `id`: field id;
- `name`: field name, must be the same as the name of a relevant face parameter;
- `field_type`: data type;
- `default`: field default value. If a default value exceeds '1e14 - 1', use a string data type to specify it, for example, "123123..." instead of 123123...

You can find the default `tnt_schema.lua` file below:

```
meta_scheme = {
  -- internal.normalized_id:
  {
    default = '',
    field_type = 'string',
    id = 1,
    name = 'normalized_id',
  },
  -- internal.feat:
  {
    default = '',
    field_type = 'string',
    id = 2,
    name = 'feat',
  },
  -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:acknowledged:
  {
    default = 0,
    field_type = 'unsigned',
    id = 3,
    name = 'm:acknowledged',
  },
  -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:acknowledged_by:
  {
    default = 0,
    field_type = 'unsigned',
    id = 4,
    name = 'm:acknowledged_by',
  },
  -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:acknowledged_date:
  {
    default = 0,
    field_type = 'unsigned',
    id = 5,
    name = 'm:acknowledged_date',
  },
  -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:acknowledged_
```

→ reaction:

(continues on next page)

(continued from previous page)

```

{
  default = '',
  field_type = 'string',
  id = 6,
  name = 'm:acknowledged_reaction',
},
-- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:camera:
{
  default = 0,
  field_type = 'unsigned',
  id = 7,
  name = 'm:camera',
},
-- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:camera_group:
{
  default = 0,
  field_type = 'unsigned',
  id = 8,
  name = 'm:camera_group',
},
-- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:confidence:
{
  default = "10000000000000000000",
  field_type = 'unsigned',
  id = 9,
  name = 'm:confidence',
},
-- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:created_date:
{
  default = 0,
  field_type = 'unsigned',
  id = 10,
  name = 'm:created_date',
},
-- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:episode:
{
  default = 0,
  field_type = 'unsigned',
  id = 11,
  name = 'm:episode',
},
-- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:episode_open:
{
  default = 0,
  field_type = 'unsigned',
  id = 12,
  name = 'm:episode_open',
},
-- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_age:
{
  default = "10000000000000000000",
  field_type = 'unsigned',
  id = 13,
  name = 'm:f_age',
},
-- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_beard_class:
{

```

(continues on next page)

(continued from previous page)

```

        default = '',
        field_type = 'string',
        id = 14,
        name = 'm:f_beard_class',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_beard_score:
    {
        default = "10000000000000000000",
        field_type = 'unsigned',
        id = 15,
        name = 'm:f_beard_score',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_emotions_class:
    {
        default = '',
        field_type = 'string',
        id = 16,
        name = 'm:f_emotions_class',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_emotions_score:
    {
        default = "10000000000000000000",
        field_type = 'unsigned',
        id = 17,
        name = 'm:f_emotions_score',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_gender_class:
    {
        default = '',
        field_type = 'string',
        id = 18,
        name = 'm:f_gender_class',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_gender_score:
    {
        default = "10000000000000000000",
        field_type = 'unsigned',
        id = 19,
        name = 'm:f_gender_score',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_glasses_class:
    {
        default = '',
        field_type = 'string',
        id = 20,
        name = 'm:f_glasses_class',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_glasses_score:
    {
        default = "10000000000000000000",
        field_type = 'unsigned',
        id = 21,
        name = 'm:f_glasses_score',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_liveness_class:
    {
        default = '',

```

(continues on next page)

(continued from previous page)

```

        field_type = 'string',
        id = 22,
        name = 'm:f_liveness_class',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_liveness_score:
    {
        default = "10000000000000000000",
        field_type = 'unsigned',
        id = 23,
        name = 'm:f_liveness_score',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_medmask_class:
    {
        default = '',
        field_type = 'string',
        id = 24,
        name = 'm:f_medmask_class',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_medmask_score:
    {
        default = "10000000000000000000",
        field_type = 'unsigned',
        id = 25,
        name = 'm:f_medmask_score',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_race_class:
    {
        default = '',
        field_type = 'string',
        id = 26,
        name = 'm:f_race_class',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:f_race_score:
    {
        default = "10000000000000000000",
        field_type = 'unsigned',
        id = 27,
        name = 'm:f_race_score',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:thumbnail:
    {
        default = '',
        field_type = 'string',
        id = 28,
        name = 'm:thumbnail',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:frame:
    {
        default = '',
        field_type = 'string',
        id = 29,
        name = 'm:frame',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:frame_coords_bottom:
    {
        default = 0,
        field_type = 'unsigned',

```

(continues on next page)

(continued from previous page)

```

        id = 30,
        name = 'm:frame_coords_bottom',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:frame_coords_left:
    {
        default = 0,
        field_type = 'unsigned',
        id = 31,
        name = 'm:frame_coords_left',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:frame_coords_right:
    {
        default = 0,
        field_type = 'unsigned',
        id = 32,
        name = 'm:frame_coords_right',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:frame_coords_top:
    {
        default = 0,
        field_type = 'unsigned',
        id = 33,
        name = 'm:frame_coords_top',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:pk:
    {
        default = 0,
        field_type = 'unsigned',
        id = 34,
        name = 'm:pk',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:matched:
    {
        default = 0,
        field_type = 'unsigned',
        id = 35,
        name = 'm:matched',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:matched_dossier:
    {
        default = 0,
        field_type = 'unsigned',
        id = 36,
        name = 'm:matched_dossier',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:matched_face:
    {
        default = 0,
        field_type = 'unsigned',
        id = 37,
        name = 'm:matched_face',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:matched_lists:
    {
        default = {},
        field_type = 'set[unsigned]',
        id = 38,

```

(continues on next page)

(continued from previous page)

```

        name = 'm:matched_lists',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:normalized_photo:
    {
        default = '',
        field_type = 'string',
        id = 39,
        name = 'm:normalized_photo',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:quality:
    {
        default = "10000000000000000000",
        field_type = 'unsigned',
        id = 40,
        name = 'm:quality',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:scores:
    {
        default = '',
        field_type = 'string',
        id = 41,
        name = 'm:scores',
    },
    -- <class 'ffsecurity.entities_tnt.event.models.ListEvent'>.m:video_source:
    {
        default = 0,
        field_type = 'unsigned',
        id = 42,
        name = 'm:video_source',
    },
    -- <class 'ffsecurity.entities_tnt.dossier_face.models.DossierFace'>.m:dossier:
    {
        default = 0,
        field_type = 'unsigned',
        id = 43,
        name = 'm:dossier',
    },
    -- <class 'ffsecurity.entities_tnt.dossier_face.models.DossierFace'>.m:modified_
↪date:
    {
        default = 0,
        field_type = 'unsigned',
        id = 44,
        name = 'm:modified_date',
    },
    -- <class 'ffsecurity.entities_tnt.dossier_face.models.DossierFace'>.m:source_
↪photo:
    {
        default = '',
        field_type = 'string',
        id = 45,
        name = 'm:source_photo',
    },
    -- <class 'ffsecurity.entities_tnt.dossier_face.models.DossierFace'>.m:source_
↪photo_name:
    {
        default = '',

```

(continues on next page)

(continued from previous page)

```

        field_type = 'string',
        id = 46,
        name = 'm:source_photo_name',
    },
}
-- Fields referenced by multiple models: m:frame_coords_left, m:frame_coords_right,
↳ m:frame_coords_top, m:pk, m:created_date, m:frame_coords_bottom, m:thumbnail
meta_indexes = {'m:episode', 'm:episode_open'}

```

Structure Modification

To modify the database structure, do the following:

1. Stop the findface-security service.

```
sudo systemctl stop findface-security.service
```

2. Create a backup of the Tarantool-based biometric database in any directory of your choice, for example, /tmp/dump.

Tip: See *Backup and Restore Data Storages* for details.

```

mkdir -p /tmp/dump
cd /tmp/dump
sudo findface-storage-api-dump -config /etc/findface-sf-api.ini

```

3. Prepare the `tnt_schema.lua` file containing the new database structure.
4. Modify the database structure by applying the new `tnt_schema.lua` file.

```
sudo findface-security make_tnt_schema | sudo tee /etc/ffsecurity/tnt_schema.lua
```

5. Open the Tarantool configuration file. Make sure that there is a line `dofile("/etc/ffsecurity/tnt_schema.lua")` before the `FindFace.start` section and `meta_scheme=meta_scheme` is defined in the `FindFace.start` parameters.

```

sudo vi /etc/tarantool/instances.enabled/<shard_00N>.lua

dofile("/etc/ffsecurity/tnt_schema.lua")

FindFace.start("127.0.0.1", 8101, {
    license_ntls_server="127.0.0.1:3133",
    meta_scheme = meta_scheme
})

```

6. Remove the Tarantool database (default database or shards).

```

sudo rm -f /opt/ntech/var/lib/tarantool/default/{index,snapshots,xlogs}/*

sudo rm -f /opt/ntech/var/lib/tarantool/shard-001/{index,snapshots,xlogs}/*
...
sudo rm -f /opt/ntech/var/lib/tarantool/shard-00N/{index,snapshots,xlogs}/*

```

7. Restore the Tarantool database from the backup.

Important: If some fields were removed from the new database structure, you have to first manually delete the corresponding data from the backup copy.

```
cd /tmp/dump
for x in *.json; do curl -X POST "http://127.0.0.1:18411/v2/galleries/${x%%.json}
↪"; done
for x in *.json; do sudo findface-storage-api-restore -config /etc/findface-sf-
↪api.ini < "$x"; done
```

8. Start the `findface-security` service.

```
sudo systemctl start findface-security.service
```

1.8.5 Remove FindFace Security Instance

You can automatically remove FindFace Security along with the database by using the `ffsec_uninstall.sh` script. The FindFace Security configuration files and database will be backed up.

Do the following:

1. Download the `ffsec_uninstall.sh` script to some directory on a designated host (for example, to `/home/username/`).
2. From this directory, make the script executable.

```
chmod +x ffsec_uninstall.sh
```

3. Run the script.

```
sudo ./ffsec_uninstall.sh
```

4. Answer **all** to completely remove FindFace Security along with the database.

1.8.6 Check Component Status

Check the status of components once you have encountered a system problem.

Component	Command to view service status
<code>findface-extraction-api</code>	<code>sudo systemctl status findface-extraction-api.service</code>
<code>findface-sf-api</code>	<code>sudo systemctl status findface-sf-api.service</code>
<code>findface-tarantool-server</code>	<code>sudo systemctl status tarantool@FindFace.service</code>
<code>findface-video-manager</code>	<code>sudo systemctl status findface-video-manager.service</code>
<code>findface-video-worker</code>	<code>sudo systemctl status findface-video-worker*.service</code>
<code>findface-ntls</code>	<code>sudo systemctl status findface-ntls</code>
<code>findface-security</code>	<code>sudo systemctl status findface-security*</code>
<code>etcd</code>	<code>sudo systemctl status etcd.service</code>
<code>NginX</code>	<code>sudo systemctl status nginx.service</code>
<code>memcached</code>	<code>sudo systemctl status memcached.service</code>
<code>postgresql</code>	<code>sudo systemctl status postgresql*</code>
<code>redis</code>	<code>sudo systemctl status redis.service</code>

1.8.7 Logs

Log files provide a complete record of each FindFace Security component activity. Consulting logs is one of the first things you should do to identify a cause for any system problem.

Component	Command to view log
findface-extraction-api	<code>sudo tail -f /var/log/syslog grep extraction-api</code>
findface-sf-api	<code>sudo tail -f /var/log/syslog grep sf-api</code>
findface-tarantool-server	<code>sudo tail -f /var/log/tarantool/FindFace.log</code>
findface-video-manager	<code>sudo tail -f /var/log/syslog grep video-manager</code>
findface-video-worker	<code>sudo tail -f /var/log/syslog grep video-worker</code>
findface-security	<code>sudo tail -f /var/log/syslog grep findface-security</code>
findface-ntls	<code>sudo tail -f /var/log/syslog grep ntls</code>
findface-security	<code>sudo tail -f /var/log/syslog grep security</code>
etcd	<code>sudo tail -f /var/log/syslog grep etcd</code>

You can also consult audit log for each component. To do so, use the `journalctl -u <component>` command, for example:

```
journalctl -u findface-extraction-api
```

Important: In order to enable saving audit logs to your hard drive, uncomment and edit the `Storage` parameter in the `/etc/systemd/journald.conf` file:

```
sudo vi /etc/systemd/journald.conf
...
[Journal]
Storage=persistent
```

If necessary, uncomment and edit the `SystemMaxUse` parameter as well. This parameter determines the maximum volume of log files on your hard drive (10% by default).

```
SystemMaxUse=15
```

To view the FindFace Security audit logs, execute the following command:

```
journalctl -o verbose SYSLOG_IDENTIFIER=ffsecurity
```

When interpreting audit logs, first of all pay attention on the following parameters:

- `REQUEST_USER`: user who made the changes;
- `REQUEST_PATH`: URL of the request;
- `REQUEST_DATA`: detailed information of the request.

In the log below, the admin user creates a dossier `id=1879`:

```
Fr 2017-12-22 17:53:32.436258 MSK [s=0b5566699751426983e13241301205e9;i=e26015;
→b=907c34cc1fde4398af63bb575587d9ba;m=246f620c449;t=560eefaf59bc5;x=ed60a136c8fc6362]
  _PRIORITY=6
  _UID=123
  _GID=130
  _CAP_EFFECTIVE=0
```

(continues on next page)

(continued from previous page)

```

_BOOT_ID=907c34cc1fde4398af63bb575587d9ba
_MACHINE_ID=a3eea61c03e041ef8e64d5c72f5fce40
_HOSTNAME=ntechadmin
SYSLOG_IDENTIFIER=ffsecurity
_THREAD_NAME=MainThread
_TRANSPORT=journal
_PID=6579
_COMM=findface-securi
_EXE=/opt/ffsecurity/bin/python3
_CMDLINE=/opt/ffsecurity/bin/python /opt/ffsecurity/bin/findface-security runworker
_SYSTEMD_CGROUP=/system.slice/system-findface\x2dsecurity\x2dworker.slice/findface-
↪security-worker@4.service
_SYSTEMD_UNIT=findface-security-worker@4.service
_SYSTEMD_SLICE=system-findface\x2dsecurity\x2dworker.slice
CODE_FILE=/opt/ffsecurity/lib/python3.5/site-packages/ffsecurity/mixins.py
CODE_LINE=94
CODE_FUNC=finalize_response
REQUEST_USER=admin
LOGGER=ffsecurity.audit
MESSAGE=N8Be05il POST /dossier-faces/ 201 by admin
REQUEST_DATA={"dossier": "'1879'", "source_photo": "<InMemoryUploadedFile:␣
↪14927016033292449.jpeg (image/jpeg)>"}
REQUEST_PATH=/dossier-faces/
REQUEST_ID=N8Be05il
_SOURCE_REALTIME_TIMESTAMP=1513954412436258

```

In the next log, the list of faces is requested for the dossier id=1879:

```

Fr 2017-12-22 17:53:32.475467 MSK [s=0b5566699751426983e13241301205e9;i=e26016;
↪b=907c34cc1fde4398af63bb575587d9ba;m=246f6215d82;t=560eefaf634fe;x=b1374a144a46b5cd]
PRIORITY=6
_UID=123
_GID=130
_CAP_EFFECTIVE=0
_BOOT_ID=907c34cc1fde4398af63bb575587d9ba
_MACHINE_ID=a3eea61c03e041ef8e64d5c72f5fce40
_HOSTNAME=ntechadmin
SYSLOG_IDENTIFIER=ffsecurity
_THREAD_NAME=MainThread
_TRANSPORT=journal
_COMM=findface-securi
_EXE=/opt/ffsecurity/bin/python3
_CMDLINE=/opt/ffsecurity/bin/python /opt/ffsecurity/bin/findface-security runworker
_SYSTEMD_SLICE=system-findface\x2dsecurity\x2dworker.slice
_PID=6588
_SYSTEMD_CGROUP=/system.slice/system-findface\x2dsecurity\x2dworker.slice/findface-
↪security-worker@2.service
_SYSTEMD_UNIT=findface-security-worker@2.service
CODE_FILE=/opt/ffsecurity/lib/python3.5/site-packages/ffsecurity/mixins.py
CODE_LINE=94
CODE_FUNC=finalize_response
REQUEST_USER=admin
REQUEST_DATA={}
LOGGER=ffsecurity.audit
MESSAGE=Dee7Qvy4 GET /dossier-faces/?dossier=1879&limit=1000 200 by admin
REQUEST_ID=Dee7Qvy4
REQUEST_PATH=/dossier-faces/?dossier=1879&limit=1000

```

(continues on next page)


(continued from previous page)

```
_SOURCE_REALTIME_TIMESTAMP=1513954412475467
```

1.8.8 Licensing

View and Update License

To view your current licensing information or upload a new license file, navigate to *Preferences -> License*.

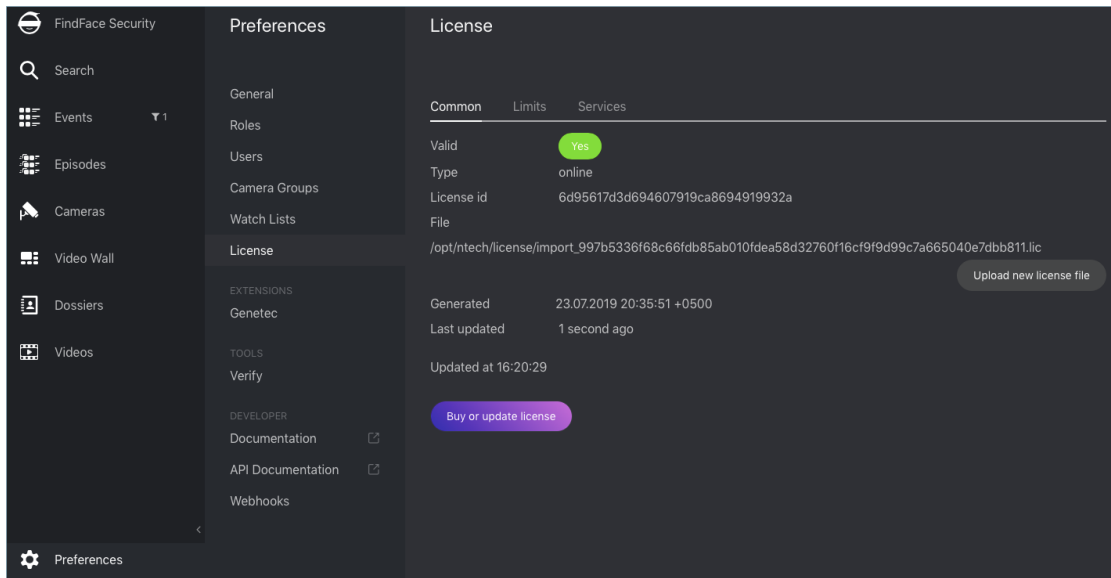

Troubleshoot Licensing and findface-ntls

When troubleshooting licensing and findface-ntls (see *Licensing Principles*), the first step is to retrieve the licensing information and findface-ntls status. You can do so by sending an API request to findface-ntls. Necessary actions are then to be undertaken, subject to the response content.

Tip: Please do not hesitate to contact our experts on troubleshooting by support@ntechlab.com.

Note: The online licensing is done via the NtechLab Global License Manager `license.ntechlab.com`. Check its availability. A stable internet connection and DNS are required.

To retrieve the FindFace Security *licensing* information and findface-ntls status, execute on the findface-ntls host console:

```
curl http://localhost:3185/license.json -s | jq
```

The response will be given in JSON. One of the most significant parameters is `last_updated`. It indicates in seconds how long ago the local license has been checked for the last time.

Interpret the `last_updated` value as follows:

- [0, 5] — everything is alright.
- (5, 30] — there may be some problems with connection, or with the local drive where the license file is stored.
- (30; 120] — almost certainly something bad happened.
- (120; ∞) — the licensing source response has been timed out. Take action.
- "valid": false: connection with the licensing source was never established.

```
curl http://localhost:3185/license.json -s | jq
{
  "name": "NTLS",
  "time": 1565186356,
  "type": "online",
  "license_id": "61063ce4b86945e1b70c3bdbedea453b",
  "generated": 1514467939,
  "last_updated": 5,
  "valid": {
    "value": true,
    "description": ""
  },
  "source": "/opt/ntech/license/import_
→ b68d7b7ec9a7310d18832035318cff0c9ddf11e3a9ab0ae962fbe48645e196d1.lic",
  "limits": [
    {
      "type": "time",
      "name": "end",
      "value": 1609161621
    },
    {
      "type": "number",
      "name": "faces",
      "value": 9007199254740991,
      "current": 0
    },
    {
      "type": "number",
      "name": "cameras",
      "value": 4294967295,
      "current": 0
    },
    {
      "type": "number",
      "name": "extraction_api",
      "value": 256,
      "current": 0
    },
    {
      "type": "boolean",
      "name": "gender",
      "value": true
    },
    {
      "type": "boolean",
      "name": "age",
      "value": true
    },
    {

```

(continues on next page)

(continued from previous page)

```
    "type": "boolean",
    "name": "emotions",
    "value": true
  },
  {
    "type": "boolean",
    "name": "fast-index",
    "value": true
  },
  {
    "type": "boolean",
    "name": "sec-genetec",
    "value": false
  },
  {
    "type": "boolean",
    "name": "countries",
    "value": false
  },
  {
    "type": "boolean",
    "name": "beard",
    "value": false
  },
  {
    "type": "boolean",
    "name": "glasses",
    "value": false
  },
  {
    "type": "boolean",
    "name": "liveness",
    "value": false
  }
],
"services": [
  {
    "name": "video-worker",
    "ip": "127.0.0.1:53276"
  },
  {
    "name": "FindFace-tarantool",
    "ip": "127.0.0.1:53284"
  },
  {
    "name": "FindFace-tarantool",
    "ip": "127.0.0.1:53288"
  }
]
}
```

1.8.9 Automatic Tarantool Recovery

If your system architecture doesn't imply uninterrupted availability of Tarantool servers, it is recommended to enable automatic database recovery. In this case, each time an error occurs while reading a snapshot or xlog file, Tarantool

will skip invalid records, read as much data as possible, and re-build the file.

To enable automatic database recovery, do the following:

1. Open the Tarantool configuration file.

```
sudo vi /etc/tarantool/instances.enabled/FindFace.lua
```

2. Uncomment `force_recovery = true`.

```
box.cfg{
    force_recovery = true,
}
```

1.8.10 Manually Purge Old Events and Episodes from Database

Tip: To schedule automatic events and episodes cleanup, see [Automatic Event And Episode Cleanup](#).

To manually remove old events and related episodes from the FindFace Security database, use the `cleanup_events` utility. You can opt for removing only matched or unmatched events, as well as only full frames.

To invoke the `cleanup_events` help message, execute:

```
sudo findface-security cleanup_events --help
usage: findface-security cleanup_events [-h] [--matched-age MATCHED_AGE]
                                         [--unmatched-age UNMATCHED_AGE]
                                         [--fullframe-matched-age FULLFRAME_MATCHED_AGE]
                                         [--fullframe-unmatched-age FULLFRAME_UNMATCHED_AGE]
                                         [--version] [-v {0,1,2,3}]
                                         [--settings SETTINGS]
                                         [--pythonpath PYTHONPATH]
                                         [--traceback] [--no-color]

Delete old events
optional arguments:
-h, --help            show this help message and exit
--matched-age MATCHED_AGE
                      Minimum age in days of matched events to clean up
--unmatched-age UNMATCHED_AGE
                      Minimum age in days of unmatched events to clean up
--fullframe-matched-age FULLFRAME_MATCHED_AGE
                      Minimum age in days of matched events fullframes to
                      clean up
--fullframe-unmatched-age FULLFRAME_UNMATCHED_AGE
                      Minimum age in days of unmatched events fullframes to
                      clean up
--version            show program's version number and exit
-v {0,1,2,3}, --verbosity {0,1,2,3}
                      Verbosity level; 0=minimal output, 1=normal output,
                      2=verbose output, 3=very verbose output
--settings SETTINGS The Python path to a settings module, e.g.
                      "myproject.settings.main". If this isn't provided, the
                      DJANGO_SETTINGS_MODULE environment variable will be
                      used.
--pythonpath PYTHONPATH
```

(continues on next page)

(continued from previous page)

```
A directory to add to the Python path, e.g.  
"/home/djangoprojects/myproject".  
--traceback      Raise on CommandError exceptions  
--no-color       Don't colorize the command output.
```

To entirely remove events and episodes older than a given number of days, use the `--matched-age/--unmatched-age` options. For example, to remove unmatched events and episodes older than 5 days, execute:

```
sudo findface-security cleanup_events --unmatched-age 5
```

To remove only matched events and episodes older than 5 days, execute:

```
sudo findface-security cleanup_events --matched-age 5
```

The following commands remove only full frames of matched/unmatched events:

```
sudo findface-security cleanup_events --fullframe-matched-age 5  
sudo findface-security cleanup_events --fullframe-unmatched-age 5
```

Important: You must provide at least one of the arguments `--matched-age/--unmatched-age/--fullframe-matched-age/--fullframe-unmatched-age`.

1.8.11 Disable Services

You can disable the following FindFace Security services should you no longer need them:

- Episodes
- Webhooks
- Persons

To do so, open the `findface-security` configuration file and modify the `SERVICES` section.

```
sudo vi /etc/ffsecurity/config.py  
  
# disable unused services to increase  
# overall system performance in some cases.  
SERVICES = {  
    "ffsecurity": {  
        "episodes": False,  
        "webhooks": False,  
        "persons": False,  
    }  
}
```

After that, the corresponding tabs will disappear from the web interface.

Note: A tab will remain if there are some entities on it (for example, webhooks on the *Webhooks* tab). However, new artifacts will cease to arrive.

1.9 Appendices

1.9.1 Enable Data Encryption

To ensure data security, it is recommended to enable SSL encryption. Do the following:

Important: We do not recommend to use a self-signed certificate.

1. Under the nginx configuration directory, create a directory that will be used to hold all of the SSL data:

```
sudo mkdir /etc/nginx/ssl
```

2. Create the SSL key and certificate files:

```
sudo openssl req -x509 -nodes -days 365 -newkey rsa:2048 -keyout /etc/nginx/ssl/  
my-example-domain.com.key -out /etc/nginx/ssl/my-example-domain.com.crt
```

You will be asked a few questions about your server in order to embed the information correctly in the certificate. Fill out the prompts appropriately. The most important line is the one that requests the Common Name. You need to enter the domain name or public IP address that you want to be associated with your server. Both of the files you created (my-example-domain.com.key and my-example-domain.com.crt) will be placed in the /etc/nginx/ssl directory.

3. Configure nginx to use SSL. Open the nginx configuration file /etc/nginx/sites-available/ffsecurity-nginx.conf. Apply the following modifications to the file:

1. Add the new server { ... } section that contains the URL replacement rule:

```
server {  
    listen 80;  
    server_name domain.ru www.domain.ru;  
    rewrite ^(.*) https://domain.ru$1 permanent;  
    access_log off;  
}
```

2. Comment out the following lines in the existing server { ... } section:

```
# listen 80 default_server;  
# listen [::]:80 default_server;
```

3. Add the following lines, including the paths to the certificate and the key, to the existing server { ... } section:

```
listen 443 ssl;  
  
ssl_certificate      /etc/NGINX/ssl/domain.crt;  
ssl_certificate_key  /etc/nginx/ssl/domain.key;
```

4. In the generic nginx configuration file /etc/nginx/nginx.conf, find the SSL Settings section and append the following lines:

```
ssl_session_cache    shared:SSL:10m;  
ssl_session_timeout  1h;
```

The example of the configuration file /etc/nginx/sites-available/ffsecurity-nginx.conf with correctly configured SSL settings is shown below:

```

upstream ffsecurity {
    server 127.0.0.1:8002;
}

upstream ffsecurity-ws {
    server 127.0.0.1:8003;
}

map $http_upgrade $ffsec_upstream {
    default "http://ffsecurity-ws";
    "" "http://ffsecurity";
}

server {
    listen 80;
    server_name domain.ru www.domain.ru;
    rewrite ^(.*) https://domain.ru$1 permanent;
    access_log off;
}

server {
    # listen 80 default_server;
    # listen [::]:80 default_server;
    listen 443 ssl;
    ssl_certificate /etc/nginx/ssl/domain.crt;
    ssl_certificate_key /etc/nginx/ssl/domain.key;

    root /var/lib/ffsecurity;

    autoindex off;

    server_name _;

    location = / {

        alias /usr/share/ffsecurity-ui/;
        try_files /index.html =404;
    }
    location /static/ {

    }
    location /uploads/ {
        add_header 'Access-Control-Allow-Origin' '*';
        add_header 'Access-Control-Allow-Methods' 'GET';
        add_header 'Access-Control-Allow-Headers' 'DNT,User-Agent,X-
↪Requested-With,If-Modified-Since,Cache-Control,Content-Type,
↪Range,Authorization';
        add_header 'Access-Control-Expose-Headers' 'Content-Length,
↪Content-Range';
        add_header 'Access-Control-Max-Age' 2592000;
    }
    location /ui-static/ {
        alias /usr/share/ffsecurity-ui/ui-static/;
    }
    location /doc/ {
        alias /opt/ffsecurity/doc/;
    }
}

```

(continues on next page)

(continued from previous page)

```

location ~ /videos/(?<video_id>[0-9]+)/upload/(.*)$ {
    if ($request_method = 'OPTIONS') {
        add_header 'Content-Type' 'text/plain; charset=utf-8';
        add_header 'Content-Length' 0;
        return 204;
    }
    set $auth_request_uri "http://ffsecurity/videos/$video_id/auth-
↪upload/";
    auth_request /video-upload-auth;

    alias "/var/lib/ffsecurity/uploads/videos/$video_id.bin";
    client_max_body_size 15g;

    dav_access user:rw group:rw all:rw;
    dav_methods PUT;

    create_full_put_path on;
    autoindex off;
    autoindex_exact_size off;
    autoindex_localtime on;
    charset utf-8;

    add_header 'Access-Control-Allow-Origin' '*';
    add_header 'Access-Control-Allow-Methods' 'PUT, OPTIONS';
    add_header 'Access-Control-Allow-Headers' 'authorization';
}
location = /video-upload-auth/ {
    internal;
    client_max_body_size 15g;
    proxy_set_header Content-Length "";
    proxy_set_header Host $http_host;
    proxy_set_header X-Forwarded-For $remote_addr;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_pass_request_body off;
    proxy_pass $auth_request_uri;
}

location / {
    client_max_body_size 300m;
    proxy_set_header Host $http_host;
    proxy_set_header X-Forwarded-For $remote_addr;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_http_version 1.1;
    proxy_set_header Upgrade $http_upgrade;
    proxy_set_header Connection "upgrade";
    proxy_pass $ffsec_upstream;
    proxy_read_timeout 5m;

    location ~ ^/(cameras|videos)/([0-9]+)/stream/?$ {
        proxy_set_header Host $http_host;
        proxy_set_header X-Forwarded-For $remote_addr;
        proxy_set_header X-Forwarded-Proto $scheme;
        proxy_pass http://ffsecurity;
    }

    location ~ ^/streams/(.*)$ {
        internal;

```

(continues on next page)

(continued from previous page)

```
        proxy_pass $1;
    }
}
}
```

4. Restart nginx.

```
sudo service nginx restart
```

5. Edit the `findface-security` configuration file. In the `EXTERNAL_ADDRESS` and `ROUTER_URL` parameters, substitute the `http://` prefix with `https://`.

```
sudo vi /etc/ffsecurity/config.py

...
EXTERNAL_ADDRESS="https://my-example-domain.com"
...
ROUTER_URL="https://IP_address"
```

6. If there are running `findface-video-worker` services in the system, you need to either recreate cameras in the web interface, or change the `router_url` parameter in relevant video processing jobs, substituting the `http://` prefix with `https://`. This can be done with the following command:

```
curl -s localhost:18810/jobs | jq -r '.[]["id"]' | xargs -I {} curl -X PATCH -d '{
↪ "router_url": "https://domain.ru/video-detector/frame"}' http://localhost:18810/
↪ job/{}'
```

1.9.2 Components in Depth

`findface-extraction-api`

The `findface-extraction-api` service uses neural networks to detect a face in an image, extract face biometric data (feature vector), and recognize gender, age, emotions, and other features.

It interfaces with the `findface-sf-api` service as follows:

- Gets original images with faces and normalized face images.
- Returns the coordinates of the face bounding box, and (optionally) feature vector, gender, age and emotions data, should these data be requested by `findface-sf-api`.

Functionality:

- face detection in an original image (with return of the bbox coordinates),
- face normalization,
- feature vector extraction from a normalized image,
- face feature recognition (gender, age, emotions, beard, glasses, face mask, etc.).

The `findface-extraction-api` service can be based on CPU (installed from the `findface-extraction-api` package) or GPU (installed from the `findface-extraction-api-gpu` package). For both CPU- and GPU-accelerated services, configuration is done through the `/etc/findface-extraction-api.ini` configuration file. Its content varies subject to the acceleration type.

CPU-service configuration file:

```

detectors:
  max_batch_size: 1
  instances: 4
  models:
    cheetah:
      model: facedet/cheetah.cpu.fnk
      options:
        min_object_size: 32
        resolutions:
          - 256x256
          - 384x384
          - 512x512
          - 768x768
          - 1024x1024
          - 1536x1536
          - 2048x2048
      quality_estimator: true
  normalizers:
    max_batch_size: 8
    instances: 4
    models:
      crop1x:
        model: ''
      crop2x:
        model: facenorm/crop2x.v2_maxsize400.cpu.fnk
      cropbbox:
        model: ''
      norm200:
        model: facenorm/bee.v2.cpu.fnk
  extractors:
    max_batch_size: 8
    instances: 4
    models:
      age: ''
      beard: ''
      carattr_color: ''
      carattr_description: ''
      carattr_make: ''
      carattr_trash: ''
      countries47: ''
      emotions: ''
      face: face/ifruit_320.cpu.fnk
      gender: ''
      glasses3: ''
      headpose: ''
      liveness: ''
      luminance_overexposure: ''
      luminance_underexposure: ''
      medmask3: ''
      quality: faceattr/quality.v0.cpu.fnk
      sharpness: ''
      validity: ''
  gpu_device: 0
models_root: /usr/share/findface-data/models
cache_dir: /var/cache/findface/models_cache

```

(continues on next page)

(continued from previous page)

```
listen: 127.0.0.1:18666
license_ntls_server: 127.0.0.1:3133
fetch:
  enabled: true
  size_limit: 10485760
max_dimension: 6000
allow_cors: false
ticker_interval: 5000
prometheus:
  timing_buckets: [0.001, 0.005, 0.01, 0.02, 0.03, 0.05, 0.1, 0.2, 0.3, 0.5, 0.75,
    0.9, 1, 1.1, 1.3, 1.5, 1.7, 2, 3, 5, 10, 20, 30, 50]
  resolution_buckets: [10000, 20000, 40000, 80000, 100000, 200000, 400000, 800000,
    1e+06, 2e+06, 3e+06, 4e+06, 5e+06, 6e+06, 8e+06, 1e+07, 1.2e+07, 1.5e+07, 1.8e+07,
    2e+07, 3e+07, 5e+07, 1e+08]
  faces_buckets: [0, 1, 2, 5, 10, 20, 50, 75, 100, 200, 300, 400, 500, 600, 700, 800,
    900, 1000]
```

GPU-service configuration file:

```
detectors:
  max_batch_size: 1
  instances: 1
  models:
    cheetah:
      model: facedet/cheetah.gpu.fnk
      options:
        min_object_size: 32
        resolutions:
          - 256x256
          - 384x384
          - 512x512
          - 768x768
          - 1024x1024
          - 1536x1536
          - 2048x2048
      quality_estimator: true
normalizers:
  max_batch_size: 8
  instances: 1
  models:
    crop1x:
      model: ''
    crop2x:
      model: facenorm/crop2x.v2_maxsize400.gpu.fnk
    cropbbox:
      model: ''
    norm200:
      model: facenorm/bee.v2.gpu.fnk
extractors:
  max_batch_size: 8
  instances: 1
  models:
    age: ''
    beard: ''
    carattr_color: ''
```

(continues on next page)

(continued from previous page)

```
carattr_description: ''
carattr_make: ''
carattr_trash: ''
countries47: ''
emotions: ''
face: face/ifruit_320.gpu.fnk
gender: ''
glasses3: ''
headpose: ''
liveness: ''
luminance_overexposure: ''
luminance_underexposure: ''
medmask3: ''
quality: faceattr/quality.v0.gpu.fnk
sharpness: ''
validity: ''
gpu_device: 0
models_root: /usr/share/findface-data/models
cache_dir: /var/cache/findface/models_cache
listen: 127.0.0.1:18666
license_ntls_server: 127.0.0.1:3133
fetch:
  enabled: true
  size_limit: 10485760
max_dimension: 6000
allow_cors: false
ticker_interval: 5000
prometheus:
  timing_buckets:
    - 0.001
    - 0.005
    - 0.01
    - 0.02
    - 0.03
    - 0.05
    - 0.1
    - 0.2
    - 0.3
    - 0.5
    - 0.75
    - 0.9
    - 1
    - 1.1
    - 1.3
    - 1.5
    - 1.7
    - 2
    - 3
    - 5
    - 10
    - 20
    - 30
    - 50
  resolution_buckets:
    - 10000
    - 20000
    - 40000
```

(continues on next page)

(continued from previous page)

```

- 80000
- 100000
- 200000
- 400000
- 800000
- 1e+06
- 2e+06
- 3e+06
- 4e+06
- 5e+06
- 6e+06
- 8e+06
- 1e+07
- 12000000.0
- 15000000.0
- 18000000.0
- 2e+07
- 3e+07
- 5e+07
- 1e+08
faces_buckets:
- 0
- 1
- 2
- 5
- 10
- 20
- 50
- 75
- 100
- 200
- 300
- 400
- 500
- 600
- 700
- 800
- 900
- 1000

```

When configuring `findface-extraction-api` (on CPU or GPU), refer to the following parameters:

Parameter	Description
<code>detector->quality_estimation</code>	Enables face quality estimation. In this case, <code>findface-extraction-api</code> returns a face quality score in the <code>detection_score</code> field. Interpret the quality score further in analytics. Upright faces in frontal position are considered the best quality. They result in values around 0, mostly negative (such as -0.00067401276, for example). Inverted faces and large face angles are estimated with negative values some -5 and less.
<code>cheetah->min_object_size</code>	The minimum size of a face (bbox) guaranteed to be detected. The larger the value, the less resources required for face detection.
<code>license_server</code>	The license server IP address and port.
<code>gpu_device</code>	(Only for GPU) The number of the GPU device used by <code>findface-extraction-api-gpu</code> .

You will also have to enable recognition models for face features such as gender, age, emotions, glasses3, and/or beard, subject to your needs. Be sure to choose the right acceleration type for each model, matching the acceleration type of `findface-extraction-api`: CPU or GPU. Be aware that `findface-extraction-api` on CPU can work only with CPU-models, while `findface-extraction-api` on GPU supports both CPU- and GPU-models.

```
models:
  age: faceattr/age.v1.cpu.fnk
  emotions: faceattr/emotions.v1.cpu.fnk
  face: face/ifruit_320.cpu.fnk
  gender: faceattr/gender.v2.cpu.fnk
  beard: faceattr/beard.v0.cpu.fnk
  glasses3: faceattr/glasses3.v0.cpu.fnk
  medmask3: faceattr/medmask3.v1.cpu.fnk
```

The following models are available:

Face feature	Acceleration	Configuration file parameter
face (biometry)	CPU	face: face/ifruit_320.cpu.fnk face: face/ifruit_160.cpu.fnk
	GPU	face: face/ifruit_320.gpu.fnk face: face/ifruit_160.gpu.fnk
age	CPU	age: faceattr/age.v1.cpu.fnk
	GPU	age: faceattr/age.v1.gpu.fnk
gender	CPU	gender: faceattr/gender.v2.cpu.fnk
	GPU	gender: faceattr/gender.v2.gpu.fnk
emotions	CPU	emotions: faceattr/emotions.v1.cpu.fnk
	GPU	emotions: faceattr/emotions.v1.gpu.fnk
glasses3	CPU	glasses3: faceattr/glasses3.v0.cpu.fnk
	GPU	glasses3: faceattr/glasses3.v0.gpu.fnk
beard	CPU	beard: faceattr/beard.v0.cpu.fnk
	GPU	beard: faceattr/beard.v0.gpu.fnk
face mask	CPU	medmask3: faceattr/medmask3.v1.cpu.fnk
	GPU	medmask3: faceattr/medmask3.v1.gpu.fnk

Tip: To disable a recognition model, simply pass an empty value to a relevant parameter. Do not remove the parameter itself as in this case the system will be searching for the default model.

```
models:
  gender: ""
  age: ""
  emotions: ""
```

findface-sf-api

The `findface-sf-api` service implements HTTP API for the FindFace core main functionality such as face detection and face recognition (the mentioned functions themselves are provided by `findface-extraction-api`). It interfaces with the biometric database powered by Tarantool via the `findface-tarantool-server` service, as well as with `findface-extraction-api` (provides face detection and face recognition) and `findface-upload` (provides a storage for original images and FindFace core artifacts).

To detect a face in an image, you need to send the image in an API request to `findface-sf-api`. The `findface-sf-api` will then redirect the request to `findface-extraction-api` for face detection and recognition.

If there is a configured video face detection module in the system (like in FindFace Security), `findface-sf-api` also interfaces with the `findface-facerouter` service. It receives data of detected in video faces along with processing directives from `findface-facerouter`, and then executes the received directives, for example, saves faces into a specific database gallery.

Note: In FindFace Security, `findface-facerouter` functions are performed by `findface-security`.

Functionality:

- HTTP API implementation (face detection and face recognition methods, performed via `findface-extraction-api`).
- saving face data to the biometric database (performed via `findface-tarantool-server`),
- saving original images, face thumbnails and normalized face images to an NginX-powered web server (via `findface-upload`).
- provides interaction between all the FindFace core components.

The `findface-sf-api` configuration is done through the `/etc/findface-sf-api.ini` configuration file.

```
listen: 127.0.0.1:18411
extraction-api:
  timeouts:
    connect: 5s
    response_header: 30s
    overall: 35s
    idle_connection: 10s
  extraction-api: http://127.0.0.1:18666
storage-api:
  timeouts:
    connect: 5s
    response_header: 30s
    overall: 35s
    idle_connection: 10s
max-idle-conns-per-host: 20
shards:
- master: http://127.0.0.1:8101/v2/
  slave: ''
- master: http://127.0.0.1:8102/v2/
  slave: ''
- master: http://127.0.0.1:8103/v2/
  slave: ''
- master: http://127.0.0.1:8104/v2/
  slave: ''
limits:
  url-length: 4096
  deny-networks: 127.0.0.0/8,192.168.0.0/16,10.0.0.0/8,::1/128,fe00::/8
  body-image-length: 33554432
  allow-return-facen: false
cache:
  type: memcache
  inmemory:
    size: 16384
```

(continues on next page)

(continued from previous page)

```

memcache:
  nodes:
    - 127.0.0.1:11211
  timeout: 100ms
redis:
  network: tcp
  addr: localhost:6379
  password: ''
  db: 0
  timeout: 5s
normalized-storage:
  type: webdav
  enabled: true
  webdav:
    upload-url: http://127.0.0.1:3333/uploads/
    timeouts:
      connect: 5s
      response_header: 30s
      overall: 35s
      idle_connection: 10s
  s3:
    endpoint: ''
    bucket-name: ''
    access-key: ''
    secret-access-key: ''
    secure: true
    region: ''
    public-url: ''
    operation-timeout: 30

```

When configuring findface-sf-api, refer to the following parameters:

Parameter	Description
extraction-api -> extraction-api	IP address of the findface-extraction-api host.
storage-api -> shards -> master	IP address of the findface-tarantool-server master shard.
storage-api -> shards -> slave	IP address of the findface-tarantool-server replica shard.
limits -> body-image-length	The maximum size of an image in an API request, bytes.
normalized-storage -> webdav -> upload_url	WebDAV NginX path to send original images, thumbnails and normalized face images to the findface-upload service.

findface-tarantool-server

The findface-tarantool-server service provides interaction between the findface-sf-api service and the Tarantool-based biometric database in the following way:

Tip: See [Tarantool official documentation](#) for details.

- From `findface-sf-api`, `findface-tarantool-server` receives data, such as information of detected in video faces, to write into the biometric database.
- By request from `findface-sf-api`, `findface-tarantool-server` performs database searches and returns search results.

To increase search speed, multiple `findface-tarantool-server` shards can be created on each Tarantool host. Their running concurrently leads to a remarkable increase in performance (70x-100x).

Functionality:

- saving face data to the biometric database,
- database search,
- implementation of direct API requests to the database (see *Direct API Requests to Tarantool*).

The `findface-tarantool-server` configuration is done through the `/etc/tarantool/instances.enabled/<shard-*>.lua` configuration file. In a cluster environment, configuration has to be done for each shard.

```
--
-- Please, read the tarantool cfg doc:
-- https://tarantool.org/doc/reference/configuration/index.html#box-cfg-params
--
box.cfg{
    --port to listen, direct tarantool access
    --Only need for admin operations
    --THIS IS NOT PORT YOU NEED FOR facenapi/sf-api
    listen = '127.0.0.1:32001',
    --Directory to store data
    vinyl_dir = '/opt/ntech/var/lib/tarantool/shard-001',
    work_dir = '/opt/ntech/var/lib/tarantool/shard-001',
    memtx_dir = '/opt/ntech/var/lib/tarantool/shard-001/snapshots',
    wal_dir = '/opt/ntech/var/lib/tarantool/shard-001/xlogs',
    --Maximum mem usage in bytes
    memtx_memory = 200 * 1024 * 1024,
    checkpoint_interval = 3600*4,
    checkpoint_count = 3,
    --uncomment only if you know what you are doing!!! and don't forget box.snapshot()
    -- wal_mode = 'none',
    --if true, tarantool tries to continue if there is an error while reading a
    ↳snapshot/xlog files: skips invalid records, reads as much data as possible and re-
    ↳builds the file
    -- force_recovery = true,
}
pcall(function() box.schema.user.grant('guest', 'execute,read,write', 'universe') end)
dofile("/etc/ffsecurity/tnt_schema.lua")
-- host,port to bind for http server
FindFace = require("FindFace")
FindFace.start("127.0.0.1", 8101, {
    license_ntls_server="127.0.0.1:3133",
    meta_indexes=meta_indexes,
    meta_scheme = meta_scheme
})
```

When configuring `findface-tarantool-server`, refer to the following parameters:

Parameter	Description
memtx_max_size	Maximum RAM that can be used by a Tarantool shard. Set in bytes, depending on the number of faces the shard handles. Consult our experts by support@ntechlab.com before setting this parameter.
force_recovery	Enables automatic database recovery. In this case, each time an error occurs while reading a snapshot or xlog file, Tarantool will skip invalid records, read as much data as possible, and re-build the file.
license_server	IP address and port of the findface-ntls license server.
meta_schema	A database structure to store the face recognition results. The structure is created as a set of fields. Describe each field with the following parameters: id: field id; name: field name, must be the same as the name of a relevant face parameter; field_type: data type; default: field default value, if a default value exceeds '1e14 - 1', use a string data type to specify it, for example, "123123.." instead of 123123...

Default database structure is passed from `/etc/ffsecurity/tnt_schema.lua` to the `meta_scheme` parameter.

findface-upload

The `findface-upload` component is an NginX-based web server used as a storage for original images, thumbnails and normalized face images which it receives from the `findface-sf-api` component.

By default the original images, thumbnails and normalized images are stored at `/var/lib/ffupload/uploads/`.

The `findface-upload` component is automatically configured upon installation. Custom configuration is not supported.

Video face detection: findface-video-manager and findface-video-worker

Note: The `findface-video-worker` is delivered in a CPU-accelerated (`findface-video-worker-cpu`) and a GPU-accelerated (`findface-video-worker-gpu`) packages.

In this section:

- *Functions of findface-video-manager*
- *Functions of findface-video-worker*
- *Configure Video Face Detection*
- *Jobs*

Functions of findface-video-manager

The `findface-video-manager` service is the part of the video face detection module that is used for managing the video face detection functionality.

The `findface-video-manager` service interfaces with `findface-video-worker` as follows:

- It supplies `findface-video-worker` with settings and the list of to-be-processed video streams. To do so, it issues a so-called *job*, a video processing task that contains configuration settings and stream data.
- In a distributed system, it distributes video streams (jobs) across vacant `findface-video-worker` instances.

Note: Configuration settings passed via jobs have priority over the `findface-video-manager` configuration file.

The `findface-video-manager` service functioning requires ETCD, third-party software that implements a distributed key-value store for `findface-video-manager`. In the FindFace core, ETCD is used as a coordination service, providing the video face detector with fault tolerance.

Functionality:

- allows for configuring video face detection parameters,
- allows for managing the list of to-be-processed video streams,
- implements video face detection management.

Functions of `findface-video-worker`

The `findface-video-worker` service (on CPU/GPU) is the part of the video face detection module, that recognizes faces in the video. It can work with both live streams and files, and supports most video formats and codecs that can be decoded by `FFmpeg`.

The `findface-video-worker` service interfaces with the `findface-video-manager` and `findface-facerouter` services as follows:

- By request, `findface-video-worker` gets a job with settings and the list of to-be-processed video streams from `findface-video-manager`.
- The `findface-video-worker` posts extracted normalized face images, along with the full frames and meta data (such as `bbox`, camera ID and detection time) to the `findface-facerouter` service for further processing.

Note: In FindFace Security, the `findface-facerouter` functions are performed by `findface-security`.

Functionality:

- detects faces in the video,
- extracts normalized face images,
- searches for the best face snapshot,
- snapshot deduplication (only one snapshot per face detection event).

When processing video, `findface-video-worker` consequently uses the following algorithms:

- **Motion detection.** Used to reduce resource consumption. Only when the motion detector recognizes the motion of certain intensity that the face tracker can be triggered.
- **Face tracking.** The face tracker traces, detects and captures faces in the video. It can simultaneously be working with several faces. It also searches for the best face snapshot, using an embedded neural network. After the best face snapshot is found, it is posted to `findface-facerouter`.

The best face snapshot can be found in one of the following modes:

- Real-time
- Offline

Real-Time Mode

In the real-time mode, `findface-video-worker` posts a face on-the-fly after it appears in the camera field of view. The following posting options are available (see `/etc/findface-video-manager.conf` or [Add Camera](#)):

- If `realtime_post_every_interval: true`, the face tracker searches for the best face snapshot within each time period equal to `realtime_post_interval` and posts it to `findface-facerouter`.
- If `realtime_post_every_interval: false`, the face tracker searches for the best face snapshot dynamically:
 1. First, the face tracker estimates whether the quality of a face snapshot exceeds a pre-defined internal threshold. If so, the snapshot is posted to `findface-facerouter`.
 2. The threshold value increases after each post. Each time the face tracker gets a higher quality snapshot of the same face, it is posted.
 3. When the face disappears from the camera field of view, the threshold value resets to default.
- If `realtime_post_first_immediately: true`, the face tracker posts the very first face snapshot immediately after the face appears in the camera field of view. The following postings depend on the `realtime_post_every_interval` value.

Offline Mode

The offline mode is less storage intensive than the real-time one as in this mode `findface-video-worker` posts only one snapshot per track, but of the highest quality. In this mode, the face tracker buffers a video stream with a face in it until the face disappears from the camera field of view. Then the face tracker picks up the best face snapshot from the buffered video and posts it to `findface-facerouter`.

By default, the offline mode is enabled through the `overall_only` parameter (see `/etc/findface-video-manager.conf` or [Add Camera](#)).

Configure Video Face Detection

The video face detector configuration is done through the following configuration files:

1. The `findface-video-manager` configuration file `/etc/findface-video-manager.conf`:

```
listen: 127.0.0.1:18810
etcd:
  endpoints: 127.0.0.1:2379
  dial_timeout: 3s
kafka:
  enabled: false
  endpoints: 127.0.0.1:9092
master:
  lease_ttl: 10
  self_url: 127.0.0.1:18811
  self_url_http: 127.0.0.1:18810
rpc:
```

(continues on next page)

(continued from previous page)

```
listen: 127.0.0.1:18811
heart_beat_timeout: 4s
router_url: http://127.0.0.1:18820/v0/frame
exp_backoff:
  enabled: false
  min_delay: 1s
  max_delay: 1m0s
  factor: 2
  flush_interval: 2m0s
ntls:
  enabled: false
  url: http://127.0.0.1:3185/
  update_interval: 1m0s
prometheus:
  jobs_processed_duration_buckets:
    - 1
    - 30
    - 60
    - 500
    - 1800
    - 3600
    - 21600
    - .inf
job_scheduler_script: ''
stream_settings:
  ffmpeg_params: []
  md_threshold: 0.002
  md_scale: 0.3
  fd_frame_height: -1
  uc_max_time_diff: 30
  uc_max_dup: 3
  uc_max_avg_shift: 10
  det_period: 8
  realtime: false
  npersons: 4
  disable_drops: false
  tracker_threads: 4
  parse_sei: false
  image_arg: photo
  additional_headers: []
  additional_body: []
  api_timeout: 15000
  api_ssl_verify: true
  post_uniq: true
  min_score: -2
  min_d_score: -1000
  realtime_dly: 500
  realtime_post_perm: false
  rot: ''
  roi: ''
  draw_track: false
  send_track: 0
  min_face_size: 0
  max_face_size: 0
  overall: true
  only_norm: false
  max_candidates: 0
```

(continues on next page)

(continued from previous page)

```

    jpeg_quality: 95
    ffmpeg_format: ''
stream_settings_gpu:
    play_speed: -1
    filter_min_quality: -2
    filter_min_face_size: 1
    filter_max_face_size: 8192
    normalized_only: false
    jpeg_quality: 95
    overall_only: false
    use_stream_timestamp: false
    ffmpeg_params: []
    router_timeout_ms: 15000
    router_verify_ssl: true
    router_headers: []
    router_body: []
    start_stream_timestamp: 0
    imotion_threshold: 0
    rot: ''
    roi: ''
    realtime_post_interval: 1
    realtime_post_every_interval: true
    ffmpeg_format: ''
    disable_drops: false
    router_full_frame_png: false
    router_disable_normalized: false
    crop_fullframe_rot: false
    realtime_post_first_immediately: false

```

When configuring findface-video-manager, refer to the following parameters:

Option	Description
router_url	IP address and port of the findface-facerouter host to receive detected faces from findface-video-worker. In FindFace Security, findface-facerouter functions are performed by findface-security. Default value: <code>http://127.0.0.1:18820/v0/frame</code> .
etcd -> endpoints	IP address and port of the etcd service. Default value: <code>127.0.0.1:2379</code> .
ntls -> enabled	If true, findface-video-manager will send a job to findface-video-worker only if the total number of processed cameras does not exceed the allowed number of cameras from the license. Default value: false.
ntls -> url	IP address and port of the findface-ntls host. Default value: <code>http://127.0.0.1:3185/</code> .

You can also configure the following parameters:

Note: In the `stream_settings-gpu` section of the file, you will find general settings for all video streams. The settings in this section work for both CPU and GPU configuration. Settings of a particular stream, passed in a job, have priority over those in the configuration file (see *Jobs*).

Note: The `stream_settings` section of the file is deprecated and necessary only for backward

compatibility.

Option	Description
play_speed	If less than zero, the speed is not limited. In other cases, the stream is read with the given play_speed. Not applicable for live streams.
filter_min_quality	Minimum threshold value for a face image quality. A face is posted if it has better quality. The threshold value is to be fitted empirically. Empirical units: negative rational numbers to zero. Milestones: 0 = high quality faces, -1 = good quality, -2 = satisfactory quality, -5 = face recognition maybe inefficient. Default value: -2.
filter_min_size	Minimum size of a face in pixels. Undersized faces are not posted. Default value: 0 (filter disabled).
filter_max_size	Maximum size of a face in pixels. Oversized faces are not posted. Default value: 0 (filter disabled).
normalized	Enable posting only normalized face images without full frames. Default value: false.
jpeg_quality	Quality of an original frame JPEG compression, in percents. Default value: 95%.
overall_only	Enables the offline mode for the best face search. Default value: true.
use_stream_time	If true, retrieve and post timestamps from a video stream. If false, post the actual date and time.
ffmpeg_params	List of a video stream ffmpeg options with their values as a key=value array: ["rtsp_transport=tcp", .., "ss=00:20:00"]. Check out the FFMpeg web site for the full list of options. Default value: options not specified.
router_timeout	Timeout for a findface-facerouter (or findface-security in the standard FindFace Security configuration) response to a findface-video-worker API request, in milliseconds. If the timeout has expired, the system will log an error. Default value: 15000.
router_verify_https	Enables a https certificate verification when findface-video-worker and findface-facerouter (or findface-security in the standard FindFace Security configuration) interact over https. Default value: true. If false, a self-signed certificate can be accepted.
router_headers	Additional header fields in a request when posting a face: ["key = value"]. Default value: headers not specified.
router_body	Additional body fields in a request body when posting a face: ["key = value"]. Default value: body fields not specified.
start_stream_offset	Add the specified number of seconds to timestamps from a stream.
imotion_threshold	Minimum motion intensity to be detected by the motion detector. The threshold value is to be fitted empirically. Empirical units: zero and positive rational numbers. Milestones: 0 = detector disabled, 0.002 = default value, 0.05 = minimum intensity is too high to detect motion.
rot	Enables detecting and tracking faces only inside a clipping rectangle WxH+X+Y. You can use this option to reduce findface-video-worker load. Default value: rectangle not specified.
roi	Enable posting faces detected only inside a region of interest WxH+X+Y. Default value: region not specified.
realtime_post	Only for the real-time mode. Defines the time period in seconds within which the face tracker picks up the best snapshot and posts it to findface-facerouter. Default value: 1.
realtime_post_order	Only for the real-time mode. Post best snapshots obtained within each realtime_post_interval time period. If false, search for the best snapshot dynamically and send snapshots in order of increasing quality. Default value: false.
ffmpeg_format	Pass FFMPEG format (mxg, flv, etc.) if it cannot be detected automatically.
disable_drop	Enables posting all appropriate faces without drops. By default, if findface-video-worker does not have enough resources to process all frames with faces, it drops some of them. If this option is active, findface-video-worker puts odd frames on the waiting list to process them later. Default value: false.
router_full_frames	Send full frames in PNG and not in JPEG as set by default. Do not enable this parameter without supervision from our team as it can affect the entire system functioning. Default value: false (send in JPEG).
router_disable_normalize	Send only full frames without normalized images. Do not enable this parameter without supervision from our team as it can affect the entire system functioning. Default value: false (send full frames and normalized images).

1. If you opt for the CPU-accelerated package `findface-video-worker-cpu`, use the `/etc/findface-video-worker-cpu.ini` configuration file:

```
## read streams from file, do not use VideoManager
## type:string env:CFG_INPUT longopt:--input
input =
## exit on first finished job, only when --input specified
## type:bool env:CFG_EXIT_ON_FIRST_FINISHED longopt:--exit-on-first-finished
exit_on_first_finished = false
## batch size
## type:number env:CFG_BATCH_SIZE longopt:--batch-size
batch_size = 4
## http server port for metrics, 0=do not start server
## type:number env:CFG_METRICS_PORT longopt:--metrics-port
metrics_port = 0
## resize scale, 1=do not resize
## type:double env:CFG_RESIZE_SCALE longopt:--resize-scale
resize_scale = 1.000000
## maximum number of streams
## type:number env:CFG_CAPACITY longopt:--capacity
capacity = 10
## command to obtain videomanager's grpc ip:port
## type:string env:CFG_MGR_CMD longopt:--mgr-cmd
mgr_cmd =
## videomanager grpc ip:port
## type:string env:CFG_MGR_STATIC longopt:--mgr-static
mgr_static = 127.0.0.1:18811
## ntls server ip:port
## type:string env:CFG_NTLS_ADDR longopt:--ntls-addr
ntls_addr = 127.0.0.1:3133
## debug: save faces to dir
## type:string env:CFG_SAVE_DIR longopt:--save-dir
save_dir =
## minimum face size
## type:number env:CFG_MIN_FACE_SIZE longopt:--min-face-size
min_face_size = 60
## preinit detector for specified resolutions: "640x480;1920x1080"
## type:string env:CFG_RESOLUTIONS longopt:--resolutions
resolutions =
## worker labels: labels = k=v;group=enter
## type:string env:CFG_LABELS longopt:--labels
labels =
## use timestamps from SEI packet
## type:bool env:CFG_USE_TIME_FROM_SEI longopt:--use-time-from-sei
use_time_from_sei = false
## reader frame buffer size
## type:number env:CFG_FRAME_BUFFER_SIZE longopt:--frame-buffer-size
frame_buffer_size = 128
## skip count
## type:number env:CFG_SKIP_COUNT longopt:--skip-count
skip_count = 2
#-----
[streamer]
#-----
## streamer/shots webserver port, 0=disabled
## type:number env:CFG_STREAMER_PORT longopt:--streamer-port
port = 18999
## streamer url - how to access this worker on streamer_port
```

(continues on next page)

(continued from previous page)

```

## type:string env:CFG_STREAMER_URL longopt:--streamer-url
url = 127.0.0.1:18999
#-----
[liveness]
#-----
## path to liveness fnk
## type:string env:CFG_LIVENESS_FNK longopt:--liveness-fnk
fnk =
## path to normalization for liveness
## type:string env:CFG_LIVENESS_NORM longopt:--liveness-norm
norm =
## liveness internal algo param
## type:double env:CFG_LIVENESS_INTERVAL longopt:--liveness-interval
interval = 1.000000
## liveness internal algo param
## type:number env:CFG_LIVENESS_STDEV_CNT longopt:--liveness-stdev-cnt
stdev_cnt = 1
#-----
[send]
#-----
## posting faces threads
## type:number env:CFG_SEND_THREADS longopt:--send-threads
threads = 8
## posting faces maximum queue size
## type:number env:CFG_SEND_QUEUE_LIMIT longopt:--send-queue-limit
queue_limit = 256
#-----
[tracker]
#-----
## interpolate undetected bboxes in track
## type:bool env:CFG_TRACKER_INTERPOLATE_BBOXES longopt:--tracker-interpolate-
↳bboxes
interpolate_bboxes = true
## max face miss duration, sec
## type:double env:CFG_TRACKER_MISS_INTERVAL longopt:--tracker-miss-interval
miss_interval = 1.000000
## overlap threshold
## type:double env:CFG_TRACKER_OVERLAP_THRESHOLD longopt:--tracker-overlap-
↳threshold
overlap_threshold = 0.250000
#-----
[models]
#-----
## path to pedestrian detector fnk
## type:string env:CFG_MODELS_BODY_DETECTOR longopt:--models-body-detector
body_detector =
## path to detector fnk
## type:string env:CFG_MODELS_DETECTOR longopt:--models-detector
detector = /usr/share/findface-data/models/facedet/cheetah_fast.cpu.fnk
## path to quality fnk
## type:string env:CFG_MODELS_QUALITY longopt:--models-quality
quality = /usr/share/findface-data/models/faceattr/quality.v0.cpu.fnk
## path to norm for quality fnk
## type:string env:CFG_MODELS_NORM_QUALITY longopt:--models-norm-quality
norm_quality = /usr/share/findface-data/models/facenorm/bee_fast.cpu.fnk
## path to norm200 fnk, for face send
## type:string env:CFG_MODELS_NORM_200 longopt:--models-norm-200

```

(continues on next page)

(continued from previous page)

```

norm_200 = /usr/share/findface-data/models/facenorm/bee.v2.cpu.fnk
## path to norm_crop2x fnk, for face send
## type:string env:CFG_MODELS_NORM_CROP2X longopt:--models-norm-crop2x
norm_crop2x = /usr/share/findface-data/models/facenorm/crop2x.v2_maxsize400.cpu.
↪fnk
## path to cache directory
## type:string env:CFG_MODELS_CACHE_DIR longopt:--models-cache-dir
cache_dir = /var/cache/findface/models_cache

```

If you opt for the GPU-accelerated package `findface-video-worker-gpu`, use the `/etc/findface-video-worker-gpu.ini` configuration file.

```

## cuda device number
## type:number env:CFG_DEVICE_NUMBER longopt:--device-number
device_number = 0
## apply getprop patch
## type:bool env:CFG_PATCH_GETPROP longopt:--patch-getprop
patch_getprop = false
## read streams from file, do not use VideoManager
## type:string env:CFG_INPUT longopt:--input
input =
## exit on first finished job, only when --input specified
## type:bool env:CFG_EXIT_ON_FIRST_FINISHED longopt:--exit-on-first-finished
exit_on_first_finished = false
## batch size
## type:number env:CFG_BATCH_SIZE longopt:--batch-size
batch_size = 8
## http server port for metrics, 0=do not start server
## type:number env:CFG_METRICS_PORT longopt:--metrics-port
metrics_port = 0
## resize scale, 1=do not resize
## type:double env:CFG_RESIZE_SCALE longopt:--resize-scale
resize_scale = 1.000000
## maximum number of streams
## type:number env:CFG_CAPACITY longopt:--capacity
capacity = 30
## command to obtain videomanager's grpc ip:port
## type:string env:CFG_MGR_CMD longopt:--mgr-cmd
mgr_cmd =
## videomanager grpc ip:port
## type:string env:CFG_MGR_STATIC longopt:--mgr-static
mgr_static = 127.0.0.1:18811
## ntls server ip:port
## type:string env:CFG_NTLS_ADDR longopt:--ntls-addr
ntls_addr = 127.0.0.1:3133
## debug: save faces to dir
## type:string env:CFG_SAVE_DIR longopt:--save-dir
save_dir =
## minimum face size
## type:number env:CFG_MIN_FACE_SIZE longopt:--min-face-size
min_face_size = 60
## preinit detector for specified resolutions: "640x480;1920x1080"
## type:string env:CFG_RESOLUTIONS longopt:--resolutions
resolutions =
## worker labels: labels = k=v;group=enter
## type:string env:CFG_LABELS longopt:--labels

```

(continues on next page)

(continued from previous page)

```

labels =
## use timestamps from SEI packet
## type:bool env:CFG_USE_TIME_FROM_SEI longopt:--use-time-from-sei
use_time_from_sei = false
## reader frame buffer size
## type:number env:CFG_FRAME_BUFFER_SIZE longopt:--frame-buffer-size
frame_buffer_size = 128
## skip count
## type:number env:CFG_SKIP_COUNT longopt:--skip-count
skip_count = 0
#-----
[streamer]
#-----
## streamer/shots webserver port, 0=disabled
## type:number env:CFG_STREAMER_PORT longopt:--streamer-port
port = 0
## streamer url - how to access this worker on streamer_port
## type:string env:CFG_STREAMER_URL longopt:--streamer-url
url = 127.0.0.1:9999
#-----
[liveness]
#-----
## path to liveness fnk
## type:string env:CFG_LIVENESS_FNK longopt:--liveness-fnk
fnk =
## path to normalization for liveness
## type:string env:CFG_LIVENESS_NORM longopt:--liveness-norm
norm =
## liveness internal algo param
## type:double env:CFG_LIVENESS_INTERVAL longopt:--liveness-interval
interval = 1.000000
## liveness internal algo param
## type:number env:CFG_LIVENESS_STDEV_CNT longopt:--liveness-stdev-cnt
stdev_cnt = 1
#-----
[send]
#-----
## posting faces threads
## type:number env:CFG_SEND_THREADS longopt:--send-threads
threads = 8
## posting faces maximum queue size
## type:number env:CFG_SEND_QUEUE_LIMIT longopt:--send-queue-limit
queue_limit = 256
#-----
[tracker]
#-----
## interpolate undetected bboxes in track
## type:bool env:CFG_TRACKER_INTERPOLATE_BBOXES longopt:--tracker-interpolate-
↪bboxes
interpolate_bboxes = true
## max face miss duration, sec
## type:double env:CFG_TRACKER_MISS_INTERVAL longopt:--tracker-miss-interval
miss_interval = 1.000000
## overlap threshold
## type:double env:CFG_TRACKER_OVERLAP_THRESHOLD longopt:--tracker-overlap-
↪threshold
overlap_threshold = 0.250000

```

(continues on next page)

(continued from previous page)

```

#-----
[models]
#-----
## path to pedestrian detector fnk
## type:string env:CFG_MODELS_BODY_DETECTOR longopt:--models-body-detector
body_detector =
## path to detector fnk
## type:string env:CFG_MODELS_DETECTOR longopt:--models-detector
detector = /usr/share/findface-data/models/facedet/cheetah_fast.gpu.fnk
## path to quality fnk
## type:string env:CFG_MODELS_QUALITY longopt:--models-quality
quality = /usr/share/findface-data/models/faceattr/quality.v0.gpu.fnk
## path to norm for quality fnk
## type:string env:CFG_MODELS_NORM_QUALITY longopt:--models-norm-quality
norm_quality = /usr/share/findface-data/models/facenorm/bee_fast.gpu.fnk
## path to norm200 fnk, for face send
## type:string env:CFG_MODELS_NORM_200 longopt:--models-norm-200
norm_200 = /usr/share/findface-data/models/facenorm/bee.v2.gpu.fnk
## path to norm_crop2x fnk, for face send
## type:string env:CFG_MODELS_NORM_CROP2X longopt:--models-norm-crop2x
norm_crop2x = /usr/share/findface-data/models/facenorm/crop2x.v2_maxsize400.gpu.
↪fnk
## path to cache directory
## type:string env:CFG_MODELS_CACHE_DIR longopt:--models-cache-dir
cache_dir = /var/cache/findface/models_cache
#-----
[video_decoder]
#-----
## decode video on cpu
## type:bool env:CFG_VIDEO_DECODER_CPU longopt:--video-decoder-cpu
cpu = false

```

When configuring findface-video-worker (on CPU/GPU), refer to the following parameters:

CPU	GPU	Description
ntls-addr		IP address and port of the findface-ntls host.
mgr-static		IP address of the findface-video-manager host to provide findface-video-worker with settings and the list of to-be-processed streams.
capacity		Maximum number of video streams to be processed by findface-video-worker.
mgr-cmd		(Optional, instead of the mgr-static parameter) A command to obtain the IP address of the findface-video-manager host.
labels		Labels used to allocate a video face detector instance to a certain group of cameras. See <i>Allocate findface-video-worker to Camera Group</i> .
streamer->port, url		IP address and port to access the <i>video wall</i> .
liveness->fnk		Path to the face <i>liveness</i> detector.
liveness->norm		Path to the normalizer used in the <i>liveness</i> detector.
input		Process streams from file, ignoring stream data from findface-video-manager.
exit_on_first_finished_job		(Only if input is specified) Exit on the first finished job.
resize_scale		Rescale video frames with the given coefficient.
save_dir		(For debug) Save detected faces to the given directory.
min_face_size		Minimum face size to be detected.
N/a	device_number	GPU device number to use.
N/a	models_dir	Old directory with GPU detector models. Otherwise, use the [models] section.
N/a	cpu	If necessary, decode video on CPU.

Jobs

The findface-video-manager service provides findface-video-worker with a so-called job, a video processing task that contains configuration settings and stream data.

The content of a typical job is shown in the example below.

```
curl http://127.0.0.1:18810/job/1 | jq
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total     Spent    Left     Speed
100  2045  100  2045    0     0   199k      0  --:--:-- --:--:-- --:--:--   221k
[
  {
    "id": "ffsec_video_source",
    "enabled": false,
    "stream_url": "file:///var/lib/ffsecurity/uploads/videos/2.bin",
    "labels": {
      "camera_group_id": "1",
      "camera_id": "0",
      "video_source_id": "2"
    },
    "router_url": "http://127.0.0.1/video-detector/frame",
    "single_pass": true,
    "stream_settings": {
      "ffmpeg_params": [],
      "md_threshold": 0.002,
      "md_scale": 0.3,
      "fd_frame_height": -1,

```

(continues on next page)

(continued from previous page)

```

    "uc_max_time_diff": 30,
    "uc_max_dup": 3,
    "uc_max_avg_shift": 10,
    "det_period": 8,
    "realtime": false,
    "npersons": 4,
    "disable_drops": true,
    "tracker_threads": 4,
    "parse_sei": false,
    "image_arg": "photo",
    "additional_headers": [
      "Authorization=Token 08ad0f283812584b731c62f7d14cb7d0"
    ],
    "additional_body": [],
    "api_timeout": 15000,
    "api_ssl_verify": true,
    "post_uniq": true,
    "min_score": -2,
    "min_d_score": -1000,
    "realtime_dly": 500,
    "realtime_post_perm": false,
    "rot": "",
    "roi": "",
    "draw_track": false,
    "send_track": 0,
    "min_face_size": 0,
    "max_face_size": 0,
    "overall": true,
    "only_norm": false,
    "max_candidates": 0,
    "jpeg_quality": 95,
    "ffmpeg_format": ""
  },
  "stream_settings_gpu": {
    "play_speed": -1,
    "filter_min_quality": -2,
    "filter_min_face_size": 1,
    "filter_max_face_size": 8192,
    "normalized_only": false,
    "jpeg_quality": 95,
    "overall_only": false,
    "use_stream_timestamp": false,
    "ffmpeg_params": [],
    "router_timeout_ms": 15000,
    "router_verify_ssl": true,
    "router_headers": [
      "Authorization=Token 08ad0f283812584b731c62f7d14cb7d0"
    ],
    "router_body": [],
    "start_stream_timestamp": 0,
    "imotion_threshold": 0,
    "rot": "",
    "roi": "",
    "realtime_post_interval": 1,
    "realtime_post_every_interval": true,
    "ffmpeg_format": "",
    "disable_drops": true,

```

(continues on next page)

(continued from previous page)

```

    "router_full_frame_png": false,
    "router_disable_normalized": false,
    "crop_fullframe_rot": false,
    "realtime_post_first_immediately": false
  },
  "status": "DISABLED",
  "status_msg": "",
  "statistic": {
    "processed_duration": 0,
    "faces_posted": 0,
    "faces_failed": 0,
    "faces_not_posted": 0,
    "processing_fps": 0,
    "frames_dropped": 0,
    "frames_processed": 0,
    "frames_imotion_skipped": 0,
    "decoding_soft_errors": 0,
    "job_starts": 0
  },
  "restream_url": "ws://127.0.0.1:18999/stream/ffsec_video_source",
  "shots_url": "http://127.0.0.1:18999/shot/ffsec_video_source",
  "worker_id": "",
  "version": "brb4165r6c591lrq2a40"
}
]

```

Each job has the following parameters:

- `id`: job id.
- `enabled`: active status.
- `stream_url`: URL/address of video stream/file to process.
- `labels`: tag(s) that will be used by the `findface-facerouter` component (`findface-security` in the standard FindFace Security configuration) to find processing directives for faces detected in this stream.
- `single_pass`: if true, disable restarting video processing upon error (by default, false).
- `router_url`: IP address and port of the `findface-facerouter` component (`findface-security` in the standard FindFace Security configuration) to receive detected faces from the `findface-video-worker` component for processing.
- `stream_settings`: used only for backward compatibility.
- `stream_settings_gpu`: video stream settings that duplicate *those* in the `findface-video-manager` configuration file (while having priority over them).
- `status`: job status.
- `status_msg`: additional job status info.
- `statistic`: job progress statistics (progress duration, number of posted and not posted faces, processing fps, the number of processed and dropped frames, job start time, etc.).
- `worker_id`: id of the `findface-video-worker` instance executing the job.

findface-ntls

The findface-ntls service is to be installed on a designated host to verify the FindFace license. For verification purposes, findface-ntls uses one of the following sources:

- Ntech Lab global license center if you opt for the online licensing, direct or via a proxy server.
- USB dongle if you opt for the on-premise licensing.

Use the main web interface to manage findface-ntls:

- view the list of purchased features,
- view license limitations,
- upload a license file,
- view the list of currently active components.

The following components are licensable:

- findface-tarantool-server,
- findface-extraction-api,
- findface-video-manager,
- findface-video-worker.

Important: After connection between findface-ntls and a licensable component, or between findface-ntls and the global license server is broken, you will have 6 hours to restore it before the licensable components will be automatically stopped.

The findface-ntls configuration is done through a configuration file `/etc/findface-ntls.cfg`.

```
# Listen address of NTLS server where services will connect to.
# The format is IP:PORT
# Use 0.0.0.0:PORT to listen on all interfaces
# This parameter is mandatory and may occur multiple times
# if you need to listen on several specific interfaces or ports.
listen = 127.0.0.1:3133

# Directory with license files.
# NTLS use most recently generated one.
# Note: "recentness" of a license file is detected not by
#       mtime/ctime but from its internal structure.
#
# This parameter is mandatory and must occur exactly once.
license-dir = /opt/ntech/license

# You can specify proxy which NTLS will use to access
# global license server. The syntax is the same that is used by curl.
# Proxy is optional
#proxy = http://192.168.1.1:12345

# This is bind address for NTLS web-interface.
# Note: there're no authorization or access restriction mechanisms
#       in NTLS UI. If you need one, consider using nginx as proxy
#       with .htaccess / ip-based ACLs.
```

(continues on next page)

(continued from previous page)

```
# This parameter may be specified multiple times.
ui = 127.0.0.1:3185
```

When configuring `findface-ntls`, refer to the following parameters:

Parameter	Description
<code>listen</code>	IP address from which licensable services access <code>findface-ntls</code> . To allow access from any IP address, use <code>0.0.0.0:3133</code> .
<code>license_dir</code>	Directory to store a license file.
<code>proxy</code>	(Optional) IP address and port of your proxy server.
<code>ui</code>	IP address from which accessing the <code>findface-ntls</code> web interface must originate. To allow access from any remote host, set <code>"0.0.0.0"</code> .

`findface-security`

The `findface-security` component serves as a gateway to the FindFace core. It provides interaction between the FindFace Core and the web interface, the system functioning as a whole, HTTP and web socket (along with Django), database update, and *webhooks*.

The `findface-security` component also performs the functions of `findface-facerouter` (part of the FindFace Core), setting processing directives for detected faces. It accepts a face bbox and normalized image along with the original image and other data (for example, the detection date and time) from the `findface-video-worker` service and redirect them to `findface-sf-api` for further processing.

The `findface-security` configuration is done through the `/etc/ffsecurity/config.py` configuration file.

```
sudo vi /etc/ffsecurity/config.py

#
=====
# FindFace Security configuration file
#
=====
#
# This config file is written in Python's syntax and interpreted at FindFace_
# Security
# service startup. You have to restart the service in order to apply changes.
#
# If you have any questions or suggestions, please contact us at_
# support@ntechlab.com
#
=====
# GENERAL SETTINGS
#
=====
# enables additional logs
DEBUG = False
# media files directory
MEDIA_ROOT = "/var/lib/ffsecurity/uploads"
# static files directory
STATIC_ROOT = "/var/lib/ffsecurity/static"
# language code
```

(continues on next page)

(continued from previous page)

```

LANGUAGE_CODE = 'en-us'
# time zone
TIME_ZONE = 'UTC'
# Database is used by FindFace Security to store cameras,
# camera groups, watchlists and so on. Only PostgreSQL is supported.
DATABASES = {
    'default': {
        'ENGINE': 'django.db.backends.postgresql',
        'DISABLE_SERVER_SIDE_CURSORS': True,
        'NAME': 'ffsecurity',
        'PORT': 5439, 'USER': 'ntech', 'PASSWORD':
→ 'lY4KrQbotHVFdZ0Ed5z8EBvDUzSsmw2o'
    }
}
# Signature key for session encryption
# Use pwgen -sncy 50 1/tr "" "" to generate your own unique key
SECRET_KEY = 'dlc22e3b368f2f8be4caa95b3540ce0c'
#_
→=====
# FINDFACE SECURITY SETTINGS
#_
→=====
# SERVICE_EXTERNAL_ADDRESS is prioritized for FFSecurity webhooks and_
→Genetec plugin.
# EXTERNAL_ADDRESS is used instead if SERVICE_EXTERNAL_ADDRESS is not_
→provided.
# You must provide either SERVICE_EXTERNAL_ADDRESS or EXTERNAL_ADDRESS in_
→order
# to be able to work with FFSecurity webhooks and Genetec plugin.
SERVICE_EXTERNAL_ADDRESS = 'http://127.0.0.1'
# EXTERNAL_ADDRESS is used to access objects created inside FFSecurity via_
→external links.
EXTERNAL_ADDRESS = ''
# - Base FFSecurity settings -
FFSECURITY = {
    # findface-video-worker authorization token
    'VIDEO_DETECTOR_TOKEN': 'fdc0fea20cf0a734c5e2de1886fc07b4',
    # base face matching confidence threshold
    'CONFIDENCE_THRESHOLD': 0.739,
    # episodes specific matching threshold that is used to join faces in an_
→episode
    'EPISODES_THRESHOLD': 0.689,
    # minimum face quality sufficient to add it to a dossier
    'MINIMUM_DOSSIER_QUALITY': -2,
    # skip all unmatched faces
    'IGNORE_UNMATCHED': False,
    # matched events older than EVENTS_MAX_MATCHED_AGE will be automatically
    # deleted (every night at 1:17 am by default)
    'EVENTS_MAX_MATCHED_AGE': 30,
    # same as above but for unmatched events
    'EVENTS_MAX_UNMATCHED_AGE': 30,
    # same as EVENTS_MAX_MATCHED_AGE but for matched full frame images only_
→(thumbnails won't be deleted)
    'EVENTS_MAX_FULLFRAME_UNMATCHED_AGE': 30,
    # same as above but for unmatched full frame images only (thumbnails won
→'t be deleted)
    'EVENTS_MAX_FULLFRAME_MATCHED_AGE': 30,

```

(continues on next page)

(continued from previous page)

```

# NTLS licence server url
'NTLS_HTTP_URL': 'http://127.0.0.1:3185',
# findface-video-worker face posting address,
# it must be set to either FFSecurity EXTERNAL_ADDRESS (by default)
# or findface-facerouter url (in some specific cases)
'ROUTER_URL': 'http://127.0.0.1',
# send serialized dossiers, dossier-lists, camera and camera groups in_
↪webhooks
'VERBOSE_WEBHOOKS': False,
'THUMBNAIL_JPEG_QUALITY': 75,
# FFServer services urls
'VIDEO_MANAGER_ADDRESS': 'http://127.0.0.1:18810',
'SF_API_ADDRESS': 'http://127.0.0.1:18411',
'FFCOUNTER_ADDRESS': 'http://127.0.0.1:17300',
# additional events features.
# make sure that corresponding extractors
# are licensed and enabled at findface-extraction-api config file.
# available features are: gender, age, emotions, beard, glasses, medmask.
'EVENTS_FEATURES': [],
# feature specific confidence thresholds
'LIVENESS_THRESHOLD': 0.75,
'EMOTIONS_THRESHOLD': 0.25,
'BEARD_THRESHOLD': 0.7,
# -- Persons configuration --
# rrule (recurrence rule) for scheduling persons clusterization
'PERSONS_CLUSTERIZATION_SCHEDULE': 'RRULE:FREQ=DAILY;INTERVAL=1;WKST=MO;
↪BYHOUR=0;BYMINUTE=0',
# face to person matching confidence threshold
'PERSONS_CONFIDENCE_THRESHOLD': 0.739,
# minimum face quality for handle face in person service
'PERSON_EVENT_MIN_QUALITY': -2,
# counters full frame saving options:
# `always` - save always
# `detect` - save only if faces or silhouettes have been detected
# `never` - never save full frames
'COUNTERS_SAVE_FULLFRAME': 'always',
'COUNTERS_FULLFRAME_JPEG_QUALITY': 75,
'COUNTERS_THUMBNAIL_JPEG_QUALITY': 75,
# -- Optional parameters --
# Edit CUSTOM_FIELDS section to customize dossier content.
# Below is an example for integration FindFace Security with Sigur.
# 'CUSTOM_FIELDS': {
#     'dossier_meta': {
#         'items': [
#             {
#                 'name': 'personid',
#                 'default': '',
#                 'label': 'PersonID',
#                 'display': ['list', 'form'],
#                 'description': 'Sigur person ID'
#             },
#             {
#                 'name': 'firstname',
#                 'default': '',
#                 'label': 'First Name',
#                 'display': ['list', 'form'],
#                 'description': 'Sigur first name'
#             }
#         ]
#     }
# }

```

(continues on next page)

(continued from previous page)

```

#         },
#         {
#             'name': 'lastname',
#             'default': '',
#             'label': 'Last Name',
#             'display': ['list', 'form'],
#             'description': 'Sigur last name'
#         },
#         {
#             'name': 'version',
#             'default': '',
#             'label': 'Version',
#             'display': ['list', 'form'],
#             'description': 'Sigur photo version'
#         }
#     ],
#     'filters': [
#         {
#             'name': 'personid',
#             'label': 'Sigur person ID filter',
#             'field': 'personid'
#         }
#     ]
# },
# maximum event age in seconds than could be added to an episode.
# 'EPISODE_SEARCH_INTERVAL': 60,
# If none of these events matched, new episode is created.
# maximum episode duration (episode is closed after)
# 'EPISODE_MAX_DURATION': 300,
# if no new event added to an episode during this timeout, episode will
→be closed.
# 'EPISODE_EVENT_TIMEOUT': 30,
# maximum created thumbnail width
# 'THUMBNAIL_MAX_WIDTH': 320,
# social backend url. Contact support for additional information.
# 'SOCIAL_BACKEND': None,
# 'SOCIAL_HEADERS': {},
# unacknowledged events notification interval
# 'UNACKNOWLEDGED_NOTIFY_INTERVAL': 1,
}
# - FindFace Security user interface configuration dictionary -
FFSECURITY_UI_CONFIG = {
    "event": {
        "features": {
            "f_gender_class": ["male", "female"],
            "age": {
                "f_age_gte": "",
                "f_age_lte": ""
            },
            "f_emotions_class": ["angry", "disgust", "fear", "happy", "sad",
→"surprise", "neutral"],
            "f_glasses_class": ["none", "eye", "sun"],
            "f_beard_class": ["none", "beard"],
            "f_liveness_class": ["real", "fake"],
            "f_medmask_class": ["none", "correct"],
        }
    }
}

```

(continues on next page)

(continued from previous page)

```

    }
}
# -- ASGI-server configuration --
# consult support before changing these settings.
# per worker thread pool size.
ASGI_THREADS = 32
UVICORN_SETTINGS = {
    # worker processes count, 'auto' sets it to logical cpu count
    'workers': 'auto',
    'host': 'localhost',
    'port': 8002,
    # websocket worker processes count,
    # 'auto' sets it to logical cpu count, but not more than 8.
    'ws-workers': 'auto',
    'ws-host': 'localhost',
    'ws-port': 8003,
}
# disable unused services to increase
# overall system performance in some cases.
SERVICES = {
    "ffsecurity": {
        "episodes": True,
        "webhooks": True,
        "persons": False,
        "counters": True,
    }
}
#
# =====
# FINDFACE SECURITY PLUGINS
#
# =====
# Uncomment lines below to enable plugins. Please consult documentation for
# a plugin specific settings.
# ===== Axxon =====
# INSTALLED_APPS.append('ffsecurity_axxon')
# FFSECURITY['AXXON'] = [
#     {
#         'name': 'server_name',
#         'api': 'http://example.com/',
#         'rtsp': 'rtsp://example.com:554/',
#         'user': 'user',
#         'password': 'password',
#     }
# ]
# FFSECURITY_UI_CONFIG['dossier'] = {
#     'video': True,
# }
# ===== Genetec =====
# INSTALLED_APPS.append('ffsecurity_genetec')
# ===== Sova =====
# INSTALLED_APPS.append('ffsecurity_sova')
# ===== CryptoPRO authentication =====
# INSTALLED_APPS.append('ffsecurity_cproauth')
# REST_FRAMEWORK['DEFAULT_AUTHENTICATION_CLASSES'] = [
#     'ffsecurity.auth.TokenAuthentication',
#     'ffsecurity_cproauth.auth.CryptoProOrTokenAuthentication'

```

(continues on next page)

(continued from previous page)

```
# ]
# ===== DossierLists sync =====
# INSTALLED_APPS.append('ffsecurity_sync')
# token must be identical on master and slave
# use pwgen -s 64 1
# SYNC_TOKEN = 'change_me'
# SYNC_TIME = {
#     # 24 hour format
#     'hour': 3,
#     'minute': 0,
# }
```

When configuring findface-security, refer to the following parameters:

Parameter	Description
EXTERNAL_IP	External IP address or URL that will be used to access the FindFace Security web interface.
SERVICE_EXTERNAL_IP	Optional IP address prioritized for webhooks and Genetec integration.
VIDEO_DETECT_TOKEN	To authorize the video face detection module, come up with a token and specify it here.
VIDEO_MANAGER_IP	IP address of the findface-video-manager host.
EVENTS_MAX_MATCHED	The age of matched events at which they are automatically purged from the database.
EVENTS_MAX_UNMATCHED	The age of unmatched events at which they are automatically purged from the database.
EVENTS_MAX_MATCHED_FRAME	Same as <code>EVENTS_MAX_MATCHED_AGE</code> but only for full frames.
EVENTS_MAX_UNMATCHED_FRAME	Same as <code>EVENTS_MAX_UNMATCHED_AGE</code> but only for full frames.
NTLS_HTTP_IP	IP address of the findface-ntls host.
ROUTER_URL	IP address of the findface-security host that will receive detected faces from the findface-video-worker instance(s). Specify either external or internal IP address, subject to the network through which findface-video-worker interacts with findface-security.
EXTRACTION_API_IP	IP address of the findface-extraction-api host.
SF_API_IP	IP address of the findface-sf-api host.
IGNORE_UNMATCHED	Disable logging events for faces which have no match in the dossiers (negative verification result). Set true if the system has to process a large number of faces.
CONFIDENCE_THRESHOLD	Face similarity threshold for verification in events.
EPISODES_THRESHOLD	Face similarity threshold for verification in episodes.
MINIMUM_DOSSIER_QUALITY	Minimum quality of a face in a dossier photo. Photos containing faces of worse quality will be rejected when uploading to a dossier. Upright faces in frontal position are considered the best quality. They result in values around 0, mostly negative (such as -0.00067401276, for example). Inverted faces and large face angles are estimated with negative values some -5 and less. By default, 'MINIMUM_DOSSIER_QUALITY': -2 which is the average quality.
EVENTS_FEATURES	If you enabled recognition models in the findface-extraction-api configuration file, list them here.
LIVENESS_THRESHOLD	The liveness detector will estimate a face liveness with a certain level of confidence. Depending on the confidence threshold, it will return a binary result <code>real</code> or <code>fake</code> .
EMOTIONS_THRESHOLD	Emotions are determined with a certain level of confidence. Depending on the confidence threshold, the system distinguishes emotional faces from neutral ones.
BEARD_THRESHOLD	The presence of a beard on a face is determined with a certain level of confidence. Depending on the confidence threshold, the system returns a binary result <code>none</code> or <code>beard</code> .
EPISODE_SEARCH_INTERVAL	(Add manually for Episodes) The period of time preceding an event, within which the system searches the biometric database for events with similar faces. If no such an event is found, the system creates a new episode. Otherwise, it picks up the most relevant event from a LIVE episode after sorting out the 100 most recent similar faces. See Configure Episodes .
EPISODE_MAX_DURATION	(Add manually for Episodes) The maximum episode duration in seconds. After this time, an episode automatically closes.
EPISODE_EVENT_INTERVAL	(Add manually for Episodes) The maximum time in seconds since the last event has been added to an episode. After this time, an episode automatically closes.
CUSTOM_FIELDS	Add this section manually to customize dossier content. See Dossier Custom Tabs, Fields, and Filters for details.
VERBOSE_WEBHOOKS	Send serialized dossiers, watch lists, camera, and camera groups in webhooks.
THUMBNAIL_QUALITY	Thumbnail JPEG quality.
THUMBNAIL_WIDTH	Maximum thumbnail width.
DATABASES (section)	Database settings. Fill in as such: 'PORT': 5439, 'USER': 'ntech', 'PASSWORD': '<password from /etc/pgbouncer/userlist.txt>'

Warning: The FFSECURITY section must end with the EVENTS_FEATURES/ LIVENESS_THRESHOLD/ EMOTIONS_THRESHOLD / BEARD_THRESHOLD parameters which have to be given in this very order.

```
...
'SF_API_ADDRESS': 'http://127.0.0.1:18411',
'EVENTS_FEATURES': ['gender', 'age', 'emotions', 'beard', 'glasses', 'medmask'],
'LIVENESS_THRESHOLD': 0.945,
'EMOTIONS_THRESHOLD': 0.25
'BEARD_THRESHOLD': 0.7,
```

findface-facerouter

Important: The findface-facerouter is not included in the FindFace Security standard configuration. Use it for integration if necessary. See *Plugins*.

The findface-facerouter service sets processing directives for faces detected in video. The directives are set through custom plugins.

The findface-facerouter service accepts a face bbox and normalized image along with the original image and other data (for example, the detection date and time) from the findface-video-worker service. In general, findface-facerouter allows you to apply arbitrary face processing directives, including directly sending faces to a partner application. In the basic configuration, findface-facerouter is pre-configured to redirect faces to findface-sf-api for further processing, but you will still have to set processing directives by creating a plugin.

Functionality:

- sets processing directives for faces detected in video,
- redirects faces detected in video to findface-sf-api or other service (including a third-party application) for further processing.

The findface-facerouter configuration is done through a configuration file `/etc/findface-facerouter.py`.

```
# main.py options:

# debug                                = False
## debug - debug mode
# detector                             = ''
## detector - Detector to use if client fails to provide normalized face
## (nnd).Use "nnd" if you need to detect faces in such requests. Empty value
## rejects requests without face0.
# host                                 = ''
## host - host to listen
# port                                 = 18820
## port - port to listen
# sfapi_url                            = 'http://localhost:18411'
## sfapi_url - SF-API URL
# version                              = False
## version - print version

# plugin_dir.py options:

# plugin_dir                           = ''
```

(continues on next page)

(continued from previous page)

```

## plugin_dir - Plugin directory for plugin_source='dir'

# abstract_define.py options:

# plugin_source                = 'dir'
## plugin_source - Plugin source (dir)

# log.py options:

# log_file_max_size            = 100000000
## log_file_max_size - max size of log files before rollover
# log_file_num_backups         = 10
## log_file_num_backups - number of log files to keep
# log_file_prefix               = None
## log_file_prefix - Path prefix for log files. Note that if you are running
## multiple tornado processes, log_file_prefix must be different for each of
## them (e.g. include the port number)
# log_rotate_interval          = 1
## log_rotate_interval - The interval value of timed rotating
# log_rotate_mode               = 'size'
## log_rotate_mode - The mode of rotating files (time or size)
# log_rotate_when               = 'midnight'
## log_rotate_when - specify the type of TimedRotatingFileHandler interval other
## options: ('S', 'M', 'H', 'D', 'W0'-'W6')
# log_to_stderr                 = None
## log_to_stderr - Send log output to stderr (colorized if possible). By default
## use stderr if --log_file_prefix is not set and no other logging is
## configured.
# logging                       = 'info'
## logging - Set the Python log level. If 'none', tornado won't touch the
## logging configuration.

```

When configuring findface-facerouter, refer to the following parameters:

Parameter	Description
sfapi_url	IP address and port of the findface-sf-api host.
plugin_dir	Directory with plugins to define face processing directives.

1.9.3 Installation File

FindFace Security installation configuration is automatically saved to a file `/tmp/<findface-installer-*>.json`. You can edit this file and use it to install FindFace Security on other hosts without having to answer the installation questions again.

Tip: See *Deploy from Console Installer* to learn more about the FindFace Security installer.

Important: Be sure to remove fields `*.config`, `exp_ip`, and `int_ip` before installing FindFace Security on a host with a different IP address.

Here is an example of the installation file:

```

{
  "findface-tarantool-server.config": {
    "shard-003": {
      "TNT_FF_LISTEN_PORT": "8103",
      "TNT_META_SCHEME": "meta_scheme",
      "TNT_FF_LISTEN_IP": "127.0.0.1",
      "TNT_EXTRA_LUA": "\ndofile(\"/etc/ffsecurity/tnt_schema.lua\")\n",
      "TNT_FF_NTLS": "127.0.0.1:3133",
      "TNT_DATA_DIR": "/opt/ntech/var/lib/tarantool/shard-003",
      "TNT_LISTEN": "127.0.0.1:32003",
      "TNT_META_INDEXES": "meta_indexes"
    },
    "shard-004": {
      "TNT_FF_LISTEN_PORT": "8104",
      "TNT_META_SCHEME": "meta_scheme",
      "TNT_FF_LISTEN_IP": "127.0.0.1",
      "TNT_EXTRA_LUA": "\ndofile(\"/etc/ffsecurity/tnt_schema.lua\")\n",
      "TNT_FF_NTLS": "127.0.0.1:3133",
      "TNT_DATA_DIR": "/opt/ntech/var/lib/tarantool/shard-004",
      "TNT_LISTEN": "127.0.0.1:32004",
      "TNT_META_INDEXES": "meta_indexes"
    },
    "shard-008": {
      "TNT_FF_LISTEN_PORT": "8108",
      "TNT_META_SCHEME": "meta_scheme",
      "TNT_FF_LISTEN_IP": "127.0.0.1",
      "TNT_EXTRA_LUA": "\ndofile(\"/etc/ffsecurity/tnt_schema.lua\")\n",
      "TNT_FF_NTLS": "127.0.0.1:3133",
      "TNT_DATA_DIR": "/opt/ntech/var/lib/tarantool/shard-008",
      "TNT_LISTEN": "127.0.0.1:32008",
      "TNT_META_INDEXES": "meta_indexes"
    },
    "shard-001": {
      "TNT_FF_LISTEN_PORT": "8101",
      "TNT_META_SCHEME": "meta_scheme",
      "TNT_FF_LISTEN_IP": "127.0.0.1",
      "TNT_EXTRA_LUA": "\ndofile(\"/etc/ffsecurity/tnt_schema.lua\")\n",
      "TNT_FF_NTLS": "127.0.0.1:3133",
      "TNT_DATA_DIR": "/opt/ntech/var/lib/tarantool/shard-001",
      "TNT_LISTEN": "127.0.0.1:32001",
      "TNT_META_INDEXES": "meta_indexes"
    },
    "shard-006": {
      "TNT_FF_LISTEN_PORT": "8106",
      "TNT_META_SCHEME": "meta_scheme",
      "TNT_FF_LISTEN_IP": "127.0.0.1",
      "TNT_EXTRA_LUA": "\ndofile(\"/etc/ffsecurity/tnt_schema.lua\")\n",
      "TNT_FF_NTLS": "127.0.0.1:3133",
      "TNT_DATA_DIR": "/opt/ntech/var/lib/tarantool/shard-006",
      "TNT_LISTEN": "127.0.0.1:32006",
      "TNT_META_INDEXES": "meta_indexes"
    },
    "shard-005": {
      "TNT_FF_LISTEN_PORT": "8105",
      "TNT_META_SCHEME": "meta_scheme",
      "TNT_FF_LISTEN_IP": "127.0.0.1",
      "TNT_EXTRA_LUA": "\ndofile(\"/etc/ffsecurity/tnt_schema.lua\")\n",

```

(continues on next page)

(continued from previous page)

```

    "TNT_FF_NTLS": "127.0.0.1:3133",
    "TNT_DATA_DIR": "/opt/ntech/var/lib/tarantool/shard-005",
    "TNT_LISTEN": "127.0.0.1:32005",
    "TNT_META_INDEXES": "meta_indexes"
  },
  "shard-002": {
    "TNT_FF_LISTEN_PORT": "8102",
    "TNT_META_SCHEME": "meta_scheme",
    "TNT_FF_LISTEN_IP": "127.0.0.1",
    "TNT_EXTRA_LUA": "\ndofile(\"/etc/ffsecurity/tnt_schema.lua\")\n",
    "TNT_FF_NTLS": "127.0.0.1:3133",
    "TNT_DATA_DIR": "/opt/ntech/var/lib/tarantool/shard-002",
    "TNT_LISTEN": "127.0.0.1:32002",
    "TNT_META_INDEXES": "meta_indexes"
  },
  "shard-007": {
    "TNT_FF_LISTEN_PORT": "8107",
    "TNT_META_SCHEME": "meta_scheme",
    "TNT_FF_LISTEN_IP": "127.0.0.1",
    "TNT_EXTRA_LUA": "\ndofile(\"/etc/ffsecurity/tnt_schema.lua\")\n",
    "TNT_FF_NTLS": "127.0.0.1:3133",
    "TNT_DATA_DIR": "/opt/ntech/var/lib/tarantool/shard-007",
    "TNT_LISTEN": "127.0.0.1:32007",
    "TNT_META_INDEXES": "meta_indexes"
  }
},
"findface-video-worker.variant": "cpu",
"product": "security",
"ignore_nolicense": true,
"findface-sf-api.config": {
  "extraction-api": {
    "extraction-api": "http://127.0.0.1:18666"
  },
  "limits": {
    "allow-return-facen": true
  },
  "listen": "127.0.0.1:18411",
  "storage-api": {
    "shards": [
      {
        "slave": "",
        "master": "http://127.0.0.1:8101/v2/"
      },
      {
        "slave": "",
        "master": "http://127.0.0.1:8102/v2/"
      },
      {
        "slave": "",
        "master": "http://127.0.0.1:8103/v2/"
      },
      {
        "slave": "",
        "master": "http://127.0.0.1:8104/v2/"
      },
      {
        "slave": ""
      }
    ]
  }
}

```

(continues on next page)

(continued from previous page)

```

        "master": "http://127.0.0.1:8105/v2/"
    },
    {
        "slave": "",
        "master": "http://127.0.0.1:8106/v2/"
    },
    {
        "slave": "",
        "master": "http://127.0.0.1:8107/v2/"
    },
    {
        "slave": "",
        "master": "http://127.0.0.1:8108/v2/"
    }
]
},
"findface-extraction-api.variant": "cpu",
"memcached.config": {
    "listen_host": "127.0.0.1",
    "max_memory": 1024,
    "item_size": 16
},
"type": "stand-alone",
"findface-video-worker.config": {
    "streamer": [
        "port = 18999",
        "url = 127.0.0.1:18999"
    ],
    "FKVD_WRK_CAP": "10",
    "FKVD_MGR_ADDR": "127.0.0.1:18811",
    "FKVD_NTLS_ADDR": "127.0.0.1:3133"
},
"findface-security.config": {
    "SERVICE_EXTERNAL_ADDRESS": "http://172.17.46.98",
    "FFSECURITY": {
        "ROUTER_URL": "http://127.0.0.1"
    },
    "ntech_password": "dGPOQc3yTAKbpa9jP5BueakzxJWch61I"
},
"findface-counter.config": {
    "listen": "127.0.0.1:17300",
    "database": {
        "connection_string": "dbname=ffcounter host=/var/run/postgresql sslmode=disable"
    }
},
"findface-extraction-api.config": {
    "extractors": {
        "models": {
            "quality": "faceattr/quality.v0.cpu.fnk",
            "face": "face/ifruit_320.cpu.fnk",
            "gender": "",
            "emotions": "",
            "age": ""
        },
        "instances": 2
    }
},

```

(continues on next page)

(continued from previous page)

```

    "normalizers": {
      "instances": 2
    },
    "listen": "127.0.0.1:18666",
    "detectors": {
      "quality_estimator": true,
      "instances": 2
    },
    "license_ntls_server": "127.0.0.1:3133"
  },
  "inter_ip.advertised": "127.0.0.1",
  "findface-ntls.config": {
    "NTLS_LISTEN_UI": "127.0.0.1:3185",
    "NTLS_LICENSE_DIR": "/opt/ntech/license",
    "NTLS_LISTEN": "127.0.0.1:3133"
  },
  "facen_model": "face/ifruit_320.cpu.fnk",
  "ext_ip.advertised": "172.17.46.98",
  "findface-data.models": [
    "./findface-data-age.v1-cpu_3.0.0_all.deb",
    "./findface-data-age.v1-gpu_3.0.0_all.deb",
    "./findface-data-beard.v0-cpu_3.0.0_all.deb",
    "./findface-data-beard.v0-gpu_3.0.0_all.deb",
    "./findface-data-detector-cheetah-cpu_3.0.0_all.deb",
    "./findface-data-detector-cheetah-fast-cpu_3.0.0_all.deb",
    "./findface-data-detector-cheetah-fast-gpu_3.0.0_all.deb",
    "./findface-data-detector-cheetah-gpu_3.0.0_all.deb",
    "./findface-data-detector-mtcnn-cpu_3.0.0_all.deb",
    "./findface-data-emotions.v1-cpu_3.0.0_all.deb",
    "./findface-data-emotions.v1-gpu_3.0.0_all.deb",
    "./findface-data-gender.v2-cpu_3.0.0_all.deb",
    "./findface-data-gender.v2-gpu_3.0.0_all.deb",
    "./findface-data-glasses3.v0-cpu_3.0.0_all.deb",
    "./findface-data-glasses3.v0-gpu_3.0.0_all.deb",
    "./findface-data-ifruit-160-cpu_3.0.0_all.deb",
    "./findface-data-ifruit-160-gpu_3.0.0_all.deb",
    "./findface-data-ifruit-320-cpu_3.0.0_all.deb",
    "./findface-data-ifruit-320-gpu_3.0.0_all.deb",
    "./findface-data-liveness.v3-cpu_3.0.0_all.deb",
    "./findface-data-liveness.v3-gpu_3.0.0_all.deb",
    "./findface-data-medmask3.v1-cpu_3.0.0_all.deb",
    "./findface-data-medmask3.v1-gpu_3.0.0_all.deb",
    "./findface-data-normalization-ant.v2-cpu_3.0.0_all.deb",
    "./findface-data-normalization-ant.v2-gpu_3.0.0_all.deb",
    "./findface-data-normalization-bee-fast-cpu_3.0.0_all.deb",
    "./findface-data-normalization-bee-fast-gpu_3.0.0_all.deb",
    "./findface-data-normalization-bee.v2-cpu_3.0.0_all.deb",
    "./findface-data-normalization-bee.v2-gpu_3.0.0_all.deb",
    "./findface-data-normalization-crop2x.v2-maxsize400-cpu_3.0.0_all.deb",
    "./findface-data-normalization-crop2x.v2-maxsize400-gpu_3.0.0_all.deb",
    "./findface-data-pedet-edie-rc2-cpu_3.0.0_all.deb",
    "./findface-data-pedet-edie-rc2-gpu_3.0.0_all.deb",
    "./findface-data-quality.v0-cpu_3.0.0_all.deb",
    "./findface-data-quality.v0-gpu_3.0.0_all.deb"
  ],
  "python3-pil.variant": "avx2",
  "components": [

```

(continues on next page)

(continued from previous page)

```

    "findface-data",
    "memcached",
    "etcd",
    "redis",
    "postgresql",
    "pgbouncer",
    "jq",
    "python3-pil",
    "findface-ntls",
    "findface-extraction-api",
    "findface-sf-api",
    "findface-counter",
    "findface-upload",
    "findface-video-manager",
    "findface-video-worker",
    "findface-security",
    "findface-tarantool-server"
  ],
  "pgbouncer.config": {
    "ntech_password": "dGPOQc3yTAKbpa9jP5BueakzxJWcH61I"
  },
  "findface-facerouter.config": {
    "host": "127.0.0.1",
    "plugin_source": "dir",
    "port": "18820",
    "sfapi_url": "http://127.0.0.1:18411",
    "plugin_dir": "/etc/findface-facerouter-plugins"
  },
  "tnt_instances": 8,
  "postgresql.config": {
    "ntech_password": "dGPOQc3yTAKbpa9jP5BueakzxJWcH61I"
  },
  "inter_ip.bind": "127.0.0.1",
  "findface-video-manager.config": {
    "ntls": {
      "url": "http://127.0.0.1:3185/",
      "enabled": false
    },
    "rpc": {
      "listen": "127.0.0.1:18811"
    },
    "listen": "127.0.0.1:18810",
    "master": {
      "self_url_http": "127.0.0.1:18810",
      "self_url": "127.0.0.1:18811"
    }
  },
  "ext_ip.bind": "0.0.0.0"
}

```

1.9.4 Neural Network Models

Here you can see a summary for neural network models created by our Lab and used in FindFace Security:

Note: The CPU and GPU benchmark setup is the following:

- CPU - Intel® Core™ i7-5930K CPU @ 3.50GHz × 12
- GPU - GeForce GTX 1080

Important: The default face biometrics model upon a clean install is ifruit_320.

Model	CPU, FPS	GPU, FPS	Type
face/ifruit_160	Benchmark test in progress		Face biometrics
face/ifruit_320	Benchmark test in progress		
faceattr/age.v1	14.99	529.35	Age recognition
faceattr/beard.v0	15.03	532.05	Beard recognition
faceattr/emotions.v1	10.99	235.59	Emotions recognition
faceattr/gender.v2	15.01	523.22	Gender recognition
faceattr/glasses3.v0	15.01	529.64	Glasses recognition
faceattr/medmask3.v1			Face mask detection

1.9.5 FindFace Security Data Storages

In this section:

- *List of Storages*
- *Biometric Database Galleries*

List of Storages

FindFace Security uses the following data storages:

- Tarantool-based biometric database that stores biometric samples (feature vectors) and face identification events.
- Main system database based on PostgreSQL, that stores internal system data, dossiers, user accounts, and camera settings.
- Directory `/var/lib/ffsecurity/uploads` that stores uploaded dossier photos, video files, and such event artifacts as full frames, face thumbnails, and normalized face images.
- Directory `/var/lib/ffupload/` that stores only such event artifacts as face thumbnails.

Biometric Database Galleries

There are 3 galleries in the Tarantool-based biometric database:

- `ffsec_dossier_face`: biometric samples extracted from dossier photos.
- `ffsec_events`: biometric samples extracted from faces detected in the video.
- `ffsec_persons`: centroids of persons (virtual biometric samples averaged across all person's faces) and metadata.

1.9.6 Backup Options

To backup the biometric database, you need the `findface-storage-api-dump` utility. It can be launched with the following options:

Note: You can find the detailed information on the `findface-storage-api-dump` usage in *Backup and Restore Data Storages*.

```
findface-storage-api-dump --help

Usage of findface-storage-api-dump:
  -cache string
    Cache type: inmemory, redis or memcache (default "memcache")
  -cache-inmemory-size int
    Maximum number of items in ARC cache (default 16384)
  -cache-memcache-nodes value
    Comma-separated list of memcache shards (default 127.0.0.1:11211)
  -cache-memcache-timeout duration
    Specifies read/write timeout (default 100ms)
  -cache-redis-addr string
    Host:Port address (default "localhost:6379")
  -cache-redis-db int
    Database to be selected after connecting to the server.
  -cache-redis-network string
    Network type, either tcp or unix (default "tcp")
  -cache-redis-password string
    Optional password. Must match the password specified in the requirepass_
↪server configuration option.
  -cache-redis-timeout duration
    Specifies dial/read/write timeout (default 5s)
  -config string
    Path to config file
  -config-template
    Output config template and exit
  -continue-on-errors
    Continue on errors instead of exiting
  -cpu-profile string
    Enable CPU profile and set output file
  -extraction-api-extraction-api string
    Extraction API address (default "http://127.0.0.1:18666")
  -extraction-api-timeouts-connect duration
    extraction-api-timeouts-connect (default 5s)
  -extraction-api-timeouts-idle-connection duration
    extraction-api-timeouts-idle-connection (default 10s)
  -extraction-api-timeouts-overall duration
    extraction-api-timeouts-overall (default 35s)
  -extraction-api-timeouts-response-header duration
    extraction-api-timeouts-response-header (default 30s)
  -limits-allow-return-facen
    Allow returning raw feature vectors to detect responses if ?return_facen=true
  -limits-body-image-length int
    Maximum length of image supplied in request body (default 33554432)
  -limits-deny-networks string
    Comma-separated list of subnets that are not allowed to fetch from (default
↪"127.0.0.0/8,192.168.0.0/16,10.0.0.0/8,::1/128,fe00::/8")
  -limits-url-length int
```

(continues on next page)

(continued from previous page)

```

        Maximum supported url length in bytes (default 4096)
-listen string
    IP:port to listen on (default ":18411")
-normalized-storage-enabled
    Enables normalize saving (default true)
-normalized-storage-s3-access-key string
    Access key for the object storage
-normalized-storage-s3-bucket-name string
    S3 storage bucket name
-normalized-storage-s3-endpoint string
    S3 compatible object storage endpoint
-normalized-storage-s3-operation-timeout int
    Storage operations (Get,Put,Delete) timeout in seconds (default 30)
-normalized-storage-s3-public-url string
    Storage public url
-normalized-storage-s3-region string
    Storage region
-normalized-storage-s3-secret-access-key string
    Secret key for the object storage
-normalized-storage-s3-secure
    If 'true' API requests will be secure (HTTPS), and insecure (HTTP) otherwise
→ (default true)
-normalized-storage-webdav-timeouts-connect duration
    normalized-storage-webdav-timeouts-connect (default 5s)
-normalized-storage-webdav-timeouts-idle-connection duration
    normalized-storage-webdav-timeouts-idle-connection (default 10s)
-normalized-storage-webdav-timeouts-overall duration
    normalized-storage-webdav-timeouts-overall (default 35s)
-normalized-storage-webdav-timeouts-response-header duration
    normalized-storage-webdav-timeouts-response-header (default 30s)
-normalized-storage-webdav-upload-url string
    webdav storage for normalized, disable normalized if empty string (default
→ "http://127.0.0.1:3333/uploads/")
-normalized_storage string
    Normalized storage type: webdav, s3 (default "webdav")
-output-dir string
    Output directory (default ".")
-storage-api-max-idle-conns-per-host int
    storage-api-max-idle-conns-per-host (default 20)
-storage-api-timeouts-connect duration
    storage-api-timeouts-connect (default 5s)
-storage-api-timeouts-idle-connection duration
    storage-api-timeouts-idle-connection (default 10s)
-storage-api-timeouts-overall duration
    storage-api-timeouts-overall (default 35s)
-storage-api-timeouts-response-header duration
    storage-api-timeouts-response-header (default 30s)

```

1.9.7 Restore Options

To restore the biometric database from a backup, you need the `findface-storage-api-restore` utility. It can be launched with the following options:

Note: You can find the detailed information on the `findface-storage-api-restore` usage in [Backup and](#)

Restore Data Storages.

```
findface-storage-api-restore --help

Usage of findface-storage-api-restore:
  -cache string
      Cache type: inmemory, redis or memcache (default "memcache")
  -cache-inmemory-size int
      Maximum number of items in ARC cache (default 16384)
  -cache-memcache-nodes value
      Comma-separated list of memcache shards (default 127.0.0.1:11211)
  -cache-memcache-timeout duration
      Specifies read/write timeout (default 100ms)
  -cache-redis-addr string
      Host:Port address (default "localhost:6379")
  -cache-redis-db int
      Database to be selected after connecting to the server.
  -cache-redis-network string
      Network type, either tcp or unix (default "tcp")
  -cache-redis-password string
      Optional password. Must match the password specified in the requirepass_
↪server configuration option.
  -cache-redis-timeout duration
      Specifies dial/read/write timeout (default 5s)
  -config string
      Path to config file
  -config-template
      Output config template and exit
  -cpu-profile string
      Enable CPU profile and set output file
  -dont-create-gallery
      Don't create gallery, fail if doesn't exist
  -extraction-api-extraction-api string
      Extraction API address (default "http://127.0.0.1:18666")
  -extraction-api-timeouts-connect duration
      extraction-api-timeouts-connect (default 5s)
  -extraction-api-timeouts-idle-connection duration
      extraction-api-timeouts-idle-connection (default 10s)
  -extraction-api-timeouts-overall duration
      extraction-api-timeouts-overall (default 35s)
  -extraction-api-timeouts-response-header duration
      extraction-api-timeouts-response-header (default 30s)
  -limits-allow-return-facen
      Allow returning raw feature vectors to detect responses if ?return_facen=true
  -limits-body-image-length int
      Maximum length of image supplied in request body (default 33554432)
  -limits-deny-networks string
      Comma-separated list of subnets that are not allowed to fetch from (default
↪"127.0.0.0/8,192.168.0.0/16,10.0.0.0/8,::1/128,fe00::/8")
  -limits-url-length int
      Maximum supported url length in bytes (default 4096)
  -listen string
      IP:port to listen on (default ":18411")
  -normalized-storage-enabled
      Enables normalize saving (default true)
  -normalized-storage-s3-access-key string
      Access key for the object storage
```

(continues on next page)

(continued from previous page)

```

-normalized-storage-s3-bucket-name string
    S3 storage bucket name
-normalized-storage-s3-endpoint string
    S3 compatible object storage endpoint
-normalized-storage-s3-operation-timeout int
    Storage operations (Get,Put,Delete) timeout in seconds (default 30)
-normalized-storage-s3-public-url string
    Storage public url
-normalized-storage-s3-region string
    Storage region
-normalized-storage-s3-secret-access-key string
    Secret key for the object storage
-normalized-storage-s3-secure
    If 'true' API requests will be secure (HTTPS), and insecure (HTTP) otherwise
↪(default true)
-normalized-storage-webdav-timeouts-connect duration
    normalized-storage-webdav-timeouts-connect (default 5s)
-normalized-storage-webdav-timeouts-idle-connection duration
    normalized-storage-webdav-timeouts-idle-connection (default 10s)
-normalized-storage-webdav-timeouts-overall duration
    normalized-storage-webdav-timeouts-overall (default 35s)
-normalized-storage-webdav-timeouts-response-header duration
    normalized-storage-webdav-timeouts-response-header (default 30s)
-normalized-storage-webdav-upload-url string
    webdav storage for normalized, disable normalized if empty string (default
↪"http://127.0.0.1:3333/uploads/")
-normalized_storage string
    Normalized storage type: webdav, s3 (default "webdav")
-rename string
    Ignore dump header and use this string as gallery name
-storage-api-max-idle-conns-per-host int
    storage-api-max-idle-conns-per-host (default 20)
-storage-api-timeouts-connect duration
    storage-api-timeouts-connect (default 5s)
-storage-api-timeouts-idle-connection duration
    storage-api-timeouts-idle-connection (default 10s)
-storage-api-timeouts-overall duration
    storage-api-timeouts-overall (default 35s)
-storage-api-timeouts-response-header duration
    storage-api-timeouts-response-header (default 30s)

```


2.1 Web Interface

Use the web interface to interact with FindFace Security. To open the web interface, enter its address in the address bar of your browser, and log in.

Note: Request credentials from administrator.

The web interface has a highly intuitive and handy design and provides the following functionality:

- *Search Databases.*
- *Real-time Face Identification Events.*
- *Dossier* (only for users with operator privileges).
- *Video Wall.*

2.2 Search Databases

FindFace Security allows you to search for faces in the following databases:

- Database of detected faces (the *Events* tab).
- Dossier database (the *Dossiers*). Contains face reference images.

To find a face in a database, navigate to the *Search* tab.

In this chapter:

- *Search for Faces in Event List*
- *Search for Faces in Dossier List*


2.2.1 Search for Faces in Event List

FindFace Security allows you to search the database of detected faces.

Note: You can access this database by navigating to the event list (the *Events* tab).

To find a face, do the following:

1. Navigate to the *Search* tab.

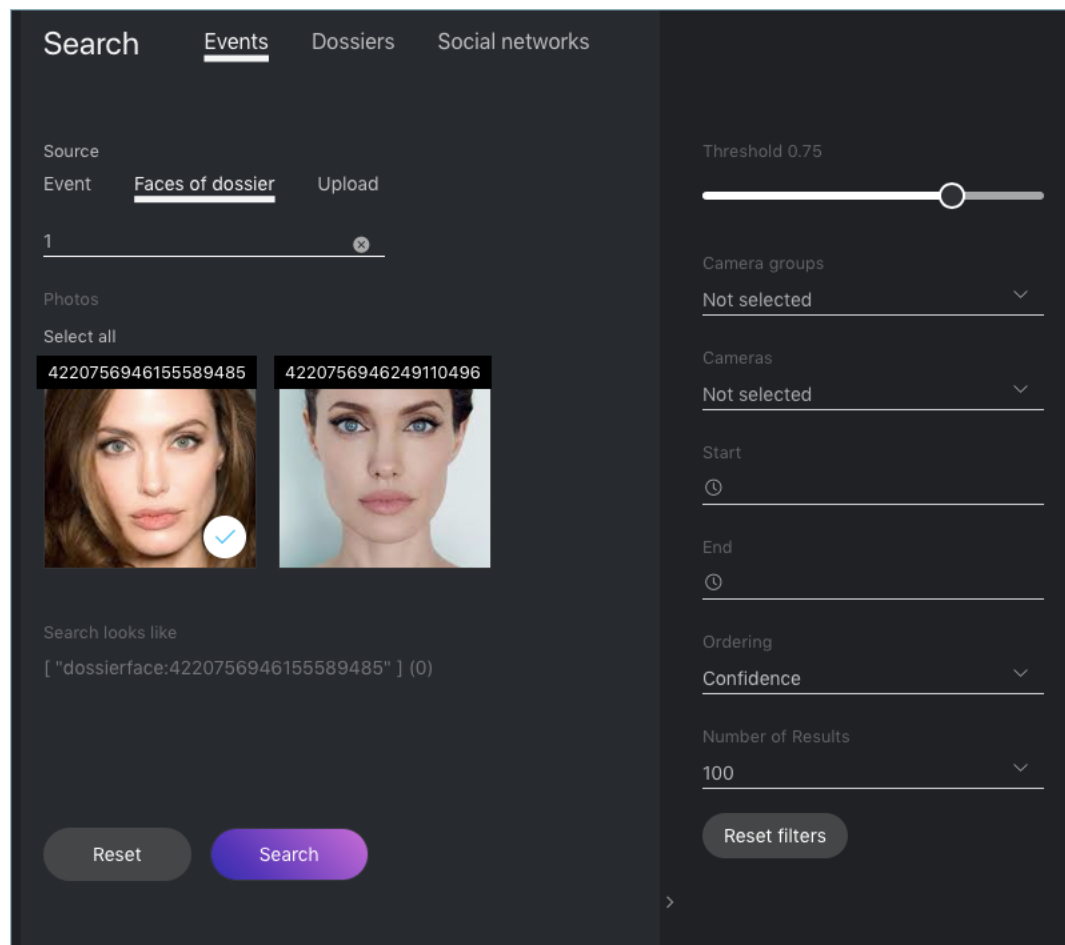

2. Specify a database to search: *Events*.
3. Specify a face to search for in one of the following ways:
 - By event ID with the face.
 - By dossier ID with the face. Should the dossier contain multiple photos, select some of them to use in the search.

- By uploading a photo. It will be displayed in the *Photo* area. If there are multiple faces in the image, select the one of your interest.
4. By default, the system searches for faces using the identification threshold 0.75. If necessary, set your own value using the *Threshold* filter.
 5. (Optional) Specify a group of cameras, camera and a time period within which the event occurred.
 6. Select the method for ordering the search results: by confidence (similarity between faces) or date.
 7. Specify the maximum number of dossiers in the search results.
 8. Click *Search*. You will see the search results appear below. For each face found, the matching confidence level is provided.

2.2.2 Search for Faces in Dossier List

FindFace Security allows you to search the database of dossiers containing face reference images.

To find a face, do the following:

1. Navigate to the *Search* tab.

The screenshot shows the 'Search' interface with the following elements:

- Tabs:** Search, Events, Dossiers, Social networks
- Source:** Event, Faces of dossier, Upload
- Count:** 2 (with a close icon)
- Photos:** Unselect all, 4220953712474270541 (with a photo of a man and a checkmark)
- Search looks like:** ["dossierface:4220953712474270541"] (0)
- Filters:**
 - Threshold 0.75 (slider)
 - Ordering: Confidence (dropdown)
 - Number of Results: 100 (dropdown)
 - Reset filters button
- Buttons:** Reset, Search

2. Specify a database to search: *Dossiers*.
3. Specify a face to search for in one of the following ways:
 - By event ID with the face.
 - By dossier ID with the face. Should the dossier contain multiple photos, select some of them to use in the search.

- By uploading a photo. It will be displayed in the *Photo* area. If there are multiple faces in the image, select the one of your interest.
4. By default, the system searches for faces using the identification threshold 0.75. If necessary, set your own value using the *Threshold* filter.
 5. Select the method for ordering the search results: by confidence (similarity between faces) or date.
 6. Specify the maximum number of dossiers in the search results.
 7. Click *Search*. You will see the search results appear below. For each face found, the matching confidence level is provided.

2.3 Real-time Face Identification Events

To monitor the real-time face identification in live videos, use the *Events* and *Episodes* tabs. Besides monitoring, both tabs allow you to access the history of identification events. This section is all about the *Events*.

Tip: Take your security up a notch with *episodes*.

Tip: Search for faces through the event database and dossier database on the *Search* tab.

Tip: To perform the face identification in archived videos, see *Face Identification in Offline Videos*.


Important: You can *enable sound notifications* for events related to specific watch lists. In some browsers, the tab with events has to remain in focus to get a sound played. To put a tab in focus, open it, and click anywhere on the page.

In this chapter:

- *View Identification Events*
- *Face Liveness and Face Features Recognition*
- *Event Ticket. Acknowledging Event*
- *Event Ticket. Face Search*

2.3.1 View Identification Events


Once a face detected, you will see a notification on the event list.

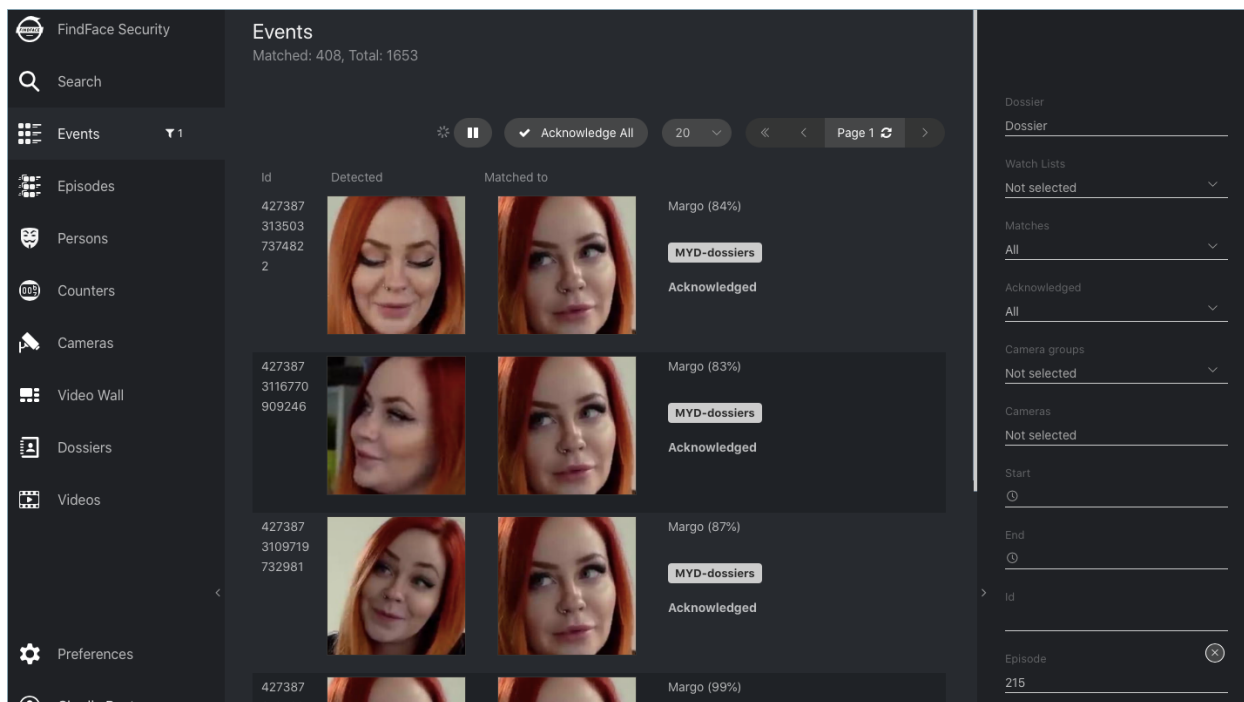

A notification can feature different pieces of information, depending on whether a detected face has a match in the database:

- **Match not found:** a normalized face image, detection date and time, the name of a camera group.
- **Match found:** a normalized face image, the photo from a dossier, the name of a person, similarity between faces, the comment from a dossier, the name of a dossier list, detection date and time, the name of a camera group.

Note: You can configure the system in such a way that you will get notifications only for the faces with a match.

Important: In order to pause the notifications thread, click  above the list of events.

When working with events, the following default filters may come in handy:

- *Dossier:* display events only for a selected dossier.
- *Watch lists:* display events only for a selected dossier category (watch list).

Note: To view only unmatched faces on the event list, select *Unmatched* in this filter.

- *Matches:* display events only with/without matches, or all events.
- *Acknowledged:* display only acknowledged/unacknowledged events, or all events.
- *Cameras:* display only events from a selected camera.
- *Camera groups:* display only events from a selected group of cameras.
- *Start, End:* display only events that occurred within a certain time period.
- *id:* display an event with a given ID.

- *Episode*: display events from the episode with a given ID.

2.3.2 Face Liveness and Face Features Recognition

Depending on the system settings, you can see an estimation of face liveness and/or a result of such face features recognition as gender, age, emotions, glasses, and/or beard.

The face liveness detector automatically spots fake faces and prevents photo attacks by distinguishing a live face from a face image.

Note: The liveness score can be `null`. It is so when the liveness detector is disabled or unable to estimate the face liveness in the provided image.

The face feature recognition result is in the following format:

Face feature	Result format	Example
Age	Feature: age: number of years	age: 33
Gender	Result: male/female (feature: gender): algorithm confidence in result	female (gender): 0.95
Emotions	Result: angry/disgust/fear/happy/sad/surprise/neutral (feature: emotions): algorithm confidence in result	happy (emotions): 0.99
Glasses	Result: eye/sun/none (feature: glasses): algorithm confidence in result	none (glasses): 0.87
Beard	Result: beard/none (feature: beard): algorithm confidence in result	none (beard): 0.91

Events

Matched: 0, Total: 2484

⏸

✓ Acknowledge All

20

« < Page 1 > »

Id	Detected	Matched to	
418245 209874 639092 5		No matches	age: 27 none (beard): 0.03 surprise (emotions): 0.15 female (gender): 1.00 none (glasses): 1.00
		Unmatched	
418245 205015 957157 1		No matches	age: 24 beard (beard): 0.92 happy (emotions): 0.00 male (gender): 1.00 none (glasses): 1.00
		Unmatched	
418245 189554 075073 2		No matches	age: 27 beard (beard): 0.97 angry (emotions): 0.00 male (gender): 1.00 sun (glasses): 0.96
		Unmatched	
418245		No matches	age: 21

Dossier

Dossier

Watch Lists

Not selected

Matches

All

Acknowledged

All

Cameras

Not selected

Camera groups

Not selected

Start

⌚

End

⌚

Id


Age


From

To

Filter events by face features and liveness when needed.

Age

From 

To 

Beard

☐ None

☒ Beard

Emotions

☐ Angry

☐ Disgust

☐ Fear

☐ Happy

☐ Sad

☐ Surprise

☐ Neutral

Gender

☐ Male

☐ Female

Glasses

☐ None

☐ Eye

☐ Sun

Liveness

☐ Real

☐ Fake

Face mask

☐ None

☐ Mask on

2.3.3 Event Ticket. Acknowledging Event

In order to navigate to an event ticket from the list of events, click on the face recognition result in a notification (*No matches* or the name of a matching person).

An event ticket contains the same data as a relevant *notification*. It also allows for acknowledging the event. To do so, click *Not accepted* to change the event acknowledgment status. Click *Save*.

Name
Margo (22) 🔍 + Add Face to Dossier

Confidence
84%

Episode
🔍 215

Comment

Features
no

Time
2020-06-14 21:36:50

Camera
🔍 MYD

Camera group
🔍 MYD-group

Watch lists
MYD-dossiers

Status
Not accepted

Back


Tip: If a detected face has a match in the dossiers, you can navigate into a relevant one by clicking on the person's name in the event ticket.

Tip: In order to acknowledge all the events, click  above the list of events.

Note: Event acknowledgment can be automated for selected watch lists.

2.3.4 Event Ticket. Face Search

FindFace Security allows you to search detected faces through the list of events and dossier database. To navigate from an event ticket to the search tab, click *Events* or *Dossiers* respectively.

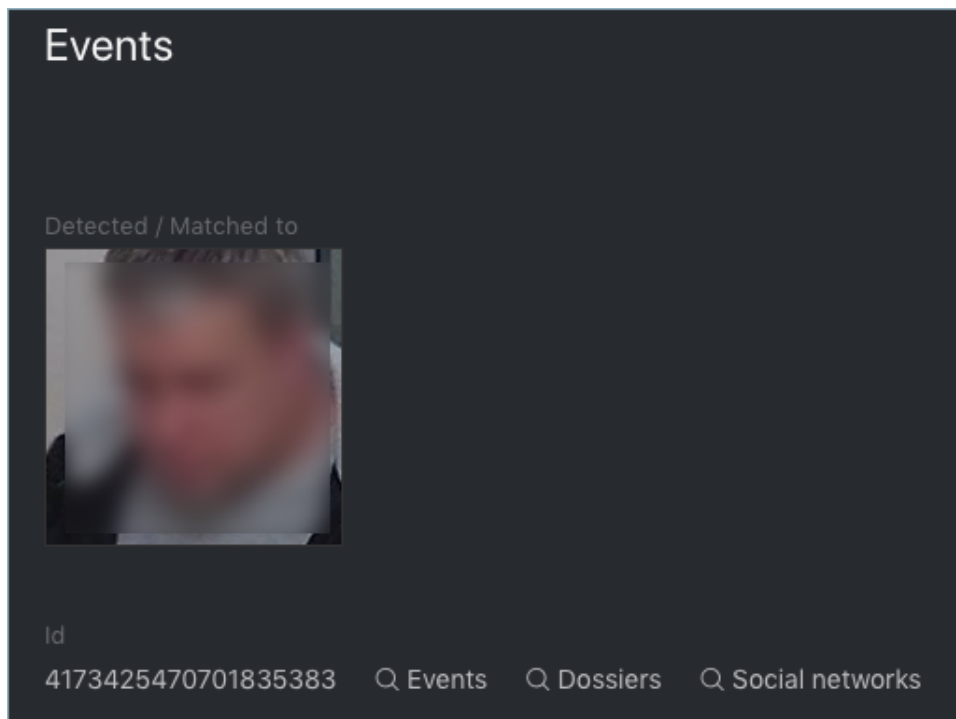

See also:

- [Search Databases.](#)

2.4 Organize Events with Episodes

To monitor the real-time face identification in live videos, use the *Events* and *Episodes* tabs. Besides monitoring, both tabs allow you to access the history of identification events. This section is all about the *Episodes*.

See also:

- [Real-time Face Identification Events](#)
- [Configure Episodes](#)

An episode is a set of identification events that feature faces of the same person, detected within a certain period of time. As events on the *Events* tab show up in an arbitrary order, a large number of miscellaneous events can make the work difficult and unproductive. With the episodes, the system uses AI to organize incoming events based on the faces similarity and detection time. This allows for easy processing of diverse events, even in large numbers.

Tip: Search for faces through the event database and dossier database on the *Search* tab.

Tip: To perform the face identification in archived videos, see *Face Identification in Offline Videos*.

In this chapter:


- *View Identification Episodes*
- *Event and Episode Acknowledging*
- *Filter Events by Episode ID*

2.4.1 View Identification Episodes

There are two types of episodes:

- **LIVE:** an episode is currently active, with more events to be possibly added.
- **Closed:** an episode is closed, no events can be added.

You can find the list of episodes with filters and statistics on the *Episodes* tab. Once a face is detected, it is either added to an existing LIVE episode, or used as a starting point of a new episode. Each episode is assigned an identifier which can be later used to filter events and episodes.

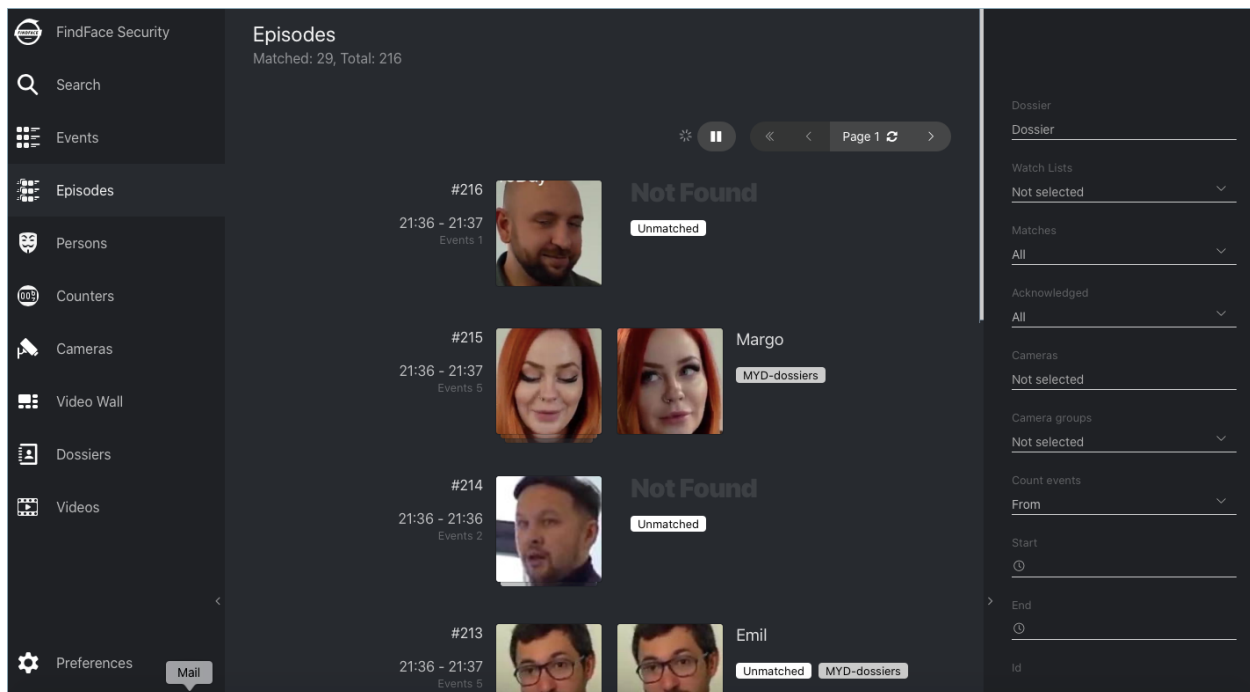

When working with episodes, the following default filters may come in handy:

- **Dossier:** display episodes only for a selected dossier.
- **Watch lists:** display episodes only for a selected dossier category (watch list).

Note: To view only unmatched faces on the episode list, select *Unmatched* in this filter.

- *Matches*: display episodes only with/without matches, or all episodes.
- *Acknowledged*: display only acknowledged/unacknowledged episodes, or all episodes.
- *Cameras*: display only episodes from a selected camera.
- *Camera groups*: display only episodes from a selected group of cameras.
- *Start, End*: display only episodes that occurred within a certain time period.
- *id*: display an episode with a given ID.

You can also filter episodes by face liveness and face features (if applicable).

To view the events added to an episode, click it on the list. You will be redirected to the *Events* tab with the corresponding episode ID set in the *Episode* filter:


The screenshot shows the FindFace Security interface. The main area displays the 'Events' tab with a list of episodes. Each episode entry includes an ID, a 'Detected' image, a 'Matched to' image, and a match percentage. The episodes are filtered by 'Acknowledged' status. The sidebar on the right contains various filters: 'Dossier' (set to 'Dossier'), 'Watch Lists' (set to 'Not selected'), 'Matches' (set to 'All'), 'Acknowledged' (set to 'All'), 'Camera groups' (set to 'Not selected'), 'Cameras' (set to 'Not selected'), 'Start' (set to 'All'), 'End' (set to 'All'), and 'Id' (set to '215'). An orange arrow points to the 'Episode' filter in the sidebar, which is currently set to '215'.

Id	Detected	Matched to	Matched to
427387			Margo (84%)
313503			Margo (83%)
737482			Margo (87%)
2			Margo (99%)

Work with the *Events* tab as described in [Real-time Face Identification Events](#).

2.4.2 Event and Episode Acknowledging

To acknowledge an entire episode, click *Not accepted* for this episode on the list. As a result, all events in the episode will be automatically acknowledged, including those that are yet-to-appear (in the case of a LIVE episode).

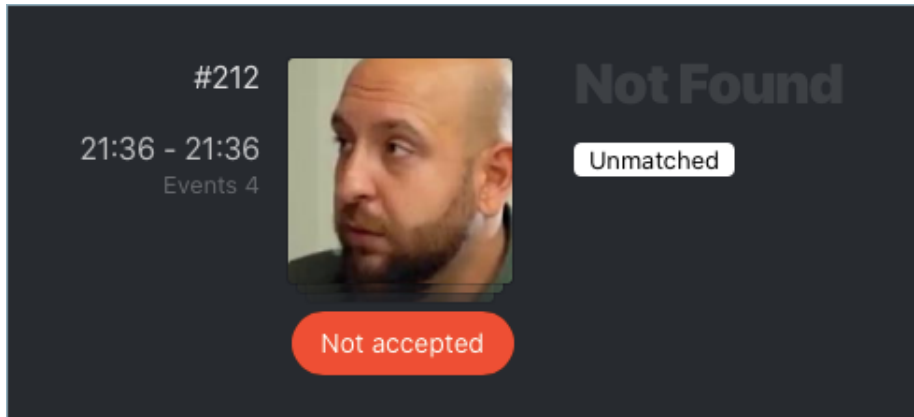

An episode is also automatically acknowledged after acknowledging all its events one by one.

2.4.3 Filter Events by Episode ID

To display events by episode ID, either use the *id* filter on the *Episodes* tab or the *Episode ID* filter on the *Events* tab.

2.5 Dossier

The dossier database contains dossiers on the unwanted persons and VIP guests. A dossier has to contain one or several photos of a person and belong to a certain classification list (watch list).

In this section:

- [Create Dossier](#)
- [View Dossier](#)

2.5.1 Create Dossier




To create a dossier, do the following:

1. Navigate to the *Dossiers* tab.
2. Click +.



Create dossier

Do you have many dossiers? Try Batch Dossier Upload

Photos



Files


 S.docx, 731.48KB



* Name

Lara Croft

Comment

* Watch Lists

Default Watch List 

☒ Active

Save

Back


3. Attach a photo and specify the name of a person. If necessary, add a comment.

Important: A face in the photo must be of high quality, i.e. close to a frontal position. Photos that do not meet the requirement will be rejected with a detailed error description.

Create dossier

Do you have many dossiers? Try [Batch Dossier Upload](#)

Photos



• Name

Lara Croft

Comment

• Watch Lists

Select



PersonID

First Name

Last Name

Version



Active

Save

Back

4. From the *Watch lists* drop-down menu, select a classification list (or several lists, one by one) for the dossier.

Note: If you cannot find an appropriate watch list for the dossier, *create* a new one, or ask an administrator to do so.

5. Check *Active*. If a dossier is inactive, it is excluded from the *real time face identification*.
6. Click *Save*.

2.5.2 View Dossier

You can find all dossiers created in FindFace Security on the *Dossiers* tab. Use the *Watch lists* filter to filter dossiers by list.

2.6 Video Wall


FindFace Security allows for basic video surveillance. Use the Video Wall to display the video image from cameras and video files.

The Video Wall offers two modes, 4 predefined layouts in each:

- video streaming,
- video streaming with face detection and episode feed.

To display video on the Video Wall, do the following:

1. Navigate to the *Video Wall* tab.
2. Select a Video Wall mode and camera layout.

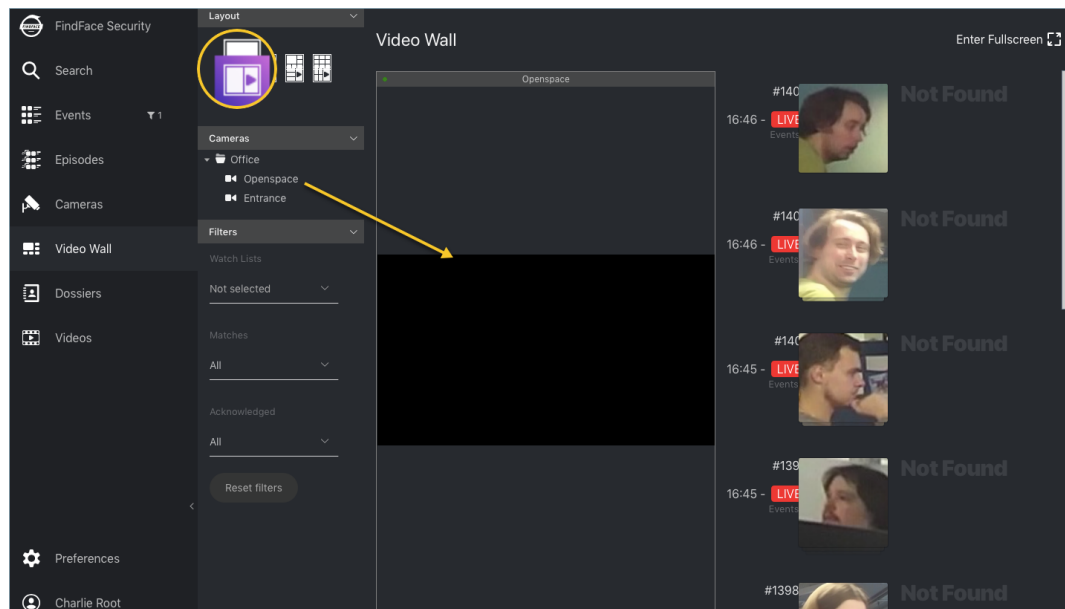

3. Drag-n-drop cameras of your choice to the Video Wall.

You can work with the episode feed on the Video Wall in the *same manner* as with the *Episodes* tab, including the following basic filters:

- *Watch Lists*
- *Matches.*
- *Acknowledged.*

2.7 Mobile App

To interact with FindFace Security on the go, use the mobile app. The FindFace Security app is available on request for Android.

In this section:

- *Recommended System Requirements*
- *Functions*

2.7.1 Recommended System Requirements


- OS: Android 6.

Note: Functioning on versions 4.4-5. is possible but not guaranteed.

- CPU: 2 cores.
- RAM: 2 GB.
- Battery capacity: at least 4000 mAh for an 8-hour shift.

2.7.2 Functions

In the app, specify your login and password, as well as the FindFace Security URL address, and log in.

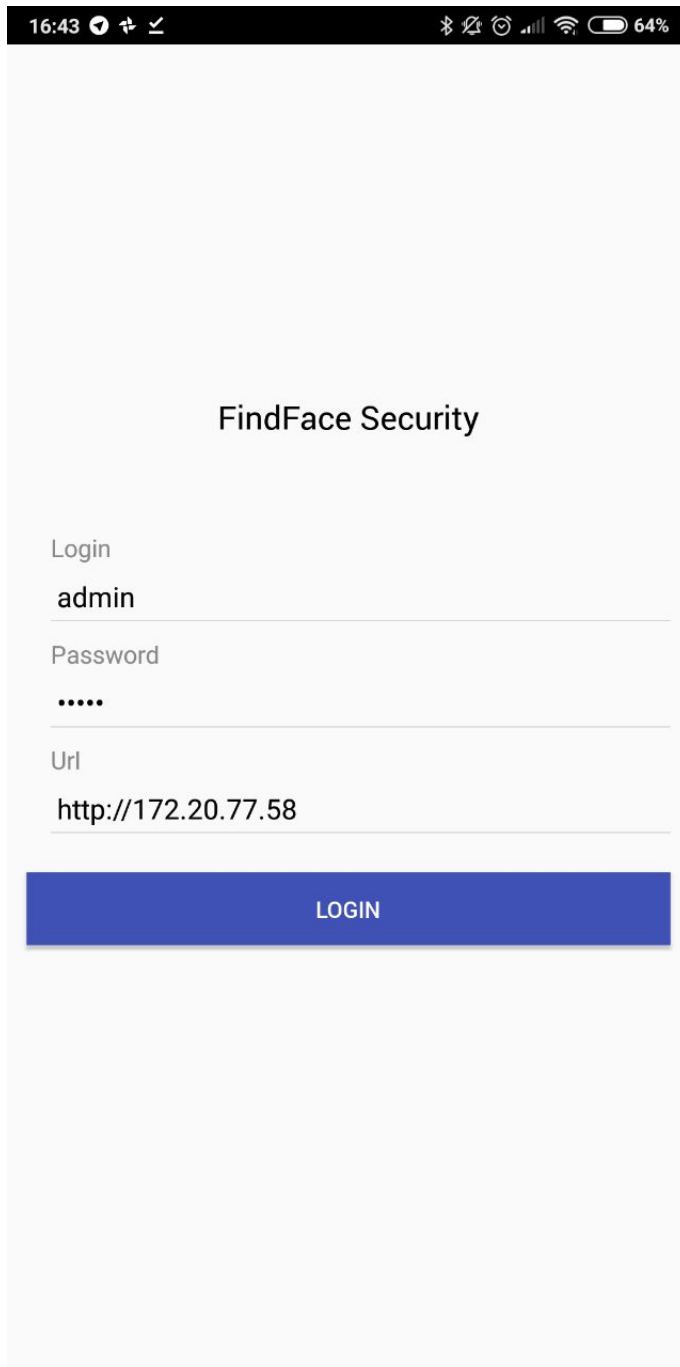

16:43 64%

FindFace Security

Login
admin

Password
.....

Url
http://172.20.77.58

LOGIN


The mobile app has a highly intuitive and handy design and provides the following functionality:

- Search for faces in the event list and dossier database.


The screenshot shows the 'Search' screen of the FindFace Security mobile app. At the top, there's a status bar with the time 16:35 and various icons. Below it, a blue header bar contains a menu icon and the word 'Search'. The main area has a 'Search in:' section with three buttons: 'EVENTS', 'DOSSIERS' (which is highlighted in blue), and 'SOCIAL NETWORKS'. Below this is a 'Source:' label with a close icon (X). A large image of a woman is displayed, with a green bounding box around her face. Under the image, there's an 'Event Id:' text field. Below that is a 'Threshold:' slider set to 52%. Then, a 'Limit:' section with four buttons: '10', '50', '100' (highlighted in blue), and '200'. At the bottom, there are two buttons: 'CLEAR' and 'SEARCH'.

- Real time face identification in live streams and video files

Important: To receive push notifications of events in the mobile version, open a relevant watch list settings in the full version, and check *Require Event Acknowledgment* and *Enable Sound Alert*.

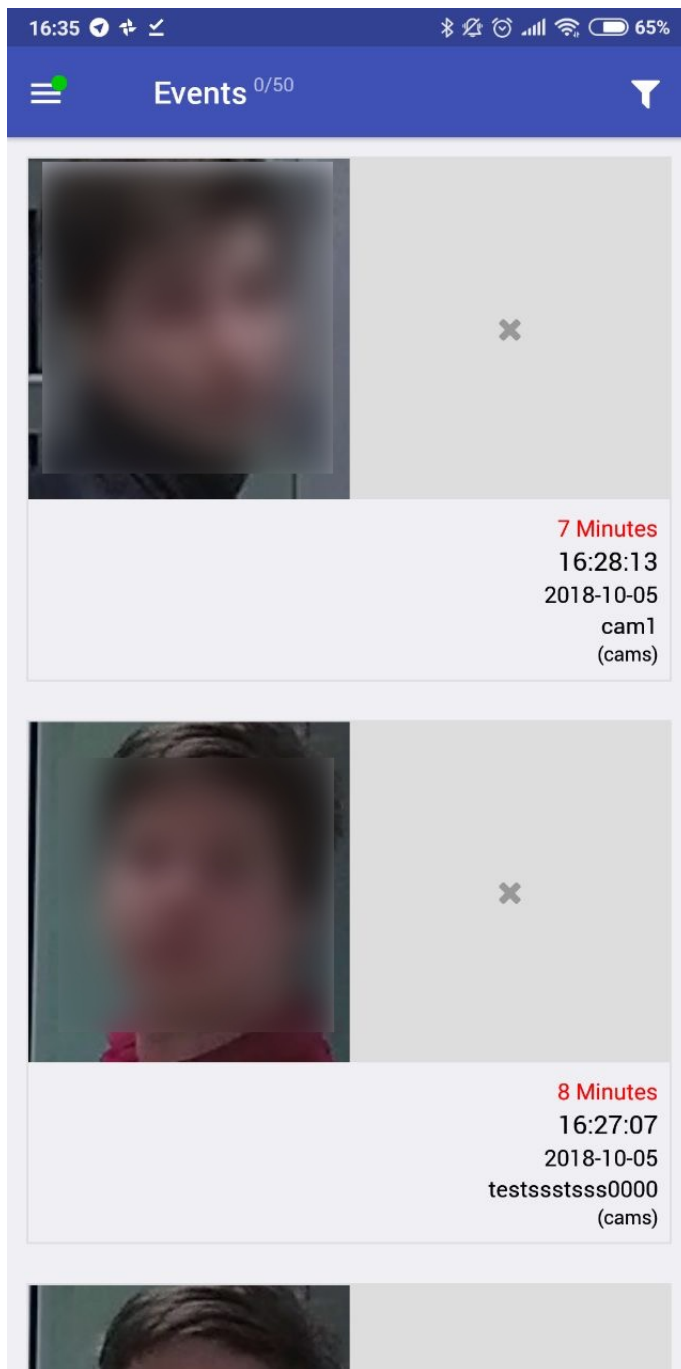

- View and create a dossier on a person.

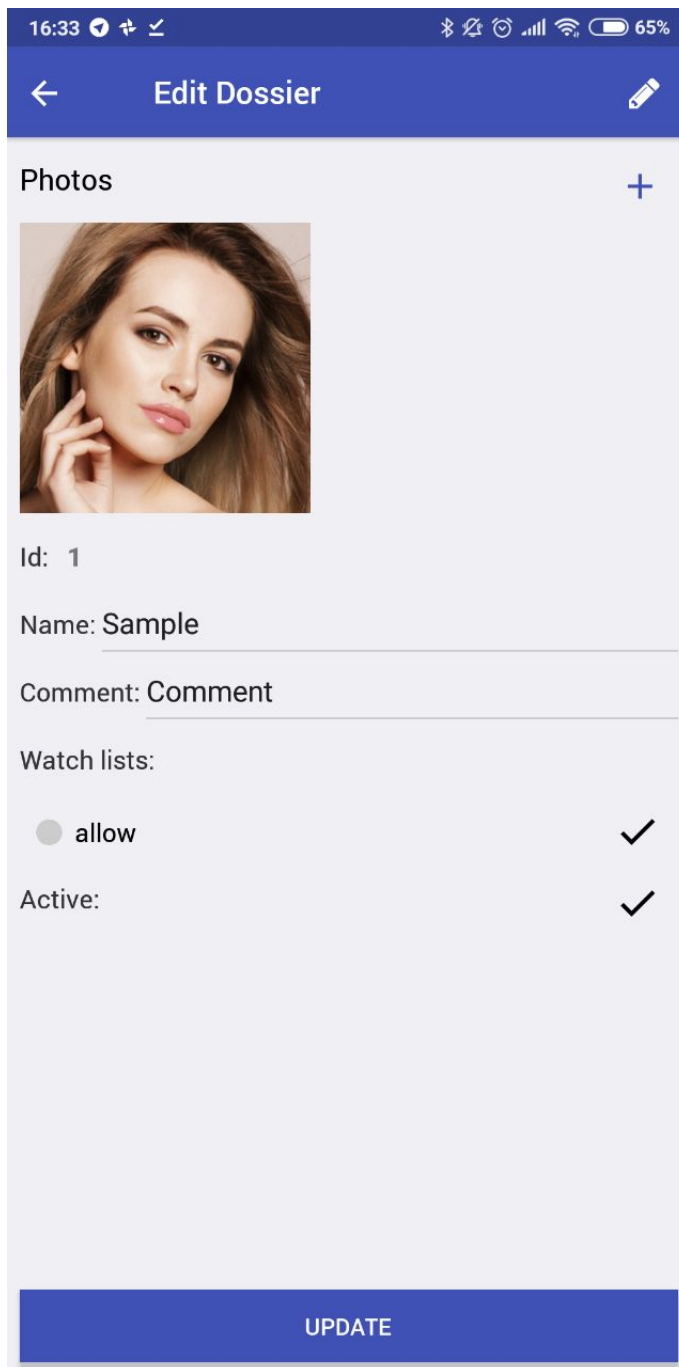

16:33 100% 65%

← Edit Dossier

Photos +

Id: 1

Name: Sample

Comment: Comment

Watch lists:

☒ allow ✓

Active: ✓

UPDATE

Working with the mobile app is similar to the full version.

Important: To access *Settings*, you need to enter a PIN code, 1234 by default.

CHAPTER 3


Integrations

This chapter is all about integration with FindFace Security. Integrate your system through HTTP API, webhooks, and plugins, or check out our turnkey partner integrations.

3.1 HTTP API

Detailed interactive documentation on the FindFace Security HTTP API is available after installation at `http://<ffsecurity_ip:port>/api-docs`. Learn and try it out.

Tip: You can also find it by navigating to *Preferences -> API Documentation* in the web interface.

 FindFace Security API doc

Internal API documentation

[Base URL: 172.17.46.22 /]
[/swagger.json](#)

Authentication

All API methods require a simple token-based HTTP Authentication. In order to authenticate, you should put word "Token" and a key into the Authorization HTTP header, separated by a whitespace:
"Authorization: Token be94403fb59c305b8d6db7ea1f90e019bef3ac85389cf2b10e04b8cf495b31a3"
All requests that fail to provide a valid authentication token will result in a HTTP 401 Unauthorized response.

Parameters Format

There are two ways to pass parameters to the API methods:

- application/json: parameters are represented by a JSON contained in the body.
- multipart/form-data: parameters are encoded into separate parts. This way supports uploading a photo image file in the same request.

Additional Information

Standard extraction limits:

- Image formats: JPEG, PNG, WEBP
- Maximum photo file size: 10 MB
- Maximum photo resolution: 6000 pixels on the biggest side
- Minimal size of a face: 50x50 pixels

Check `/etc/findface-extraction-api.ini` for custom definition
[Contact the developer](#)

Schemes

HTTP

Authorize

auth

System Preferences

>

3.2 Webhooks

You can set up FindFace Security to automatically send notifications about specific events, episodes, and counter records to a given URL. To do so, create and configure a webhook. In this case, when such an event, episode, or counter record occurs, FindFace Security will send an HTTP request to the URL configured for the webhook.

You can use webhooks for various purposes, for example, to notify a user about a specific event, invoke required behavior on a target website, solve security tasks such as automated access control, etc.

In this section:

- [Configure Webhook](#)
- [Webhook in Action](#)

3.2.1 Configure Webhook


Important: You need Administrator privileges to create a webhook.

Note: To use the webhooks, be sure that at least one of the following parameters is specified in `/etc/ffsecurity/config.py`: `SERVICE_EXTERNAL_ADDRESS` or `EXTERNAL_ADDRESS`.

To create and configure a webhook, do the following:

1. Navigate to the *Preferences* tab. Click *Webhooks*.

2. Click +.

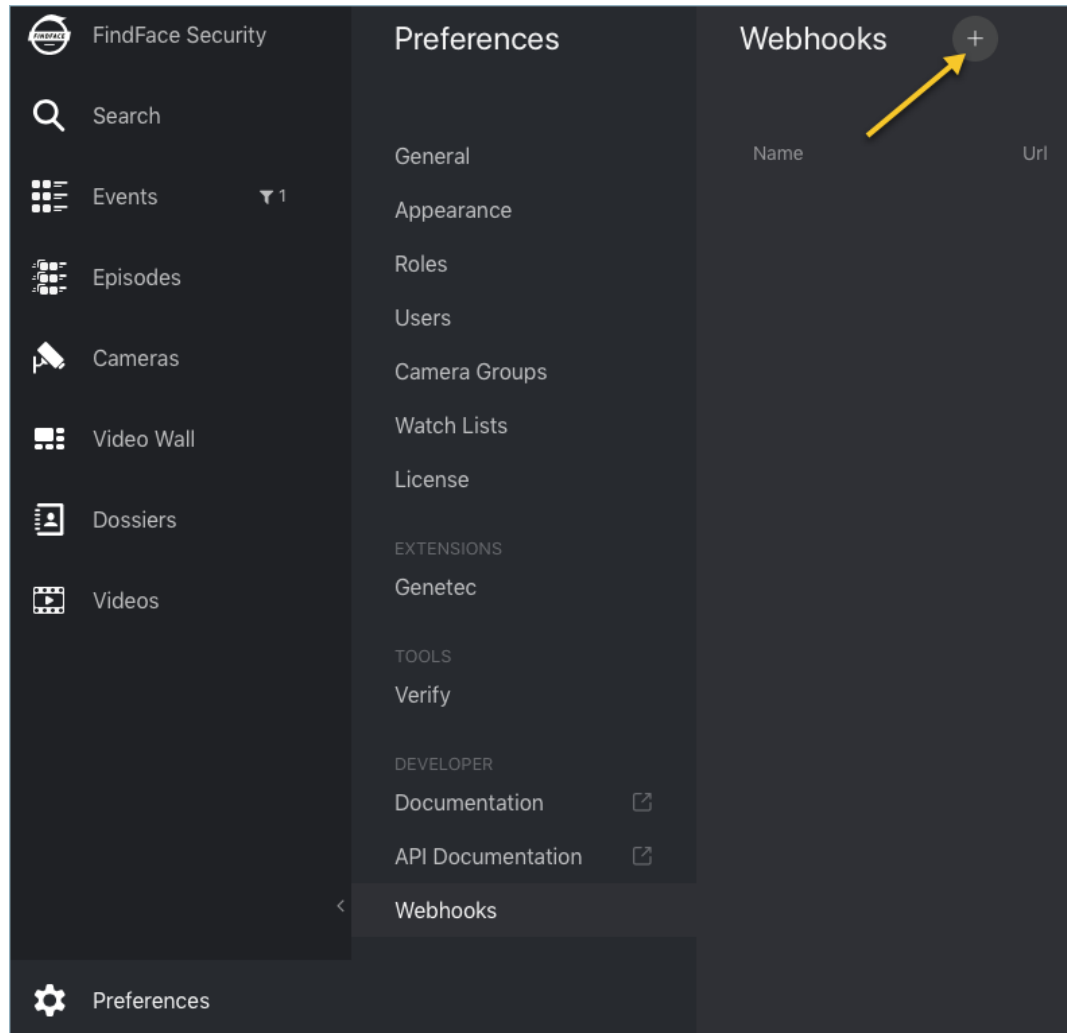

3. Specify the webhook title.

Create Webhook

* Webhook Title
Webhook 1

* Url
http://mywebhook.com/1

Filters

```
{
  "camera_group_in": [
    1,
    2
  ],
  "matched_dossier_in": [
    24
  ],
}
```

☒ Active

Save Back

4. Specify URL to automatically send notifications to.
5. You can send notifications in batches. Specify the maximum number of notifications in a webhook batch. The actual number may be less.
6. Specify the maximum number of attempts to send a notification. The interval between attempts increases exponentially with a maximum of 100 seconds.
7. FindFace Security will be automatically sending notifications on events, episodes, and counters which match given filters. The following filters are available:

Events:

- `allowed_bs_types`: *face tracking mode*, possible values: overall, realtime.
- `camera_group_in`: camera group id, number.

- camera_in: camera id, number.
- matched_lists_in: watch list id, number.
- matched_dossier_in: matched dossier id, number.
- matched: event matched status (true or false), boolean.
- confidence_gte: minimum confidence, number.

Episodes:

- allowed_types: episode status, possible values: an episode opening (episode_open), adding a new event into an episode (episode_event), an episode closing (episode_close).
- camera_group_in: camera group id, number.
- camera_in: camera id, number.
- matched_lists_in: watch list id, number.
- matched: event matched status (true or false), boolean.
- events_count_gte: minimum number of events in an episode, number.
- events_count_lte: maximum number of events in an episode, number.

Counters:

- counter_in: counter id, number
- camera_group_in: camera group id, number.
- camera_in: camera id, number
- faces_gte: minimum number of faces in a counter record, number.
- faces_lte: maximum number of faces in a counter record, number.
- silhouettes_gte: minimum number of silhouettes in a counter record, number.
- silhouettes_lte: maximum number of silhouettes in a counter record, number.

```
{
  "events": {
    "allowed_bs_types": [
      "overall",
      "realtime"
    ],
    "camera_group_in": [],
    "camera_in": [],
    "matched_lists_in": [],
    "matched_dossier_in": [],
    "matched": true,
    "confidence_gte": 0.75
  },
  "episodes": {
    "allowed_types": [
      "episode_open",
      "episode_event",
      "episode_close"
    ]
  }
}
```

(continues on next page)

(continued from previous page)

```

        ],
        "camera_group_in": [],
        "camera_in": [],
        "matched_lists_in": [],
        "matched": true,
        "events_count_gte": 0,
        "events_count_lte": 999
    },
    "counters": {
        "counter_in": [],
        "camera_group_in": [],
        "camera_in": [],
        "faces_gte": 0,
        "faces_lte": 0,
        "silhouettes_gte": 0,
        "silhouettes_lte": 0
    }
}

```

Important: Use only filters which match your search needs. To turn off a filter, remove it from a webhook. Do not leave a filter empty ([]) as in this case the result of filtration will be empty as well.

Note: To get all notifications, pass only curly braces without any enclosed filters:

```
{ }
```

Tip: Example #1. Get notifications about all events:

```
{ "events": { } }
```

Example #2. Get notifications of the opening of matched episodes:

```
{ "episodes": { "allowed_types": ["episode_open"], "matched": true } }
```

Note: You can specify several values for filters with square braces. In this case, the webhook will be triggered once one of the values from this filter has been matched. In the example below, you will get an event from the camera group 1 or 3 if a matched dossier is 12 or 25.

```

{
    "events": {
        "camera_group_in": [1, 3],
        "matched_dossier_in": [12, 25],
    },
}

```

8. Check *Active*.
9. Click *Save*.

3.2.2 Webhook in Action

Try out a webhook by capturing event notifications with a simple web server in Python:

```
from pprint import pprint
from aiohttp import web

async def handle(request):
    pprint(await request.json())
    return web.Response(status=200)

app = web.Application()
# for aiohttp v 3.x
# app.add_routes([web.post('/', handle)])

# for aiohttp v 2.x
app.router.add_post('/', handle)

web.run_app(app, port=8888)
```

Important: A webhook catcher that you use must return an HTTP 200 response after receiving the webhook request from FindFace Security, like in the example above.

If no filters are configured for a webhook, this web server will be getting notifications about all events, episodes, and counter records that occur in the system. The notifications have the following format:

Event

```
[{'acknowledged': True,
  'acknowledged_by': None,
  'acknowledged_date': '2020-05-18T15:08:38+00:00',
  'acknowledged_reaction': '',
  'bs_type': 'overall',
  'camera': None,
  'camera_group': 1,
  'confidence': 0.0,
  'created_date': '2020-05-18T15:08:38+00:00',
  'episode': None,
  'event_type': 'event_created',
  'face': 'http://172.17.46.134/uploads/2020/05/18/event/150842_face_AgohWm.jpg',
  'features': {'age': None,
               'beard': None,
               'emotions': None,
               'gender': None,
               'glasses': None,
               'liveness': None,
               'medmask': None},
  'frame': 'http://172.17.46.134/uploads/2020/05/18/event/150842_full_frame_Y3vtGe.jpg',
  'frame_coords_bottom': 320,
  'frame_coords_left': 117,
  'frame_coords_right': 170,
```

(continues on next page)

(continued from previous page)

```

'frame_coords_top': 242,
'id': '4267625862518432158',
'looks_like_confidence': None,
'matched': False,
'matched_dossier': None,
'matched_face': '',
'matched_lists': [-1],
'quality': -0.000766,
'scores': {'liveness_score': None,
            'quality': -0.000766480341553,
            'track': {'first_timestamp': '2020-05-18T15:08:38',
                      'id': '43277e17b1c2-44',
                      'last_timestamp': '2020-05-18T15:08:39'},
            'track_duration_seconds': 2.502499999999997},
'video_source': 1,
'webhook_type': 'events'}}

```

Episode opening

```

[{'acknowledged': True,
  'acknowledged_by': None,
  'acknowledged_date': None,
  'acknowledged_reaction': '',
  'best_event': '4267637154774219594',
  'camera_groups': [1],
  'cameras': [],
  'closed_date': None,
  'created_date': '2020-05-18T16:18:49.111880Z',
  'event_type': 'episode_open',
  'events_count': 1,
  'features': None,
  'id': 2118,
  'last_event': {'acknowledged': True,
                  'acknowledged_by': None,
                  'acknowledged_date': '2020-05-18T16:18:46+00:00',
                  'acknowledged_reaction': '',
                  'camera': None,
                  'camera_group': 1,
                  'confidence': 0.0,
                  'created_date': '2020-05-18T16:18:46+00:00',
                  'episode': 2118,
                  'face': 'http://172.17.46.134/uploads/2020/05/18/event/161849_face_
↪ j2TQwk.jpg',
                  'features': {'age': None,
                              'beard': None,
                              'emotions': None,
                              'gender': None,
                              'glasses': None,
                              'liveness': None,
                              'medmask': None},
                  'frame': 'http://172.17.46.134/uploads/2020/05/18/event/161849_full_
↪ frame_vTfuH9.jpg',
                  'frame_coords_bottom': 327,
                  'frame_coords_left': 778,
                  'frame_coords_right': 901,

```

(continues on next page)

(continued from previous page)

```

        'frame_coords_top': 161,
        'id': '4267637154774219594',
        'looks_like_confidence': None,
        'matched': False,
        'matched_dossier': None,
        'matched_face': '',
        'matched_lists': [-1],
        'quality': -0.000311,
        'scores': {'liveness_score': None,
                   'quality': -0.000311948591843,
                   'track': {'first_timestamp': '2020-05-18T16:18:46',
                             'id': '1ee9a3612af3-9',
                             'last_timestamp': '2020-05-18T16:18:47'},
                   'track_duration_seconds': 2.0399999999999999},
        'video_source': 2},
    'matched_event': None,
    'matched_lists': [-1],
    'open': True,
    'webhook_type': 'episodes'}}

```

Episode closing

```

[{'acknowledged': True,
  'acknowledged_by': None,
  'acknowledged_date': None,
  'acknowledged_reaction': '',
  'best_event': {'acknowledged': True,
                  'acknowledged_by': None,
                  'acknowledged_date': '2020-05-18T15:09:57+00:00',
                  'acknowledged_reaction': '',
                  'camera': None,
                  'camera_group': 1,
                  'confidence': 0.0,
                  'created_date': '2020-05-18T15:09:57+00:00',
                  'episode': 518,
                  'face': 'http://172.17.46.134/uploads/2020/05/18/event/151012_face_
↪5L1HQL.jpg',
                  'features': {'age': None,
                               'beard': None,
                               'emotions': None,
                               'gender': None,
                               'glasses': None,
                               'liveness': None,
                               'medmask': None},
                  'frame': 'http://172.17.46.134/uploads/2020/05/18/event/151012_full_
↪frame_CdNn2N.jpg',
                  'frame_coords_bottom': 299,
                  'frame_coords_left': 917,
                  'frame_coords_right': 1005,
                  'frame_coords_top': 179,
                  'id': '4267626103667833809',
                  'looks_like_confidence': None,
                  'matched': False,
                  'matched_dossier': None,
                  'matched_face': ''},

```

(continues on next page)

(continued from previous page)

```

        'matched_lists': [-1],
        'quality': -0.653877,
        'scores': {'liveness_score': None,
                    'quality': -0.653877139091491,
                    'track': {'first_timestamp': '2020-05-18T15:09:57',
                              'id': '43277e17b1c2-231',
                              'last_timestamp': '2020-05-18T15:09:57'},
                    'track_duration_seconds': 0.2502555555555554},
        'video_source': 1},
    'camera_groups': [1],
    'cameras': [],
    'closed_date': '2020-05-18T15:10:42.870851Z',
    'created_date': '2020-05-18T15:10:12.201230Z',
    'event_type': 'episode_close',
    'events_count': 1,
    'features': None,
    'id': 518,
    'last_event': {'acknowledged': True,
                   'acknowledged_by': None,
                   'acknowledged_date': '2020-05-18T15:09:57+00:00',
                   'acknowledged_reaction': '',
                   'camera': None,
                   'camera_group': 1,
                   'confidence': 0.0,
                   'created_date': '2020-05-18T15:09:57+00:00',
                   'episode': 518,
                   'face': 'http://172.17.46.134/uploads/2020/05/18/event/151012_face_
↪5LlHQL.jpg',
                   'features': {'age': None,
                                'beard': None,
                                'emotions': None,
                                'gender': None,
                                'glasses': None,
                                'liveness': None,
                                'medmask': None},
                   'frame': 'http://172.17.46.134/uploads/2020/05/18/event/151012_full_
↪frame_CdNn2N.jpg',
                   'frame_coords_bottom': 299,
                   'frame_coords_left': 917,
                   'frame_coords_right': 1005,
                   'frame_coords_top': 179,
                   'id': '4267626103667833809',
                   'looks_like_confidence': None,
                   'matched': False,
                   'matched_dossier': None,
                   'matched_face': '',
                   'matched_lists': [-1],
                   'quality': -0.653877,
                   'scores': {'liveness_score': None,
                              'quality': -0.653877139091491,
                              'track': {'first_timestamp': '2020-05-18T15:09:57',
                                        'id': '43277e17b1c2-231',
                                        'last_timestamp': '2020-05-18T15:09:57'},
                              'track_duration_seconds': 0.2502555555555554},
                              'video_source': 1},
                   'matched_event': None,
                   'matched_lists': [-1],

```

(continues on next page)

(continued from previous page)

```
'open': False,
'webhook_type': 'episodes']}]
```

Counter record

```
[{'camera': 3,
'camera_group': 1,
'counter': 2,
'counter_name': 'smosh',
'created_date': '2020-05-18T16:15:06.679592Z',
'event_type': 'counter_record',
'faces_bbox': [[[700, 210], [894, 210], [894, 464], [700, 464]],
                [[160, 190], [304, 190], [304, 394], [160, 394]]],
'faces_count': 2,
'fullframe': 'http://172.17.46.134/uploads/2020/05/18/counters/161506_fullframe_
↪7Z8n7X.jpg',
'id': 16,
'silhouettes_bbox': [[[15, 135], [584, 135], [584, 709], [15, 709]],
                    [[585, 80], [1194, 80], [1194, 684], [585, 684]],
                    [[0, 380], [69, 380], [69, 714], [0, 714]]],
'silhouettes_count': 3,
'thumbnail': 'http://172.17.46.134/uploads/2020/05/18/counters/161506_thumb_XLMFwE.
↪jpg',
'webhook_type': 'counters'}]]
```

To view a webhook pulling status, execute:

```
sudo journalctl -u findface-security.service | grep 'WebhooksManager'
```

Success:

```
May 18 21:21:38 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] Updating "events"
↪workers for webhooks: {2}
May 18 21:21:52 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:9KHqkQg7-
↪VW:aa3af58f] Webhook updater processing message(type-"events:event_created").
↪Consumer reception delta: 0.002617
May 18 21:21:52 qa-2 ffsecurity[17851]: INFO      [WebhooksManager:2] <queue: 0>
↪Webhook worker(id-2, type-"events") sent batch(len-1, type-"events"): [
↪'4267685965791894192']
May 18 21:21:53 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:v59UsC1V-
↪VW:75c4a9ec] Webhook updater processing message(type-"events:event_created").
↪Consumer reception delta: 0.002386
May 18 21:21:53 qa-2 ffsecurity[17851]: INFO      [WebhooksManager:2] <queue: 0>
↪Webhook worker(id-2, type-"events") sent batch(len-1, type-"events"): [
↪'4267685968207813297']
May 18 21:21:53 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:vKNlXiIn-
↪VW:c0219d31] Webhook updater processing message(type-"events:event_created").
↪Consumer reception delta: 0.004499
May 18 21:21:53 qa-2 ffsecurity[17851]: INFO      [WebhooksManager:2] <queue: 0>
↪Webhook worker(id-2, type-"events") sent batch(len-1, type-"events"): [
↪'4267685968837561053']
May 18 21:21:55 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:zZO8v4LJ-
↪VW:feff75dd] Webhook updater processing message(type-"events:event_created").
↪Consumer reception delta: 0.001905
```

(continues on next page)

(continued from previous page)

```

May 18 21:21:55 qa-2 ffsecurity[17851]: INFO      [WebhooksManager:2] <queue: 0>
↳Webhook worker(id-2, type-"events") sent batch(len-1, type-"events"): [
↳'4267685973269790230']
May 18 21:21:57 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:EbpDel24-
↳VW:083688e2] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.002017
May 18 21:21:57 qa-2 ffsecurity[17851]: INFO      [WebhooksManager:2] <queue: 0>
↳Webhook worker(id-2, type-"events") sent batch(len-1, type-"events"): [
↳'4267685977917324748']
May 18 21:21:57 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:L5XoQTdq-
↳VW:6fle397f] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.009237
May 18 21:21:57 qa-2 ffsecurity[17851]: INFO      [WebhooksManager:2] <queue: 0>
↳Webhook worker(id-2, type-"events") sent batch(len-1, type-"events"): [
↳'4267685979796372941']
May 18 21:21:58 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:ZZ33mwuv-
↳VW:a4cad3a2] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.008542
May 18 21:21:58 qa-2 ffsecurity[17851]: INFO      [WebhooksManager:2] <queue: 0>
↳Webhook worker(id-2, type-"events") sent batch(len-1, type-"events"): [
↳'4267685980899116054']
May 18 21:21:58 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:BfAQrgp0-
↳VW:4c19b207] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.003183
May 18 21:21:58 qa-2 ffsecurity[17851]: INFO      [WebhooksManager:2] <queue: 0>
↳Webhook worker(id-2, type-"events") sent batch(len-1, type-"events"): [
↳'4267685982215838395']

```

Failure:

```

May 18 21:29:09 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:jrGdiC7e-
↳VW:2def51cf] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.003909
May 18 21:29:09 qa-2 ffsecurity[17851]: WARNING  [WebhooksManager:2] <queue: 1>
↳Webhook worker(id-2, type-"events") Error sending webhook: 405, message='Not Allowed
↳'. Attempt 2 out of 10. Next attempt in 0.729 seconds.
May 18 21:29:10 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:jgqLszI7-
↳VW:6a7feal9] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.002402
May 18 21:29:10 qa-2 ffsecurity[17851]: WARNING  [WebhooksManager:2] <queue: 2>
↳Webhook worker(id-2, type-"events") Error sending webhook: 405, message='Not Allowed
↳'. Attempt 3 out of 10. Next attempt in 1.968 seconds.
May 18 21:29:10 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:LLGB1RRR-
↳VW:053d7c7d] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.003794
May 18 21:29:11 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:4Vl23NQD-
↳VW:a4640479] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.037162
May 18 21:29:11 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:QKY577ed-
↳VW:41cd531a] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.005274
May 18 21:29:12 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:SVSrlj1n-
↳VW:973ae0dd] Webhook updater processing message(type-"events:event_created").
↳Consumer reception delta: 0.004273
May 18 21:29:12 qa-2 ffsecurity[17851]: WARNING  [WebhooksManager:2] <queue: 6>
↳Webhook worker(id-2, type-"events") Error sending webhook: 405, message='Not Allowed
↳'. Attempt 4 out of 10. Next attempt in 5.314 seconds.

```

(continues on next page)

(continued from previous page)

```
May 18 21:29:12 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:pho03HFd-  
↳VW:9c6812d1] Webhook updater processing message(type="events:event_created").  
↳Consumer reception delta: 0.019604  
May 18 21:29:13 qa-2 ffsecurity[17851]: INFO      [WebhooksManager] [SC:WDMmZ5MO-  
↳VW:842b3397] Webhook updater processing message(type="events:event_created").  
↳Consumer reception delta: 0.231164
```

3.3 Partner Integrations

3.3.1 Genetec Security Center

FindFace Security integration with Genetec Security Center allows you to expand the capabilities of your Genetec-based security system with face recognition functionality.

Configure Integration

Integration with Genetec Security Center is implemented via the `findface-genetec` plugin. By default, the plugin is disabled.

Before getting started with the integration on the FindFace Security side, deploy the Genetec Web SDK and Media Gateway packages, and create an `Alarm` entity that will be triggered in Genetec Security Center when a face recognition event occurs in FindFace Security.

Important: For the Genetec-FindFace integration to work, you also need to purchase a proper license from Genetec (license part number `GSC-1SDK-Ntech-FindFace`) and activate it in Genetec Security Center.


Purchase order				
Part #	Description		Quantity	
GSC-5.8	Version 5.8		1	
GSC-0m-E	GSC Omnicast Enterprise Package which includes: Archiving and Auxiliary Archiving support, Media Router, Audio, Remote Security Desk, Camera Sequences, Camera Blocking, Camera Dewarping, Hardware Matrix Support, Time Zone, Edge recording and trickling, Keyboard and Joystick Support, Max. 300 cameras per Archiver / 100 cameras on the Directory machine		1	
GSC-Base-5.8	Genetec Security Center (GSC) Base Package - Version 5.8 which includes: 1 Directory, 5 Security Desk client connections (incl. Web Client), Plan Manager Basic, Alarm Management, Advanced Reporting, System Partitioning, Zone Monitoring, IO Modules Support, Email Support, Macros Support (actual macro		1	
GSC-0m-E-1C	1 camera connection		20	
GSC-1MobileU	One (1) Genetec Security Mobile app connection Supported only with GSC Mobile		1	
GSC-1SDK-Ntech-FindFace	One (1) Genetec SDK connection for Ntech with FindFace		20	
			OK	

In this chapter:


- *Configure Genetec Web SDK and Media Gateway*
- *Create Alarm in Genetec Security Center*
- *Enable Genetec Integration in FindFace Security*
- *Configure Endpoints in FindFace Security*
- *Import Cameras from Genetec Security Center*
- *Create Watch Lists and Dossiers in FindFace Security*

Configure Genetec Web SDK and Media Gateway

To enable and configure Web SDK, use Genetec Config Tool. For details, refer to *Security Center Administrator Guide* -> Chapter 52: Role Types -> Web-based SDK configuration tabs.

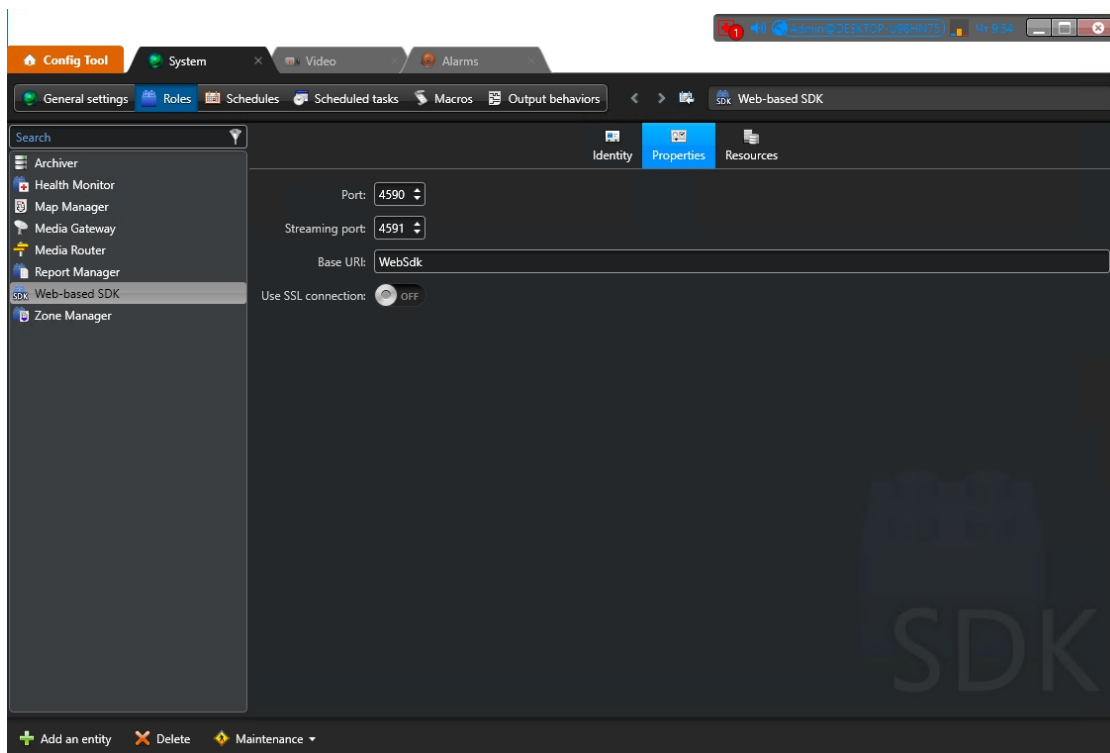


When enabling and configuring Media Gateway in Genetec Config Tool, refer to *Security Center Administrator Guide* -> Chapter 24: Video Deployment.

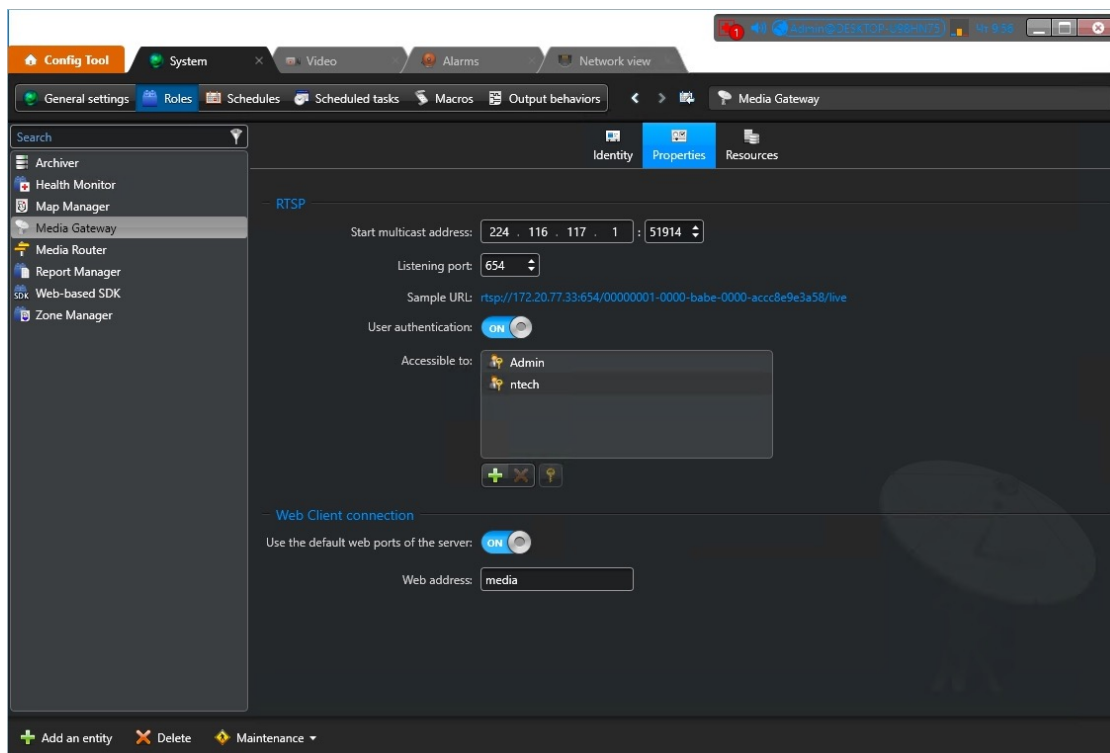

Important: Make sure that the firewall is configured so that the ports for the WebSDK and Media Gateway are open.

Create Alarm in Genetec Security Center


Create and configure a new Alarm entity in Genetec Config Tool. Refer to *Security Center Administrator Guide -> Chapter 48: Alarms -> Creating Alarms* for details.

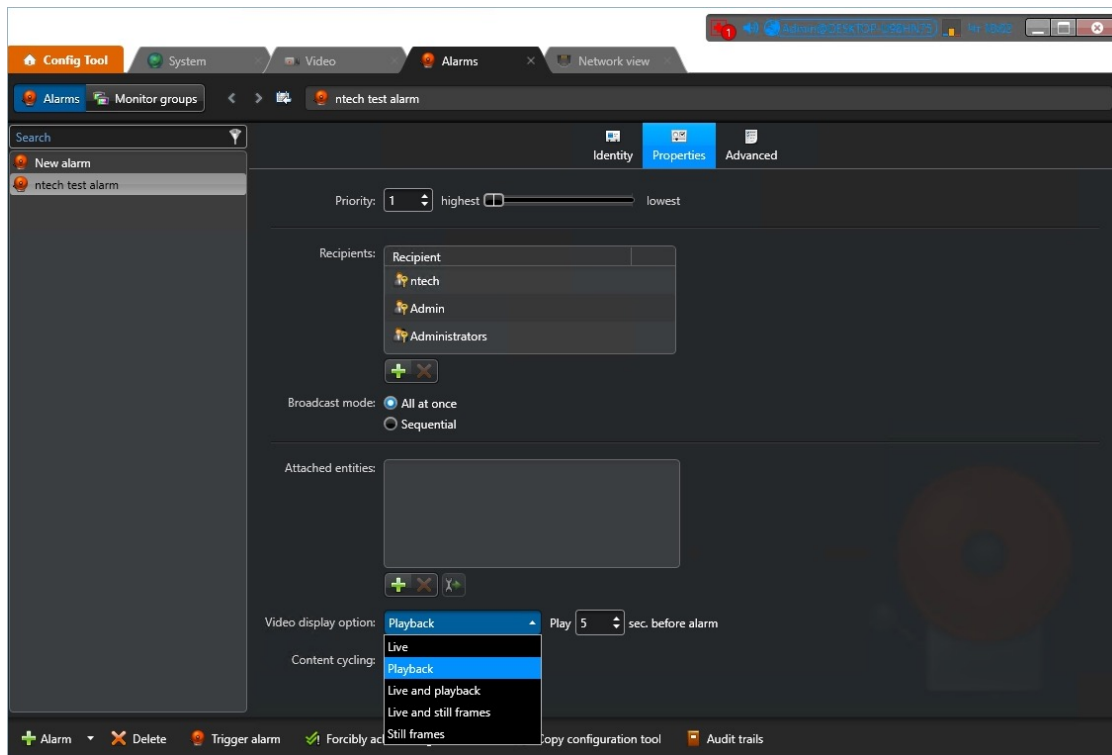

Tip: On the *Properties* tab, select the *Video display option* that suits your needs the best. Available options are *Live*, *Playback*, etc.

Tip: To enable alarm procedures and auto rotation of video right within the alarm pop-up window, enable *Content cycling*.

When configuring the integration in FindFace Security, you will have to enter the alarm logical id that is specified on the *Identity* tab.

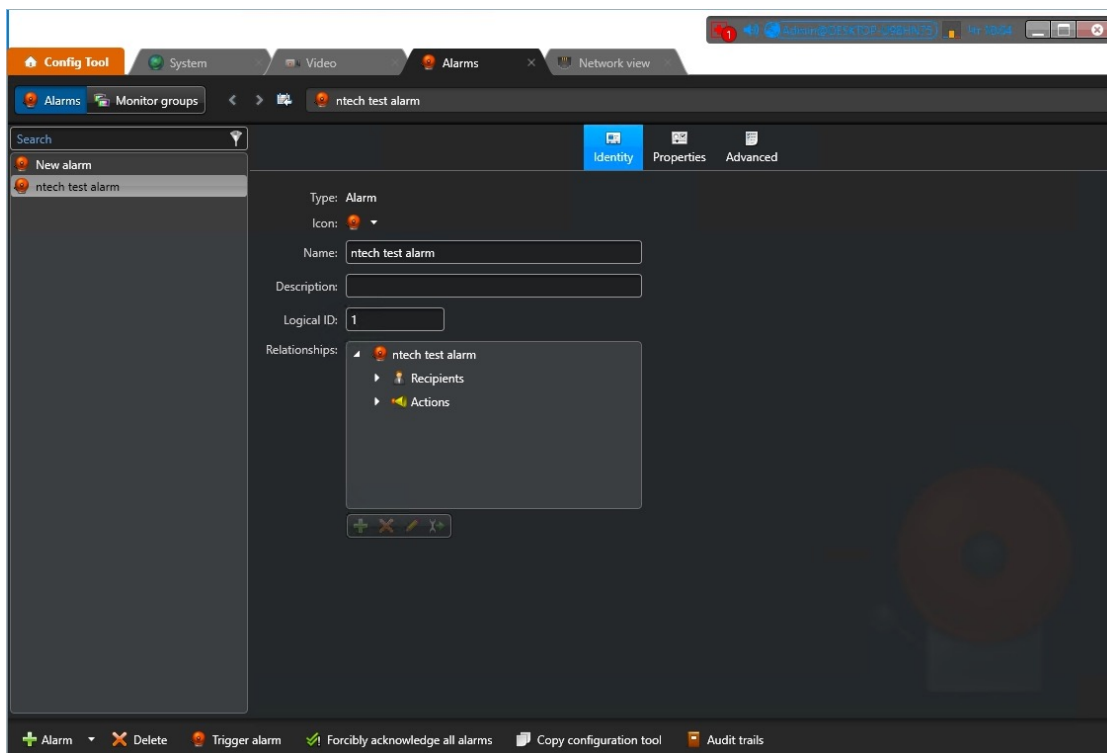

Enable Genetec Integration in FindFace Security

To enable the `findface-genetec` plugin, open the `findface-security` configuration file, and uncomment the `INSTALLED_APPS.append('ffsecurity_genetec')` line.

Also, make sure that at least one of the following parameters is specified: `SERVICE_EXTERNAL_ADDRESS` or `EXTERNAL_ADDRESS`.

```
sudo vi /etc/ffsecurity/config.py

...
# SERVICE_EXTERNAL_ADDRESS is prioritized for FFSecurity webhooks and
# Genetec plugin.
# EXTERNAL_ADDRESS is used instead if SERVICE_EXTERNAL_ADDRESS is not
# provided.
# You must provide either SERVICE_EXTERNAL_ADDRESS or EXTERNAL_ADDRESS in
# order
# to be able to work with FFSecurity webhooks and Genetec plugin.
SERVICE_EXTERNAL_ADDRESS = 'http://127.0.0.1'
# EXTERNAL_ADDRESS is used to access objects created inside FFSecurity via
# external links.
EXTERNAL_ADDRESS = ''

...
# FINDFACE SECURITY PLUGINS
#
# =====
# Uncomment lines below to enable plugins. Please consult documentation for
# a plugin specific settings.
...
```

(continues on next page)

(continued from previous page)

```
# ===== Genetec =====  
INSTALLED_APPS.append('ffsecurity_genetec')
```

Restart findface-security.

```
sudo systemctl restart findface-security.service
```

Configure Endpoints in FindFace Security

To establish connection between FindFace Security and Genetec Security Center, do the following:


1. Navigate to the *Preferences* tab. Click *Genetec*.

The screenshot shows the 'Genetec Settings' application window. At the top right, there is a status bar with the text '2.6.999.1910+222.g29b1743 2019-04-04 01:00:16'. Below the title bar, the main header area contains 'Genetec Settings' on the left and 'English' with a dropdown arrow on the right. Below this, the 'State: Configured' is displayed. The interface has two tabs: 'Config' (selected) and 'Cameras'. The 'Config' tab is divided into two sections: 'Server' and 'Media'. The 'Server' section contains fields for 'Host' (172.20.77.33), 'Port' (4590), 'User' (admin), 'Password' (masked with dots), and 'Base Uri' (WebSDK). The 'Media' section contains fields for 'Media Host' (172.20.77.33), 'Media Port' (654), 'User' (ntech), and 'Password' (masked with dots).

2. In the *Server* and *Media* sections, specify *settings* of the Web SDK and Media Gateway endpoints.

Important: The ports for the WebSDK and Media Gateway need to be open.


3. In the *Ids* section, specify the *logical id* of the Alarm entity that will be triggered in Genetec Security Center when a face recognition event occurs in FindFace Security.

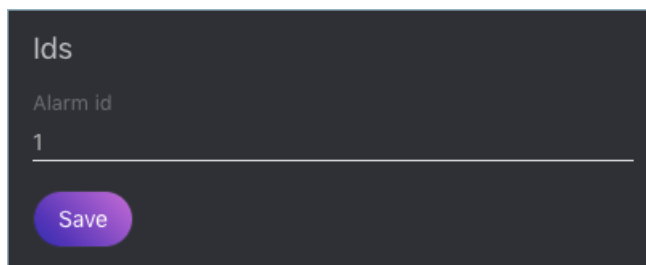


4. Click *Save*. If the connection to Genetec Security Center is successfully established, you will see the *State* change to *Configured*.

Import Cameras from Genetec Security Center

Once the connection to Genetec Security Center is established, import cameras. To do so, click *Cameras* on the *Genetec* tab. Click *Import*.

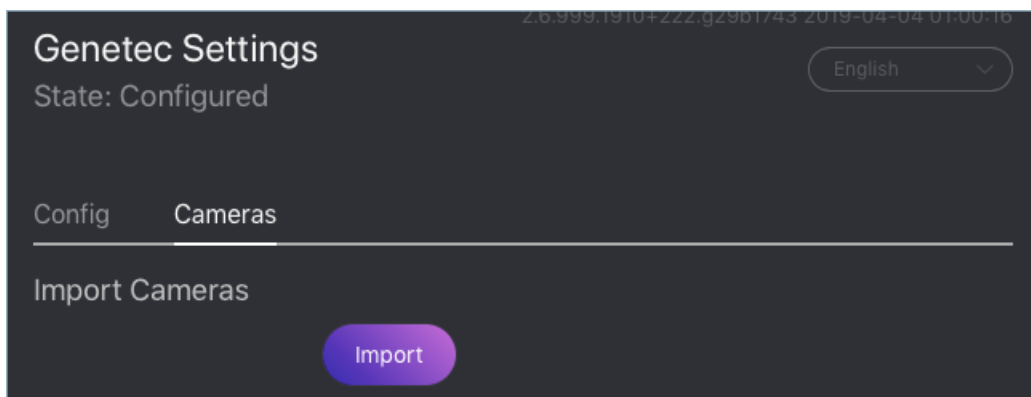

This action will create a *group of cameras* Genetec listing all the cameras from Genetec Security Center.

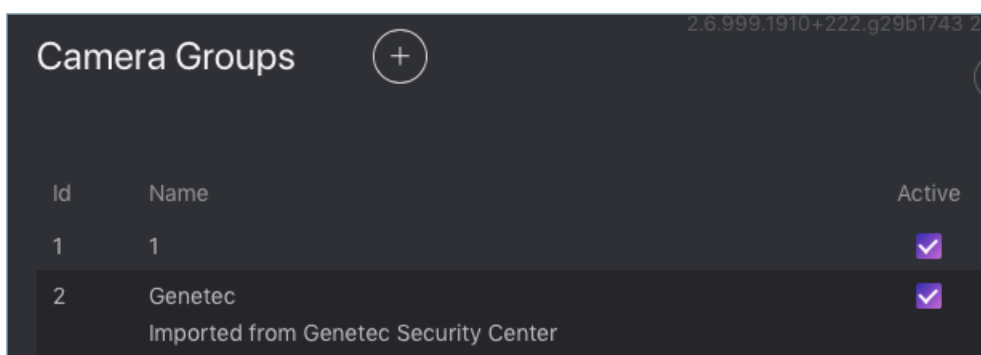

Id	Name	Active
1	1	<input checked="" type="checkbox"/>
2	Genetec Imported from Genetec Security Center	<input checked="" type="checkbox"/>

To view this list of cameras, navigate to the *Cameras* tab on the FindFace Security navigation bar. If you want to exclude a camera from face recognition, simply deactivate it in the list.


Create Watch Lists and Dossiers in FindFace Security

After you have configured the endpoints and camera settings, finish the integration by creating a *dossier database*. Notifications about face recognition events will be automatically sent to Genetec Security Center. See *Notifications in Genetec Security Center*.

Notifications in Genetec Security Center

Each face recognition event from a Genetec camera, that has a match with a dossier, triggers a relevant alarm in Genetec Security Center. Every alarm triggered by FindFace Security is associated with a relevant camera (source of the face recognition event) so you can instantly watch live or playback video within the Alarm Monitoring task in Genetec Security Desk. FindFace Security also utilizes Alarm Procedures to provide a user with additional content related to the alarm, such as:

- face detected in video
- matching face from the dossier database
- person's name and comment from the dossier
- matching confidence
- watch list's name
- full frame

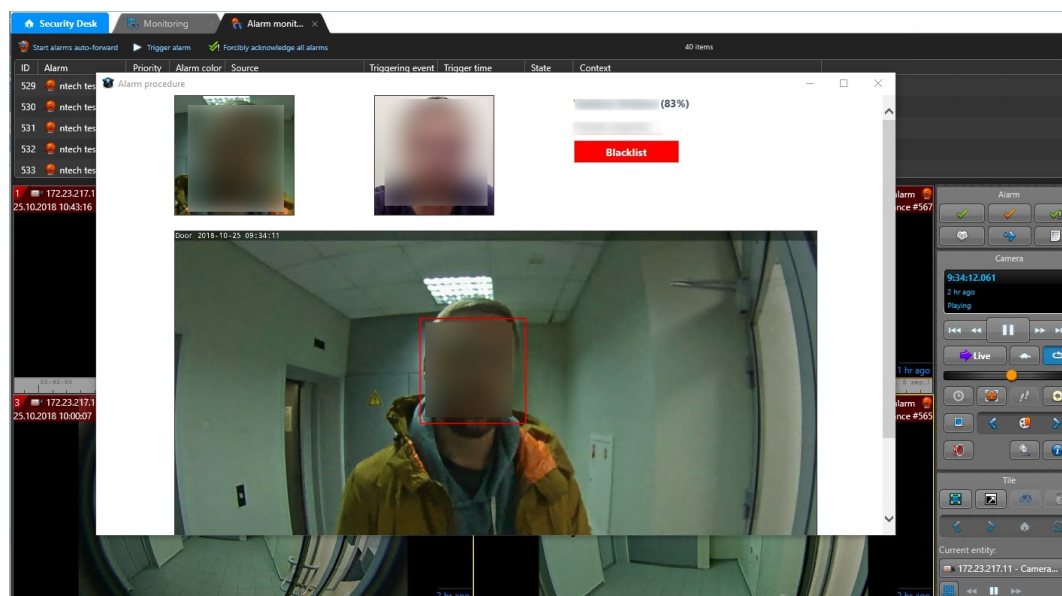

After you receive a face recognition alarm, process it as you usually do with other alarms in Genetec Security Center.

3.3.2 Axxon Next

FindFace Security integration with Axxon Next allows you to detect and identify faces in video streams from an Axxon-based security system.

Important: One FindFace Security instance supports interaction with only one Axxon Next server.

Integration with Axxon Next is implemented via the `ffsecurity_axxon` plugin.

To configure the FindFace Security integration with Axxon Next in Ubuntu, do the following:

1. Activate the plugin by uncommenting the `INSTALLED_APPS.append('ffsecurity_axxon')` line in the `/etc/ffsecurity/config.py` configuration file.

```

sudo vi /etc/ffsecurity/config.py

...

# =====
# FINDFACE SECURITY PLUGINS
# =====
# Uncomment lines below to enable plugins. Please consult documentation for
# a plugin specific settings.
# ===== Axxon =====
INSTALLED_APPS.append('ffsecurity_axxon')

```

2. Uncomment the FFSECURITY->AXXON section in the configuration file. Fill it out as shown in the example below. In the `api` parameter, specify the IP address of the Axxon Next server that will provide FindFace Security with Axxon API and HLS-archive streams. In the `rtsp` parameter, specify the common segment of Axxon video stream addresses. `name`, `user`, `password`: the Axxon Next server name and credentials to access it.

```

FFSECURITY['AXXON'] = [
    {
        'name': 'server_name',
        'api': 'http://example.com/',
        'rtsp': 'rtsp://example.com:554/',
        'user': 'user',
        'password': 'password',
    }
]

```

3. (Optional). If facial recognition events are required to contain video from Axxon Next, uncomment the `FFSECURITY_UI_CONFIG['dossier']` section.

```

FFSECURITY_UI_CONFIG['dossier'] = {
    'video': True,
}

```

4. Create representations of Axxon Next cameras in FindFace Security (see [Camera Management](#)). A camera representation URL must be specified in the format `axxon:<friendlyNameLong>`, where `friendlyNameLong` is a camera name on the Axxon Next server. Find out this name in the Axxon user interface, or via Axxon API by executing:

```

curl http://user:password@127.0.0.1/video-origins/

{
  "OLOLOE-DEV/DeviceIpint.vhod_1/SourceEndpoint.video:0:0" : {
    "friendlyNameLong" : "vhod_1.Vhod_1",
    "friendlyNameShort" : "Vhod_1",
    "origin" : "OLOLOE-DEV/DeviceIpint.vhod_1/SourceEndpoint.video:0:0",
    "state" : "signal_restored"
  }
}

```

For the camera from the example above, URL must be specified as `axxon:vhod_1.Vhod_1`.

The configuration is now finished. If the integration is properly configured, FindFace Security will be detecting and identifying faces in Axxon Next video streams, and facial recognition events will be featuring video clips from Axxon Next (upon relevant settings).

3.4 Plugins

In the course of configuring the system, you can set your own directives that determine how the system processes a face after it has been detected in the video. To do so, write a Python plugin(s).

Plugins are enabled through the `findface-facerouter` configuration file. They allow you to configure video face detection outcome individually for each use case.

Tip: As an example, check out the default plugin `/opt/ffsecurity/fr_plugin/ffsec_fr_plugin.py`.

3.4.1 Deploy `findface-facerouter` in FindFace Security

To deploy the `findface-facerouter` component, do the following:

1. Install `findface-facerouter` either from the *console installer* or from the apt repository as such:

```
sudo apt update
sudo apt install -y findface-facerouter
```

2. Open the `/etc/findface-facerouter.py` configuration file.

```
sudo vi /etc/findface-facerouter.py
```

3. If the `findface-facerouter` and `findface-sf-api` components are installed on different hosts, uncomment the `sfapi_url` parameter and specify the `findface-sf-api` host IP address.

```
sfapi_url = 'http://localhost:18411'
```

4. Open the `/etc/ffsecurity/config.py` configuration file. In the `ROUTER_URL` parameter, actualize the `findface-facerouter` IP address and port (18820 by default). Specify either external or internal IP address, subject to the network through which `findface-video-worker` interacts with `findface-facerouter`.

```
sudo vi /etc/ffsecurity/config.py

...
FFSECURITY = {
    'ROUTER_URL': 'http://127.0.0.1:18820/v0/frame?',
```

5. Enable the `findface-facerouter` service autostart and launch the service.

```
sudo systemctl enable findface-facerouter.service && sudo systemctl start_
↪ findface-facerouter.service
```

6. Restart the `findface-security` service.

```
sudo systemctl restart findface-security.service
```

3.4.2 Configure `findface-facerouter` to Use Plugins

Tip: To get started, try the default plugin `/opt/ffsecurity/fr_plugin/ffsec_fr_plugin.py`. Or go ahead and *create your own*.

Important: Be sure to *change* the Tarantool database structure prior, according to the processing directive in the plugin.

Important: The `findface-facerouter` component must be *installed and configured*.

To configure `findface-facerouter` to use plugins, do the following:

1. Put a plugin into a directory of your choice. All plugins in use have to be in the same directory.
2. Open the `findface-facerouter` configuration file. Uncomment the `plugin_dir` parameter and specify the plugin directory.

Warning: The `findface-facerouter.py` content must be correct Python code.

```
sudo vi /etc/findface-facerouter.py

plugin_dir                = '/etc/findface/plugins/'
```

3. Restart `findface-facerouter`.

```
sudo systemctl restart findface-facerouter.service
```

3.4.3 Basics

In this section:

- *Plugin Architecture*
 - *The preprocess method*
 - *The process method*
 - *The shutdown method*

Plugin Architecture

After the `findface-video-worker` component detects a face, the face is posted to the `findface-facerouter` component via an HTTP API request. To process this request, each `findface-facerouter` plugin must export the `activate(app, ctx, plugin_name, plugin_source)` function.

The `activate` function has the following parameters:

- `app`: a `tornado.web.Application` entity of the `findface-facerouter` component.

- `ctx`: data context to be passed to a plugin upon activation.
- `plugin_name`: the name of the plugin to be activated.
- `plugin_source`: source object to load the plugin from.

Upon activation, a plugin is passed the following data context:

1. `request.ctx.sfapi`: a set up `ntech.sfapi_client.Client` instance that can be invoked directly to process the result of video face detection (for example, to create a new gallery, add a face to a gallery, etc.).
2. `plugins`: `OrderedDict` with all the plugins as (key: plugin name, value: the result returned by the `activate` function).
3. `idgen`: id generator that can be invoked as `ctx.idgen()`.

The `activate(app, ctx, plugin_name, plugin_source)` function must return an object with the following methods:

1. `preprocess`,
2. `process`,
3. `shutdown` (optional).

The preprocess method

In this method, a `findface-facerouter` plugin decides if it is interested in the face received from the `findface-video-worker` component. If so, it returns a tuple or a list that contains one or several strings 'facen', 'gender', 'age', 'emotions'. This means that it is necessary to extract a biometric sample, recognize gender, age, emotions respectively. If the returned tuple/list is non-empty, the `findface-facerouter` redirects the face to the `findface-sf-api` in a `/detect` POST request with relevant query string parameters (`facen=on`, `gender=on`, `age=on`, `emotions=on`).

The basic `preprocess` method to inherit from has the following syntax (see the `Plugin` class):

```
preprocess (self, request: FrHTTPRequest, labels: typing.Mapping[str, str]) → typing.Tuple[str]
```

Parameters

- **FrHTTPRequest** (`tornado.httpserver.HTTPRequest`) – a HTTP API request that includes an extra argument `params`
- **labels** (`dictionary`) – a custom set of a frame labels, which are initially specified in a job parameters for `findface-video-worker` and then assigned to the frame

The `params` argument of `FrHTTPRequest` includes the following fields:

Parameters

- **photo** (`bytes`) – JPEG video frame featuring a detected face
- **face0** (`bytes`) – normalized face image
- **bbox** (list of integers `[[x1,y1,x2,y2]]`, where `x1`: x coordinate of the top-left corner, `y1`: y coordinate of the top-left corner, `x2`: x coordinate of the bottom-right corner, `y2`: y coordinate of the bottom-right corner) – coordinates of the face region in the video frame
- **cam_id** (`string`) – camera id
- **timestamp** (`datetime.datetime`) – video frame timestamp

- **detectorParams** (*dictionary*) – debug information from the video face detector
- **bs_type** (*string*) – best face search mode. Available options: overall (the `findface-video-worker` posts only one snapshot per track, but of the highest quality.), realtime (the `findface-video-worker` posts the best snapshot within each of consecutive time intervals).
- **labels** (*dictionary*) – (duplicates `params.labels`) a custom set of a frame labels, which are specified in a job parameters for `findface-video-worker` and then assigned to the frame

The decision about face processing is made based on the data in the `request.params`, including the custom set of labels, as well as for any other reasons.

The process method

This method is called if the `preprocess` method returns a non-empty tuple or list (i.e. with ‘facen’, ‘gender’, ‘age’, an/or ‘emotions’ strings). After the `findface-sf-api` returns a response with the result of face detection (see the `/detect` POST request) with all the requested face features, the `findface-facerouter` component calls the `process` method of the plugin in order to perform face processing itself.

To process a face, a plugin uses `request.ctx.sfapi`.

The basic `process` method to inherit from has the following syntax (see the `Plugin` class):

```
process (self, request: FrHTTPRequest, photo: bytes, bbox: typing.List[int], event_id: int, detection: DetectFace)
```

The shutdown method

This method is only called before the `findface-facerouter` shutdown.

The basic `shutdown` method to inherit from has the following syntax (see the `Plugin` class):

```
shutdown (self)
```

3.4.4 Classes and Methods

In this section:

- *Basic Classes*
- *Object Classes*
- *Face Detection and Gallery Management*
- *Filters for Database Search*
- *Display Error Messages*

Basic Classes

class `facrouter.plugin.Plugin`

Provides the basic methods for writing a plugin (see [Basics](#)). A custom class that wraps a plugin must inherit from the `Plugin` class.

preprocess (*self*, *request*: `FrHTTPRequest`, *labels*: `typing.Mapping[str, str]`) → `typing.Tuple[str]`

Returns a tuple that contains one or several strings 'facen', 'gender', 'age', 'emotions'. This means that `findface-facrouter` must request `findface-extraction-api` to extract a biometric sample, recognize gender, age, emotions respectively.

Parameters

- **FrHTTPRequest** (`tornado.httpserver.HTTPRequest`) – a HTTP API request that includes an extra argument `params`
- **labels** (`dictionary`) – a custom set of a frame labels from `request.params`

Returns one or several strings 'facen', 'gender', 'age', 'emotions'

Return type `tuple`

The `params` argument of `FrHTTPRequest` includes the following fields:

Parameters

- **photo** (`bytes`) – JPEG video frame featuring a detected face
- **face0** (`bytes`) – normalized face image
- **bbox** (list of integers `[[x1,y1,x2,y2]]`, where `x1`: x coordinate of the top-left corner, `y1`: y coordinate of the top-left corner, `x2`: x coordinate of the bottom-right corner, `y2`: y coordinate of the bottom-right corner) – coordinates of the face region in the video frame
- **cam_id** (`string`) – camera id
- **timestamp** (`datetime.datetime`) – video frame timestamp
- **detectorParams** (`dictionary`) – debug information from the video face detector
- **bs_type** (`string`) – best face search mode. Available options: overall (the `findface-video-worker` posts only one snapshot per track, but of the highest quality.), realtime (the `findface-video-worker` posts the best snapshot within each of consecutive time intervals).
- **labels** (`dictionary`) – (duplicates `params.labels`) a custom set of a frame labels, which are specified in a job parameters for `findface-video-worker` and then assigned to the frame

process (*self*, *request*: `FrHTTPRequest`, *photo*: `bytes`, *bbox*: `typing.List[int]`, *event_id*: `int`, *detection*: `DetectFace`)

Accepts the detected face features.

Parameters

- **request** (`tornado.httpserver.HTTPRequest`) – a HTTP API request from `findface-video-worker`
- **photo** (`bytes`) – JPEG video frame featuring a detected face, from `request.params`
- **bbox** (list of integers `[[x1,y1,x2,y2]]`, where `x1`: x coordinate of the top-left corner, `y1`: y coordinate of the top-left corner, `x2`: x coordinate of the bottom-right corner, `y2`: y coordinate of the bottom-right corner) – coordinates of the face region in the video frame, from `request.params`

- **event_id** (*uint64*) – id of the face automatically set by `findface -facerouter` upon receiving it from `findface-video-worker`. Can be used as a face custom identifier in the biometric database.
- **detection** (`objects.DetectFace`) – detection result received from `findface-sf-api`, that contains requested face features such as faces, gender, age and emotions.

Returns n/a

Return type n/a

shutdown (*self*)

This method is invoked before the `findface-facerouter` shutdown.

Parameters n/a

Returns n/a

Object Classes

class `objects.BBox`

Represents coordinates of the rectangle around a face.

class `objects.DetectFace`

Represents a detection result with the following fields:

Parameters

- **id** (*string*) – id of the detection result in memcached
- **bbox** (`objects.Bbox`) – coordinates of the rectangle around a face
- **features** (*dictionary*) – (optional) information about gender, age and emotions

class `objects.DetectResponse`

Represents a list of `objects.DetectionFace` objects with an additional field `orientation` featuring information about the face EXIF orientation in the image.

Parameters **orientation** (*EXIF orientation*) – orientation of a detected face

class `objects.FaceId` (*namedtuple('FaceId', ('gallery', 'face'))*)

Represents a custom face identifier object in the gallery.

Parameters

- **gallery** (*string*) – gallery name
- **face** (*integer*) – custom face identifier in the gallery

class `objects.Face`

Represents a result of database search by biometric sample

Parameters

- **id** (`objects.FaceId`) – FaceId object.
- **features** (*dictionary*) – information about gender, age and emotions
- **meta** (*dictionary*) – face meta data
- **confidence** (*float*) – similarity between the biometric sample and a face in the search result

class `objects.ListResponse`

Represents a list of `objects.Face` objects (i.e. a list of biometric sample search results) with an additional field `next_page` featuring the cursor for the next page with search results.

Parameters `next_page` (*string*) – cursor for the next page with search results

Face Detection and Gallery Management**class** `ntech.sfapi_client.client.Client`

Represents basic methods to detect faces in images and work with galleries.

detect (*self*, *, *url=None*, *image=None*, *facen=False*, *gender=False*, *age=False*, *emotions=False*, *return_facen=False*, *autorotate=False*, *detector: str = None*, *timeout=None*) → `DetectResponse`
 Detects a face and returns the result of detection.

Parameters

- **url** (*URL*) – image URL if you pass an image that is publicly accessible on the internet
- **image** (*bytes*) – PNG/JPG/WEBP image file if you pass an image as a file
- **facen** (*boolean*) – extract a biometric sample from the detected face. To save the detection result in memcached pass `facen=True`
- **gender** (*boolean*) – extract and return information about gender
- **age** (*boolean*) – extract and return information about age
- **emotions** (*boolean*) – extract and return information about emotions
- **return_facen** (*boolean*) – return `facen` in the method result
- **autorotate** (*boolean*) – automatically rotate the image in 4 different orientations to detect faces in each of them. Overlapping detections with `IOU > 0.5` will be merged
- **detector** (*boolean*) – `nnd` or `normalized`. The `normalized` detector is used to process normalized images, for example, those which are received from `fkvideo_worker`.
- **timeout** (*number*) – FindFace core response timeout, in seconds (if `none`, the default value is used)

Returns Detection result

Return type `DetectResponse` object.

gallery (*self*, *name*)

Returns a gallery object `sfapi_client.Gallery` to refer to it later (for example, to list gallery faces).

Parameters **name** (*string*) – gallery name

Returns a gallery object

Return type `sfapi_client.Gallery`

list_galleries (*self*, *timeout=None*):

Returns the list of galleries.

Parameters **timeout** (*number*) – FindFace core response timeout, in seconds (if `none`, the default value is used)

Returns list of galleries with the fields `name` (a gallery name, *string*) and `number` (the number of faces in the gallery, *number*)

Return type list of `GalleryListItem`

class ntech.sfapi_client.gallery.Gallery

Provides methods to work with galleries and faces.

list (*self*, *, *filters*: typing.Iterable[filters.Filter] = None, *limit*: int = 1000, *sort*: str = "", *page*=None, *ignore_errors*=False, *timeout*=None) → ListResponse

Returns a list-like object with faces from the gallery, that match the given filters. The returned list-like object has an additional property `next_page` which can be used as a value for the `page` parameter in next requests.

Parameters

- **filters** (`sfapi_client.filters.Filter`) – list of filters
- **limit** (*integer*) – maximum number of returned faces
- **sort** (*string*) – sorting order. Pass one of the following values: `id`: increasing order by id, `-id`: decreasing order by id (sorting by id is used if you have NOT specified a feature vector to search for), `-confidence`: decreasing order by face similarity (only if you have specified a feature vector to search for). By default, the method uses the `id` order (no feature vector specified), or `-confidence` (with feature vector).
- **page** – cursor of the next page with search results. The `page` value is returned in the response in the `next_page` parameter along with the previous page results.
- **ignore_errors** (*boolean*) – By default, if one or several `findface-tarantool-server` shards are out of service during face identification, `findface-sf-api` returns an error. Enable this Boolean parameter to use available `findface-tarantool-server` shards to obtain face identification results.
- **timeout** (*number*) – FindFace core response timeout, in seconds (if none, the default value is used)

Returns list with faces from the gallery, that match the given filters.

Return type ListResponse object

add (*self*, *new_id*: typing.Union[int, typing.Callable], *source*: typing.Union[DetectFace, Face, str], *, *meta*: typing.Dict[str, typing.Union[int, str, typing.List[str]]] = None, *regenerate_attempts*=None, *timeout*=None) → Face

Creates a face in the gallery.

Parameters

- **new_id** (*integer or callable*) – custom face identifier (Face ID) in the database gallery. May be a (async) callable which returns the id. To generate id, you can use the `ctx.idgen()` function delivered with the context.
- **source** (`sfapi_client.DetectFace`, `sfapi_client.Face`, `sfapi_client.FaceId`, or *string*) – face source: create a face using another face in the database or a detection result as a source.
- **meta** (*dictionary*) – face metadata. Keys must be strings and values must be either ints, strings or lists of strings. Metadata keys and types must be previously specified in the storage (`findface-tarantool-server`) configuration files.
- **regenerate_attempts** – number of attempts to regenerate a unique Face ID with the `ctx.idgen()` function if `new_id` is callable
- **timeout** (*number*) – FindFace core response timeout, in seconds (if none, the default value is used)

Returns representation of the newly created face

Return type Face object

delete (*self*, *face*: *typing.Union[Face, int]*, *timeout=None*) → None

Removes a face from the gallery.

Parameters

- **face** (*sfapi_client.Face*, *sfapi_client.FaceId* or *id in integer*) – face to be removed
- **timeout** (*number*) – FindFace core response timeout, in seconds (if none, the default value is used)

Returns None

get (*self*, *face*: *typing.Union[Face, int]*, *timeout=None*) → Face

Retrieves a face from the gallery.

Parameters

- **face** (*sfapi_client.Face*, *sfapi_client.FaceId* or *id in integer*) – face to be retrieved
- **timeout** (*number*) – FindFace core response timeout, in seconds (if none, the default value is used)

Returns representation of the face

Return type Face object

create (*self*, *timeout=None*) → None

Creates a gallery in findface-sf-api as a *sfapi_client.Gallery* object. Being a proxy object, *sfapi_client.Gallery* doesn't require a gallery to be existing on the server.

Parameters **timeout** (*number*) – FindFace core response timeout, in seconds (if none, the default value is used)

Returns None

drop (*self*, *timeout=None*) → None:

Removes a gallery from findface-sf-api.

Parameters **timeout** (*number*) – FindFace core response timeout, in seconds (if none, the default value is used)

Returns None

update (*self*, *face*: *typing.Union[Face, str]*, *, *meta*: *typing.Dict[str, typing.Union[int, str, typing.List[str]] = None*, *timeout=None*) → Face

Update face meta data in the gallery.

Parameters

- **face** (*sfapi_client.Face*, *sfapi_client.FaceId* or *id in integer*) – face to be updated
- **meta** (*dictionary*) – face meta data to be updated. Keys must be strings and values must be either ints, strings or lists of strings. If a meta string is not passed or passed as null, it won't be updated in the database.
- **timeout** (*number*) – FindFace core response timeout, in seconds (if none, the default value is used)

Returns representation of the updated face

Return type Face object

Filters for Database Search

class ntech.sfapi_client.filters.**Filter**

Generic class. Represents a list of filters (with assigned values) that have to be applied to the gallery content.

serialize (*self*)

Method that passes the list of filters with assigned values to the findface-sf-api component.

Returns filter names and filter values

Return type `tuple` ('filtername', ["value1", "value2"])

class ntech.sfapi_client.filters.**Id**

Represents methods for filtering gallery content by id. Don't instantiate, use relevant classmethods to call a filter.

classmethod **lte** (*cls*, *value*: *int*) → *Filter*

LTE filter. Select all faces with `id` less or equal to `value`.

Parameters **value** (*integer*) – id value

Returns filter name (LTE) and its value.

Return type object of *Filter* class.

Example: `Id.lte(1234)` selects faces with `id` less or equal to 1234.

classmethod **gte** (*cls*, *value*: *int*) → *Filter*

GTE filter. Select all faces with `id` greater or equal to `value`.

Parameters **value** (*integer*) – id value

Returns filter name (GTE) and its value.

Return type object of *Filter* class.

Example: `Id.gte(1234)` selects faces with `id` greater or equal to 1234.

classmethod **oneof** (*cls*, **value*: *typing.Union[int]*) → *Filter*

IN filter. Select a face(s) with `id` from a given set.

Parameters **value** (*list of integers*) – list of id values

Returns filter name (IN) and its value.

Return type object of *Filter* class.

Example: `Id.oneof(1234, 5678)` selects a face(s) with `id` 1234 and/or 5678.

class ntech.sfapi_client.filters.**Meta**

Represents methods for filtering gallery content by metadata. Don't instantiate, use relevant classmethods to call a filter.

classmethod **lte** (*self*, *value*: *typing.Union[str, int]*) → *Filter*

LTE filter. Select all faces with a metastring less or equal to `value`

Parameters **value** (*string or integer*) – metastring value

Returns filter name (LTE) and its value.

Return type object of *Filter* class.

Example: `Meta('foo').lte(1234)` selects faces with a metastring `foo` less or equal to 1234.

classmethod **gte** (*self*, *value*: *typing.Union[str, int]*) → *Filter*

GTE filter. Select all faces with a metastring greater or equal to `value`

Parameters *value* (*string or integer*) – metastring value

Returns filter name (GTE) and its value.

Return type object of `Filter` class.

Example: `Meta('foo').gte(1234)` selects faces with a metastring `foo` greater or equal to 1234.

classmethod `oneof` (*self*, **value*: *typing.Union[str, int]*) → `Filter`

IN filter. Select a face(s) with a metastring from a given set.

Parameters *value* (*list of strings or integers*) – list of metastring values

Returns filter name (IN) and its value.

Return type object of `Filter` class.

Example: `Meta.oneof(1234, 5678)` selects a face(s) with a metastring 1234 and/or 5678.

classmethod `subset` (*self*, **value*: *str*) → `Filter`

SUBSET filter. Select all faces with a metastring featuring all values from a given set.

Parameters *value* (*list of strings or integers*) – list of metastring values

Returns filter name (SUBSET) and its value.

Return type object of `Filter` class.

Example: `Meta('foo').subset("male", "angry")` selects face with a metastring `foo` featuring all values from the set ["male", "angry"].

class `ntech.sfapi_client.filters.Detection` (`Filter`)

Represents a method that identifies a detected face (searches the database for similar faces).

__init__ (*self*, *id*: *typing.Union[str, objects.DetectFace]*, *threshold*: *float*)

Parameters

- **id** (`objects.DetectFace` or temporary face id in memcached returned by `sfapi_client.Client.detect()`, *string*) – face (detection result) to be identified
- **threshold** (*float*) – identification threshold similarity between faces from 0 to 1.

Example: `Detection(det1, 0.77)` selects faces similar to the detection result `det1` with similarity greater or equal to 0.77.

class `ntech.sfapi_client.filters.Face` (`Filter`)

Represents a method that searches the database for faces similar to a given face from a gallery.

__init__ (*self*, *id*: *typing.Union[str, objects.Face]*, *threshold*: *float*)

Parameters

- **id** (`objects.Face`, `objects.FaceId` or custom face id in the gallery, *string*) – face from a gallery to be identified
- **threshold** (*float*) – identification threshold similarity between faces from 0 to 1.

Example: `Detection(FaceId("gal1", 1234), 0.77)` selects faces similar to the face 1234 from the `gal1` gallery with similarity greater or equal than 0.77.

Several Filters Usage Example

```
filters=[filters.Id.gte(123456), filters.Meta('age').gte(45), filters.Meta('camera').
    ↳oneof('abc', 'def')]
```

Display Error Messages

`class sfapi_client.SFApiRemoteError`

This error message appears if the error occurred for a reason other than a network failure.

The error body always includes at least two fields:

- `code` is a short string in CAPS_AND_UNDERSCORES, usable for automatic decoding.
- `reason` is a human-readable description of the error and should not be interpreted automatically.

Common Error Codes

Error code	Description
UNKNOWN_ERROR	Error with unknown origin.
BAD_PARAM	The request can be read, however, some method parameters are invalid. This response type contains additional attributes <code>param</code> and <code>value</code> to indicate which parameters are invalid.
CONFLICT	Conflict.
EXTRACTION_ERROR	Error upon a face feature vector extraction.
LICENSE_ERROR	The system configuration does not match license.
MALFORMED_REQUEST	The request is malformed and cannot be read.
OVER_CAPACITY	The findface-extraction-api queue length has been exceeded.
SOURCE_NOT_FOUND	The face in the <code>from</code> parameter does not exist.
SOURCE_GALLERY	The gallery in the <code>from</code> parameter does not exist.
STORAGE_ERROR	The biometric database not available.
CACHE_ERROR	Memcached not available.
NOT_FOUND	Matching faces not found.
NOT_IMPLEMENTED	This functionality not implemented.
GALLERY_NOT_FOUND	Matching galleries not found.

`class sfapi_client.SFApiMalformedResponseError`

This error message appears if the error occurred due to a network failure, or if Client was unable to read an API response from findface-sf-api.

3.4.5 Example

The following example illustrates the basics of writing a plugin, as well as the use of classes and methods. This plugin requests face features from findface-sf-api and then sends a request to <FFSEC_URL>/video-detector/process to create an event with the data obtained from findface-sf-api.

You can find this plugin at /opt/ffsecurity/fr_plugin/ffsec_fr_plugin.py. Embed it as described [here](#) and try it out.

Important: Make sure that the FFSEC_URL variable contains the actual IP address and port of the findface-security host.

```
import datetime
import logging
import aiohttp
from dateutil.tz import tzutc
from facerouter.plugin import Plugin
```

(continues on next page)

(continued from previous page)

```

from ntech import sfapi_client
from ntech.asyncio_utils import wrap_future
from ntech.asyncio_utils.noop_cookie import NoopCookieJar
from ntech.tornado_utils import asyncio_to_tornado
# change this if your ffsecurity is located on another host or listens on a non-
↳ default port
FFSEC_URL = 'http://127.0.0.1:8002'
logger = logging.getLogger(__name__)
class FFSecurityPlugin(Plugin):
    def __init__(self, ctx, ffsec_url):
        super().__init__(ctx)
        self.ffsec_url = ffsec_url.rstrip('/')
        self.session = aiohttp.ClientSession(cookie_jar=NoopCookieJar())
        self.future_wrapper = asyncio_to_tornado
    def deactivate(self, *args):
        self.session.close()
    def request_headers(self, request):
        return {
            "Authorization": request.headers['Authorization'],
            'X-Request-ID': request.request_id,
        }
    @wrap_futures
    async def preprocess(self, request, labels):
        # somewhat hacky way to pass data between preprocess and process:
        request.ffsec_reception_timestamp = datetime.datetime.now(tzutc())
        headers = self.request_headers(request)
        async with self.session.post(self.ffsec_url + '/video-detector/preprocess',
↳ headers=headers) as resp:
            resp.raise_for_status()
            resp_json = await resp.json()
            logger.debug("request_id=%r preprocess: ffsecurity response: %r", request.
↳ request_id, resp_json)
            plugin_wants = resp_json['plugin_wants']
            request.ffsec_plugin_wants = plugin_wants
            logger.info("request_id=%r preprocess: ffsecurity requested features: %r",
↳ request.request_id, plugin_wants)
            return plugin_wants
    @wrap_futures
    async def process(self, request, photo, bbox, event_id, detection: sfapi_client.
↳ DetectFace):
        headers = self.request_headers(request)
        with aiohttp.MultipartWriter('form-data') as mpwriter:
            part = aiohttp.payload.BytesPayload(request.params.photo)
            part.set_content_disposition('form-data', name='photo', filename='photo.
↳ jpg')
            mpwriter.append(part)
            part = aiohttp.payload.BytesPayload(b'')
            part.set_content_disposition('form-data', name='face0', filename='norm.png
↳ ')
            mpwriter.append(part)
            part = aiohttp.payload.JsonPayload(request.params.detectorParams)
            part.set_content_disposition('form-data', name='detectorParams')
            mpwriter.append(part)
            part = aiohttp.payload.JsonPayload([list(bbox)])
            part.set_content_disposition('form-data', name='bbox')
            mpwriter.append(part)
            part = aiohttp.payload.StringPayload(request.params.cam_id)

```

(continues on next page)

(continued from previous page)

```

part.set_content_disposition('form-data', name='cam_id')
mpwriter.append(part)
part = aiohttp.payload.StringPayload(request.params.timestamp.isoformat())
part.set_content_disposition('form-data', name='timestamp')
mpwriter.append(part)
part = aiohttp.payload.StringPayload(request.ffsec_reception_timestamp.
→isoformat())
part.set_content_disposition('form-data', name='reception_timestamp')
mpwriter.append(part)
part = aiohttp.payload.JsonPayload(request.ffsec_plugin_wants)
part.set_content_disposition('form-data', name='plugin_wants')
mpwriter.append(part)
if request.params.bs_type is not None:
    part = aiohttp.payload.StringPayload(request.params.bs_type)
    part.set_content_disposition('form-data', name='bs_type')
    mpwriter.append(part)
part = aiohttp.payload.JsonPayload({
    'id': getattr(detection, 'id', None),
    'features': detection.features,
    'bbox': detection.bbox._asdict(),
    'facen': getattr(detection, 'facen', None),
    'attributes': detection.attributes,
})
part.set_content_disposition('form-data', name='detection')
mpwriter.append(part)
async with self.session.post(
    self.ffsec_url + '/video-detector/process',
    data=mpwriter,
    headers=headers
) as resp:
    await resp.read()
    resp.raise_for_status()
    logger.info("request_id=%r process: ffsecurity accepted event", request.
→request_id)
async def activate(app, ctx, plugin_name, plugin_source):
    plugin = FFSecurityPlugin(ctx=ctx, ffsec_url=FFSEC_URL)
    return plugin

```


f

`facerouter.plugin`, [219](#)

n

`ntech.sfapi_client.client`, [221](#)

`ntech.sfapi_client.filters`, [224](#)

`ntech.sfapi_client.gallery`, [221](#)

o

`objects`, [220](#)

Symbols

`__init__()` (*ntech.sfapi_client.filters.Detection method*), 225

`__init__()` (*ntech.sfapi_client.filters.Face method*), 225

A

`add()` (*ntech.sfapi_client.gallery.Gallery method*), 222

B

`BBox` (*class in objects*), 220

C

`Client` (*class in ntech.sfapi_client.client*), 221

`create()` (*ntech.sfapi_client.gallery.Gallery method*), 223

D

`delete()` (*ntech.sfapi_client.gallery.Gallery method*), 222

`detect()` (*ntech.sfapi_client.client.Client method*), 221

`Detection` (*class in ntech.sfapi_client.filters*), 225

`drop()` (*ntech.sfapi_client.gallery.Gallery method*), 223

F

`Face` (*class in ntech.sfapi_client.filters*), 225

`facrouter.plugin` (*module*), 219

`Filter` (*class in ntech.sfapi_client.filters*), 224

G

`Gallery` (*class in ntech.sfapi_client.gallery*), 221

`gallery()` (*ntech.sfapi_client.client.Client method*), 221

`get()` (*ntech.sfapi_client.gallery.Gallery method*), 223

`gte()` (*ntech.sfapi_client.filters.Id class method*), 224

`gte()` (*ntech.sfapi_client.filters.Meta class method*), 224

I

`Id` (*class in ntech.sfapi_client.filters*), 224

L

`list()` (*ntech.sfapi_client.gallery.Gallery method*), 222

`lte()` (*ntech.sfapi_client.filters.Id class method*), 224

`lte()` (*ntech.sfapi_client.filters.Meta class method*), 224

M

`Meta` (*class in ntech.sfapi_client.filters*), 224

N

`ntech.sfapi_client.client` (*module*), 221

`ntech.sfapi_client.filters` (*module*), 224

`ntech.sfapi_client.gallery` (*module*), 221

O

`objects` (*module*), 220

`objects.DetectFace` (*class in objects*), 220

`objects.DetectResponse` (*class in objects*), 220

`objects.Face` (*class in objects*), 220

`objects.FaceId` (*class in objects*), 220

`objects.ListResponse` (*class in objects*), 220

`oneof()` (*ntech.sfapi_client.filters.Id class method*), 224

`oneof()` (*ntech.sfapi_client.filters.Meta class method*), 225

P

`Plugin` (*class in facrouter.plugin*), 219

`preprocess()`, 217

`preprocess()` (*facrouter.plugin.Plugin method*), 219

`process()`, 218

`process()` (*facrouter.plugin.Plugin method*), 219

S

`serialize()` (*ntech.sfapi_client.filters.Filter method*), 224

`sfapi_client.SFApiMalformedResponseError`
 (class in `ntech.sfapi_client.filters`), 226
`sfapi_client.SFApiRemoteError` (class in
 `ntech.sfapi_client.filters`), 226
`shutdown()`, 218
`shutdown()` (`facrouter.plugin.Plugin` method), 220
`subset()` (`ntech.sfapi_client.filters.Meta` class
 method), 225

U

`update()` (`ntech.sfapi_client.gallery.Gallery` method),
 223